




## RECESSED TRI-COLOUR DOWNLIGHT

- Die-casting Aluminium body
- Powder coated finish
- Polycarbonate diffuser
- SMD LED chips
- Come with constant current LED driver
- Non-dimmable
- IP54 weatherproof front only
- 1.2m Flex & Plug
- CRI>80
- Power factor: >0.9
- Efficacy: >85lm/W
- Lifespan: 50,000Hrs
- Fixed
- Operating Ambient Temp: -15~45°C
- Electrical Classification: Class II
- Warranty: 5 Years

# DAINTREE

EDL106-3 TC WH  
EDL106-4 TC WH  
EDL106-5 TC WH

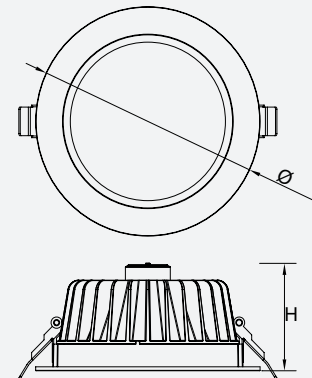

## TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE	POWER	LUMEN	COLOUR TEMPERATURE	BEAM ANGLE	DIMENSIONS (Ø×H)	CUT OUT	FITTING COLOUR
EDL106-3 TC WH	240V	18W	1550/1650/1700lm	3000/4000/6000K	90°	162 x 82 mm	145 mm	White
EDL106-4 TC WH	240V	25W	2100/2250/2350lm	3000/4000/6000K	90°	193 x 94 mm	165 mm	White
EDL106-5 TC WH	240V	35W	3000/3150/3300lm	3000/4000/6000K	90°	230 x 106 mm	200 mm	White