

2 Post Asymmetrical Lift



RSC-10000



LIFT CONSTRUCTION

- High quality components and technology.
- 5mm column steel plates.
- 8mm brace arm and 6mm internal sliding column, never deform.
- Wearable, Anti-High temperature, high strength oiliness macromolecule nylon slide block.

SAFETY FEATURES



- Double safe Antiskid device, from Column ladder safe to close protection by dynamic hydraulic pressure, Ensure double safe stay for vehicle.
- Chain style pulling device, make the security parameter up to 5 times.
- Equipped upper beam. Enhance the lifting capacity.
- Equipped emergency limit switch to ensure the lifting height safety.

POWER UNIT

- Double cylinder dynamic hoist drive device.
- Aluminum pump device, running time without any break down for at least 40,000 hours.
- Mechanical control hydraulic pressure configuration. Simple, enduring and reliable.



2 Post Asymmetrical Lift

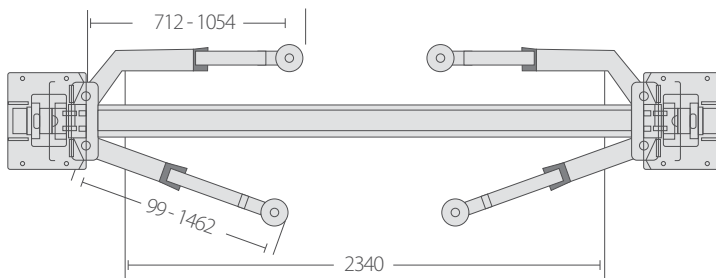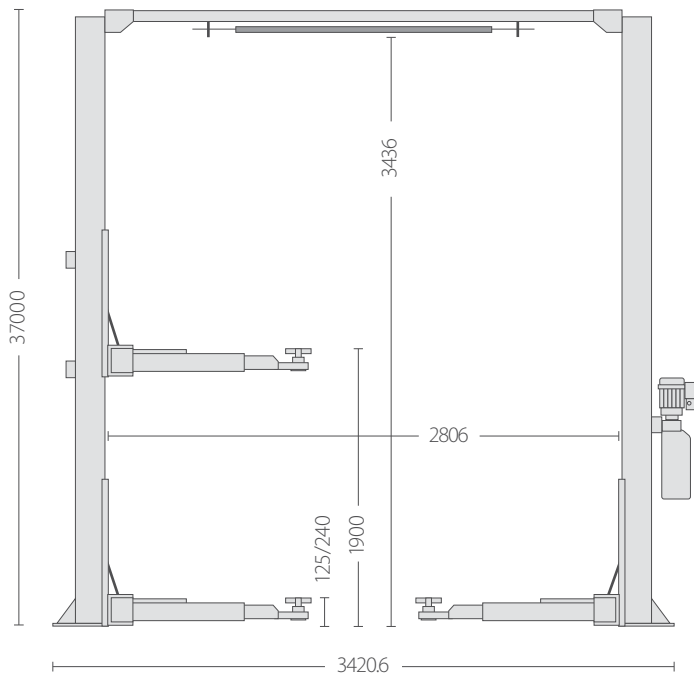

SPECIFICATION	RSC-10000
Lifting capacity	4000 kg
Max lifting height	1800 (mm)
Min lifting height	125 (mm) / optional 85 mm
Lifting time	50 sec
Lowering time	40 sec
Motor power	2.2 kw
Electric supply	3HP/ 220V / 60 Hz
Overall height	3700 (mm)