

Data Sheet: WWK

- › WWK 222
- › WWK 222 H
- › WWK 302
- › WWK 302 H



- › Engineered by Germany's market leader
- › Designed for Australian conditions
- › Active defrost function ensures energy-efficient operation down to -5°C
- › High operational reliability and long service life due to impressed current anode
- › Quiet operation due to encased compressor
- › Connects to solar PV – automatically increases tank temperature during peak solar production*
- › Compatible with Energy Management System for optimal use of grid and solar energy
- › H-models come with 1.7 kW smart element





INEXPENSIVE HOT WATER OUT OF THIN AIR

The WWK 222 (H) and the WWK 302 (H) are compact domestic hot water heat pumps designed specifically for outdoor installation in Australia to supply domestic hot water to several draw-off points. Our heat pumps utilise the energy in the air to create environmentally friendly hot water all year round. SG Ready implementation of connecting the STIEBEL ELTRON WWK hot water heat pump allows for a higher water temperature and more “free” hot water.




WWK



Model	PREMIUM			
	WWK 222	WWK 222 H	WWK 302	WWK 302 H
	231209	233209	231211	232905
Power consumption heat pump (EN16147 A15)	kW 0.55	0.55	0.55	0.5
Power consumption smart element	kW N/A	1.7	N/A	1.7
Rated capacity	L 220	220	302	302
Maximum available nominal amount of hot water at 40 °C	L 360	360	540	540
Type of installation	Indoor or outdoor [‡]			
Set hot water temperature	°C 61	61	61	61
Max. hot water temperature	°C 65	65	65	65
Operating temperature range	°C -5 - 42	-5 - 42	-5 - 42	-5 - 42
COP (seasonal average [†])	3.94	3.94	3.58	3.58
Max. permissible pressure [#]	kPa 500	500	500	500
PTR valve	kPa 850	850	850	850
Air flow rate	m ³ /h 550	550	550	550
Connection	1/N/PE	1/N/PE	1/N/PE	1/N/PE
Rated voltage	V 240	240	240	240
Max. operating current	A 3.18	9.70	3.18	9.70
Sound pressure level at 1m distance, free field (EN 12102)	dB(A) 45	45	45	45
Electrical installation	As per AS/NZS3000			
Refrigerant	R134a	R134a	R134a	R134a
Height (adjustable feet)	mm 1553 - 1569	1553 - 1569	1921 - 1937	1921 - 1937
Diameter	mm 690	690	690	690
Weight (empty filled)	kg 120 340	120 340	135 437	135 437
Approvals	WaterMark Lic No. WMKA00301, AS3498			

WWK Dimensions

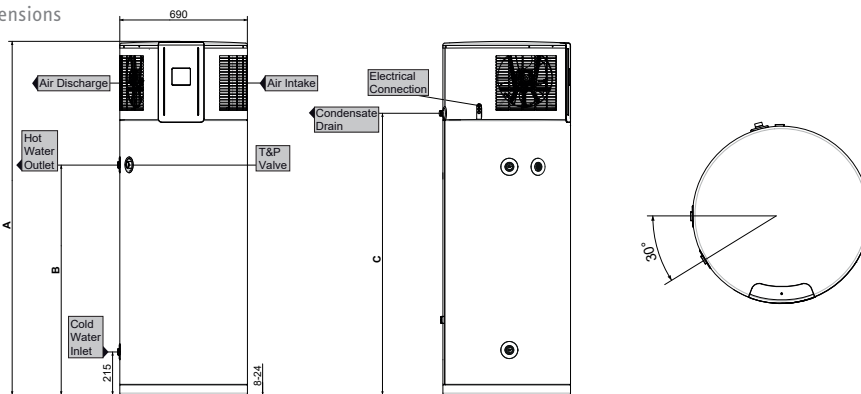

OVERALL HEIGHT [A]
 WWK 222 / 222 H = 1501
 WWK 302 / 302 H = 1905

HOT WATER OUTLET / T&P VALVE HEIGHT [B]
 WWK 222 / 222 H = 935
 WWK 302 / 302 H = 1290

CONDENSATE HEIGHT [C]
 WWK 222 / 222 H = 1116
 WWK 302 / 302 H = 1502

* External relay/switch required † Indoor installation requires a clear space of 13m³

‡ Seasonal average COP for a WWK installed in climate zone HP2-AU (AS/NZS 4234, CER) #In accordance with AS/NZS3500.4 accordance with AS/NZS3500.4

STIEBEL ELTRON is committed to our policy of continual improvement, some features may have subsequently been changed or even removed.

Our advisors will be happy to consult with you regarding the currently applicable equipment features. The images used in this data sheet are for reference only.