



ATLANTIS® FLO-WALL®

Vertical Infiltration Solutions

The panels are pre-wrapped in quality geotextile and are available in various sizes. Panels can be connected together create any size and suit all projects.



Scan the code for more information about our products

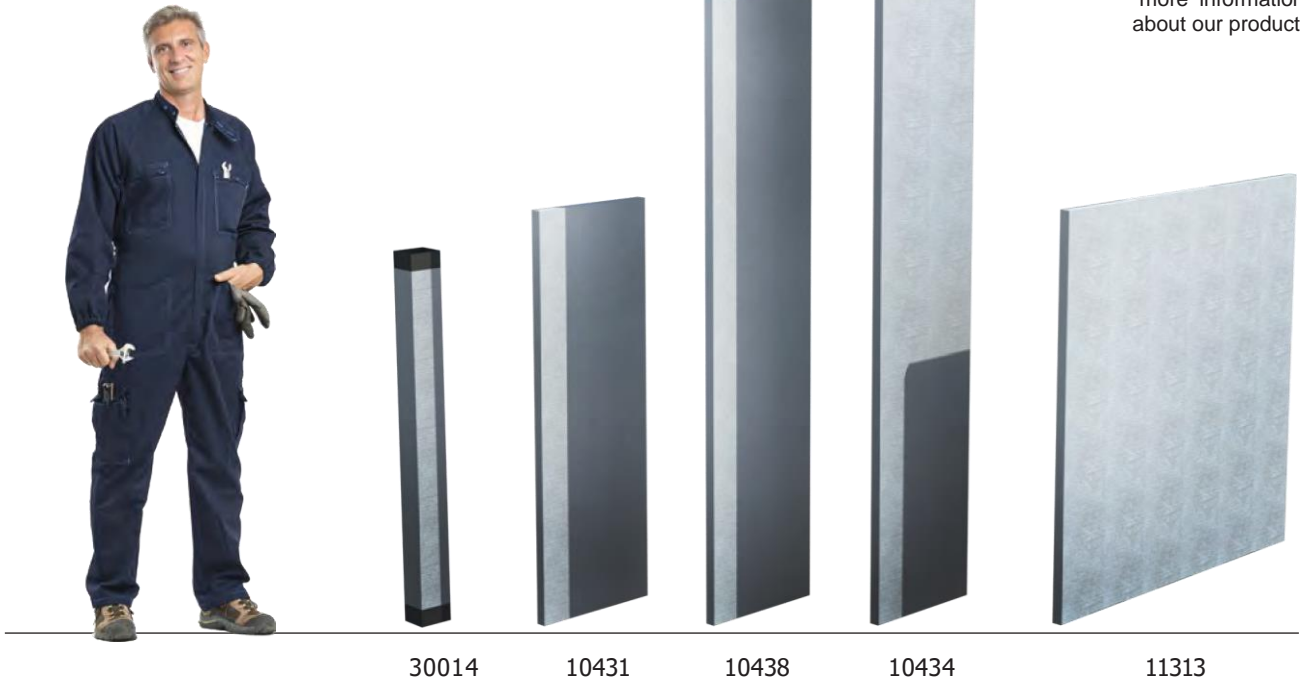

*Custom Sizes available upon request

Part Number	30014	10431	10438	10434	11313
Width	100 mm	575 mm	575 mm	575 mm	1150 mm
	3.93 in	22.64 in	22.64 in	22.64 in	45.23 in
Height	1080 mm	1150 mm	1725 mm	2300 mm	1150 mm
	42.52 in	45.23 in	67.91 in	90.55 in	45.23 in
Thickness	80 mm	30 mm	30 mm	30 mm	30 mm
	3.14 in	1.18 in	1.18 in	1.18 in	1.18 in
Part Weight	0.62 kg	1.30 kg	1.95 kg	2.60 kg	2.60 kg
	1.37 lbs	2.87 lbs	4.30 lbs	5.73 lbs	5.73 lbs
Vertical Flow Rate per panel*		8.51 L/sec/m.width	8.51 L/sec/m.width	8.51 L/sec/m.width	8.51 L/sec/m.width
Void Ratio	Volume Void: 90%			Surface Void: 70%	
Material	85% Recycled polypropylene, 15% Atlantis proprietary selected materials				
Colour	Black				
Chemical and Biological Resistance	Excellent resistance to urine, acids, alcohols, bases and mineral oils, good resistance to aldehydes, esters, aliphatic hydrocarbons, ketones and vegetable oils.				
Service Temperature	-10°C to 70°C (14°F to 158°F)				
Approximate Material Lifespan	100 years + with no ultra violet exposure				

*Panel is positioned vertically as per graphics above with gravity flow. Hydraulic gradient (HG)=1.0.

Note: Atlantis® product specifications are updated on a regular basis. Please contact Atlantis® technical department for the latest data sheet available