

M-66

VALVE & BOX LOCATOR METAL DETECTOR



Fisher's M-66 Valve and Box Locator is designed specially for finding buried or paved over valves, boxes or vaults. In addition, the M-66 locates survey markers, water or gas meters, conduit, manholes and any other concealed metallic object.

The M-66 detects all metals including aluminum, brass, copper, iron, nickel, steel or tin.

Combining sensitivity and accuracy with maximum ground penetration, the M-66 eliminates any guesswork when pinpointing hidden metallic objects.

The electronic balance of the M-66 is easily and quickly tuned for detection within seconds while also allowing for maximum audio and visual indications.

In the Fisher tradition, the M-66 is affordable, tough, and simple to use while providing maximum performance. A two year limited warranty comes standard with the unit.

Features

- Simple operation - only 2 knobs
- Ultra-sensitivity and maximum penetration through soil, asphalt or concrete
- Ground rejection VLF (very low frequency) eliminates false signals
- Detects all metals
- Built-in battery test
- Analog meter and audio target signal
- Adjustable shaft
- Fully submersable 8 inch search coil
- Weather resistant design

since 1931

find it

with

FISHER M-SCOPE®

FISHER RESEARCH LABORATORY

200 W. Willmott Rd., Los Banos, CA 93635-5501

T 209.826.3292 F 209.826.0416 website: www.fisherlab.com email: info@fisherlab.com

Fisher offers an extensive range of electronic detection instruments designed to meet the needs of the utility industry. From pipe & cable locators, valve & box locators, sound & leak detectors to water level indicators, find it... with Fisher.


M-66 specifications



Specifications subject to change without notice.

M - 66

- Search Loop Configuration Double D (direct wired)
- Output Frequency of Loop 4.5kHz
- Output Indication Speaker 16ohm impedance
..... Audio frequency 450Hz
- Power Supply 9V each
- Power Consumption (-9V) 17 mA
..... (+9V) 4mA min, 6mA sound
..... threshold, 125mA max sound
- Weight with 8" coil 4.25 lbs.
- Operating Temp -4° to +158°F (-20° to +70°C)
..... search loop immersible in water
- Dimensions Length 28" to 48" adjustable
..... (71cm to 122cm)
- Shipping Weight 7 lbs.
- Shipping Dimensions 34.75" x 12.75" x 5.25"
..... (88.3 x 32.4 x 13.3cm)

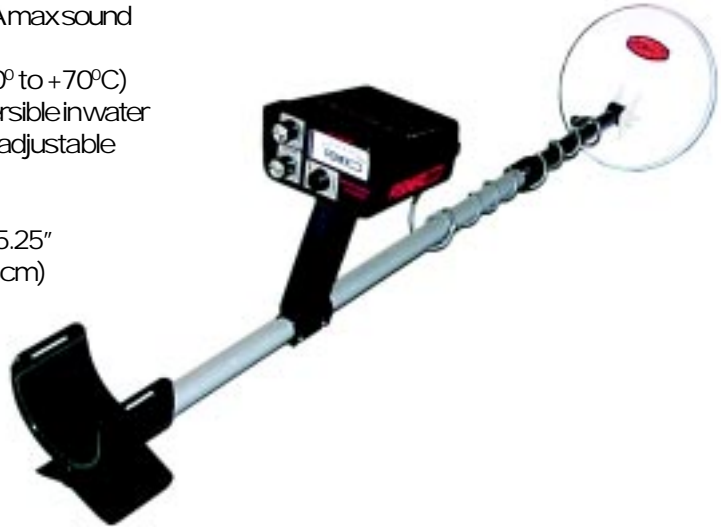

2-Year Warranty

Fisher Research Laboratory warrants the M-66 to be free of defects in materials and workmanship when it is shipped from the factory. The terms of this warranty are fully explained in a warranty registration card that accompanies the instrument. Complete factory and field service facilities support the warranty. *Warranty may vary outside the U.S. See your distributor for details.

Ordering Information

US & Canadian Customers Contact:

Fisher Research Laboratory

200 W. Wilshire Blvd., Los Angeles, CA 90055-1550
 T 209.328.3228 F 209.328.6209 email: info@fisherlab.com

All Other Countries Contact:

Export Department

282 State Street, North Haven, CT 06473 USA,
 T 203.288.1638 F 203.287.8099
 email: fisher@exportdept.com

Underground Detectors and Locators Since 1931

FISHER RESEARCH LABORATORY