

IMS UNIMIG 200-4

SINGLE PHASE MIG-MAG - 25 → 200 A

Ref. 065956



200 Amp, single phase MIG welder with 4 roll wire feed system and semi-synergic control panel. Controlled by microprocessor, set up is quick and easy with the machine controlling wire speed, this function avoids complex set up and ensures optimum welding performance.

PRODUCT

In « Synergic » mode, setting is fast and simple. The Micro processor controller will automatically set the optimum wire speed. This avoids complex set-up and ensures optimum welding parameters.


HIGH PERFORMANCE SINGLE PHASE

Rectified current smoothed by capacitors giving produces:

- Optimum fusion
- Reduced spatter

CAPACITOR INSIDE → PERFECT WELD

UNIMIG 200-4 & 250-4

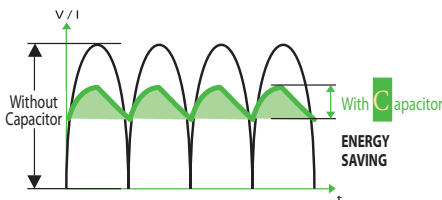

Four roll wire feed – Ideal for use with soft wires e.g. aluminium and also works well with steel wires protecting the wire coating from fouling the torch liner.

3 FUNCTIONS AVAILABLE

- **Normal**
- **Spot:** Spot welding with adjustable spot diameter
- **Delay:** « Chain spot » function (Spot welding with time adjustment between 2 spots).

SYNERGIC MODE FOR EASY AND QUICK SETTINGS

• **With this function, the wire speed setting is Automatic.**

Simply select:

- the wire type
- the wire \varnothing
- the power

UNIMIG 200-4 sets the optimum wire speed for you.

- **Save the last settings.**



- Included :
- 1 torch 250 A (3m)
 - Earth clamp (2m)

ACCESSORIES

Torch MB25 kit (250A)
(Not included)



Ref. 041233

Composition:

- Contact tips:
 - $\varnothing 0,8$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 steel/stainless (x 5)
 - $\varnothing 1,0$ M6 Alu (x 5)
- Contact tips supports 250A (x 3)
- Springs for nozzle (x 5)
- Nozzles 250A (x 3)

| 50/60 Hz | A | A | GAS | NO GAS | 200 | 300 | Electronic Control | m/min | équipé d'origine / original equipment / originalausstattung / equipamiento de fabrica | EN 60974-1 (40°C) | U ₀ | cm | kg | IP | Protected & compatible power generator (+/-15%) |
|-------------|----|----------|-----------------|--------|-----|-----|--------------------|--------|---|-------------------|----------------|----------------|----|-------|---|
| 230 V 1~ | 16 | 25 → 200 | 0.6 - 1.0 | - | ✓ | ✓ | ⊕ | 1 → 15 | 0.8 1.0 | X (40°C) | V | 74 x 63.5 x 33 | 60 | IP 21 | 9 kVA |