




DOCTOR CHARGE 130 230V 12V/24V

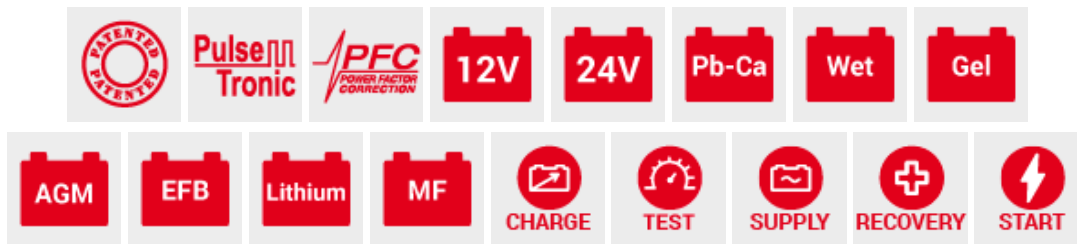

Overview

DOCTOR CHARGE 130 230V 12V/24V

cod. 807599

Electronic BATTERY MANAGER for total maintenance of WET, GEL, AGM, MF, PbCa, EFB and Li batteries at 12/24V and for support activities when intervening on vehicles in workshops, repair shops and car dealer premises.

The innovative Power Stream technology guarantees better performance, up to 50% more than traditional battery chargers.

The Pulse Tronic technology guarantees optimal battery charging over 8 phases.

Doctor Charge 130 carries out 5 functions:

1. automatic charge and maintenance of batteries with PULSE TRONIC technology, even in difficult environmental conditions (low temperatures);
2. battery tests such as voltage at terminals, starting capacity (CCA) and operational check of the vehicle alternator;
3. recovery of sulphated or very discharged batteries, and recovery of optimal operation with periodic regeneration;
4. stable power supply source for battery changes (to protect the on-board electronics), for diagnostic activities (operation checks carried out on the vehicles), for keeping the batteries of display vehicles in showrooms operational;
5. vehicles start.

Based on the SMPS (Switch Mode Power Supply) Technology. In case of black-outs or repetitive uses Doctor Charge 130 can set itself at the last settings carried out. Many protections available.

Fit with PFC device.



1 PH 230V



TRACTOR



EAC CERTIFICATION



MOTORCYCLE



VAN



SEMKO CERTIFICATION



CAR



CE MARKING



TÜV SUD CERTIFICATION



DOCTOR CHARGE 130 230V 12V/24V



BOAT

Technical data

CODE	CODE 807599	A_{EFF}	EFFECTIVE CHARGING CURRENT 140 / 70 A	W H L	DIMENSIONS 20 - 26 - 34 cm
V_{1PH}	SINGLE PHASE MAINS VOLTAGE 230 V	A_{EN}	RATED CHARGE CURR. EN60335-2-29 120 / 60 A	kg	WEIGHT 6 kg
F	MAINS FREQUENCY 50 / 60 Hz	A_{1V/C}	START CURRENT 1V/C EN60335-2-29 180 A	BAR CODE	EAN CODE 800489706429 1
P_{CHARGE}	CHARGE POWER 1,8 KW	C_{MIN}	MIN. RATED REFERENCE CAPACITY 20 Ah		PIECES/PALLET 30 pz/pallet
P_{START}	START POWER 2 KW	C_{MAX}	MAX RATED REFERENCE CAPACITY 1200 Ah		PIECES/PALLET - B 24 pz/pallet - B
BATTERY	CHARGING VOLTAGE 12 / 24 V		ADJUSTMENT POSITIONS 7		

Included Accessories

null - 125000