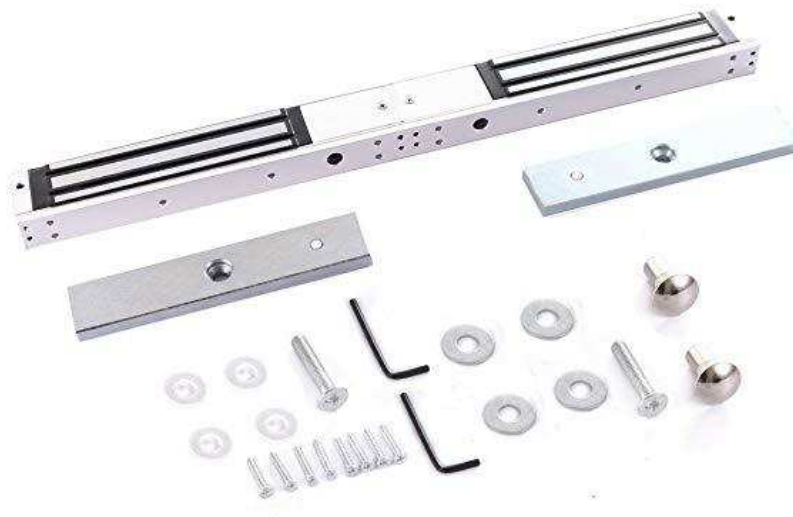# Double Magnetic Lock (600lb) With LED

Double magnetic lock (600lb) with red LED for wooden, glass, metal, and fireproof door
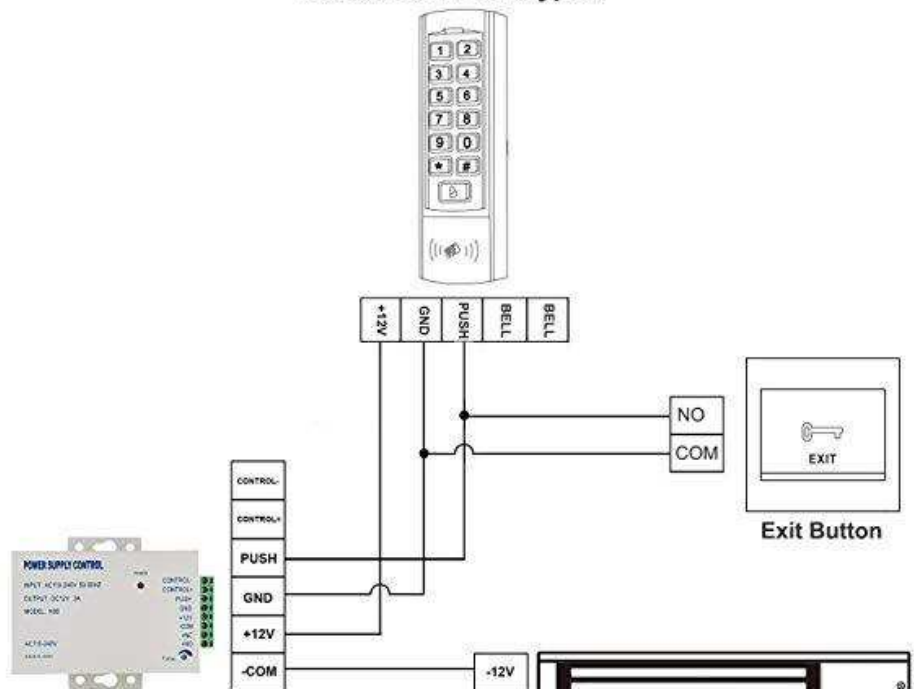
Features:

- Holding Force: 280kgx2 / 600Lbsx2
- Input Voltage: 12 or 24V DC
- Current Draw: 12V/500mAx2 / 24V/250mAx2
- Surface Temp: ≤ 20℃ / 68℉
- Operating Temp: -10-55℃ (14-131℉)
- Humidity: 0~90% (non-condensing)
- Cover Finish: Anodized aluminum
- Lock Finish: Zinc
- Armature Plate Finish: Zinc
- Size: 500Lx48.5Wx25Hmm (19.69Lx1.91Wx0.98Hin)
- Armature Plate Dimension: 180Lx38Wx11Hmm (7.09Lx1.5Wx0.43Hin)
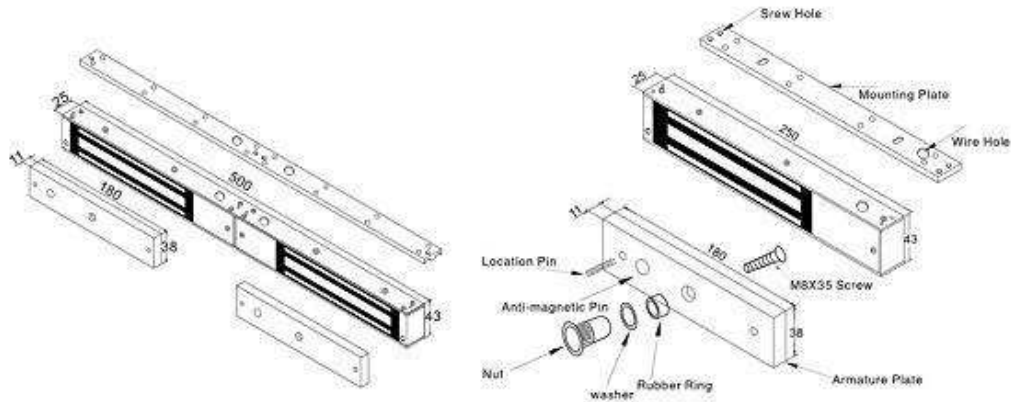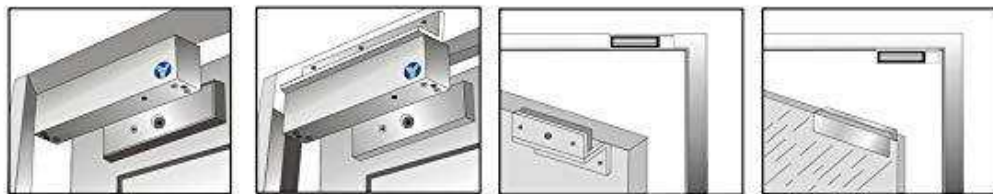- Weight: 4.2kg (9.26lb)

Wiring Diagram:

Access Control Keypad

Terminal labels: +12V | GND | PUSH | BELL | BELL

NO
COM

EXIT

Exit Button

POWER SUPPLY CONTROL
INPUT AC10-240V 50/60HZ
OUTPUT DC12V 3A
MODEL: K80
AC10-240V

CONTROL-
CONTROL+
PUSH
GND
+12V
-COM

-12V

Diagram (unit:mm)

Srew Hole
Mounting Plate
Wire Hole
Location Pin
M8X35 Screw
Anti-magnetic Pin
Nut
washer
Rubber Ring
Armature Plate

Installation Instruction

Demonstration of I Bracket Installation

Demonstration of L Bracket Installation

Demonstration of ZL Bracket Installation

Demonstration of UL Bracket Installation

Malibu Club Systems Inc.   Item: MAC-006-DMLL   support@malibuclubsystems.com