



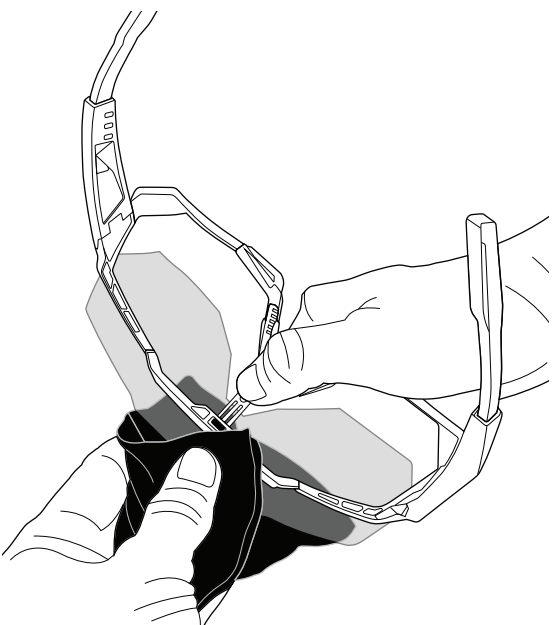

LENS REPLACEMENT INSTRUCTIONS

Lens Removal:



1. Firmly hold the top frame of the glasses between your thumb and index finger. With your other hand press the lever to release the locking tab from the top of the frame. Gently pull the top of the frame off of the lens. Useful Tip: Use the microfiber bag included with your glasses when grasping the lens to prevent scratches.

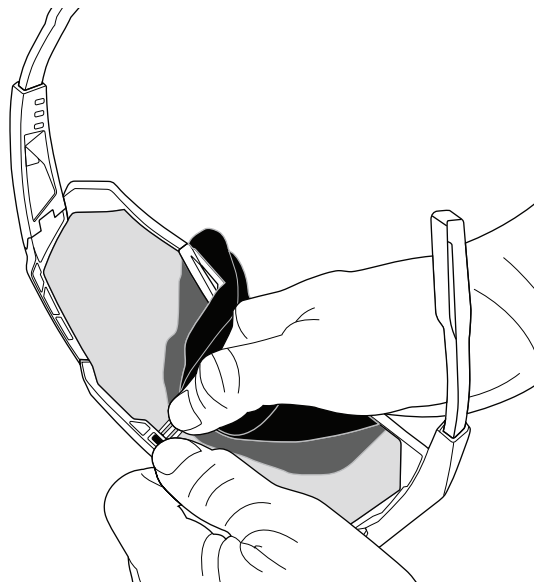

2. Once the corner mounting tabs are free, continue pulling the lens until it easily releases from the frame.



Lens Installation Steps:

1. Hold the nose area of the glasses frame with one hand and gently insert the lens into the lens channel of the frame.

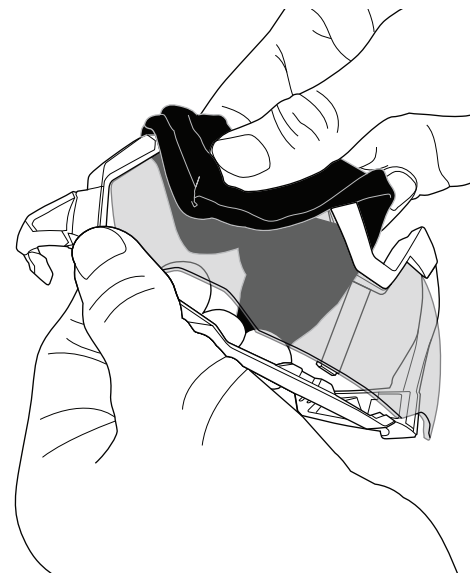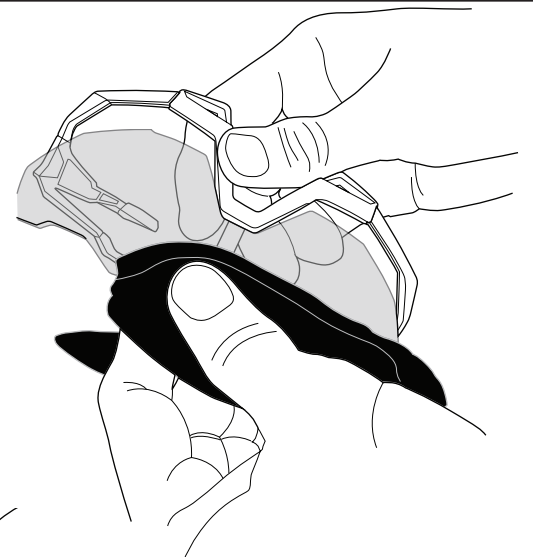

2. On each side of the glasses gently pull the frame so the lens locks into the frame lens channel.

3. Once the lens is correctly inserted into the channel, gently apply pressure to the center top of the frame so the mounting tab at the top of the lever locks in place.

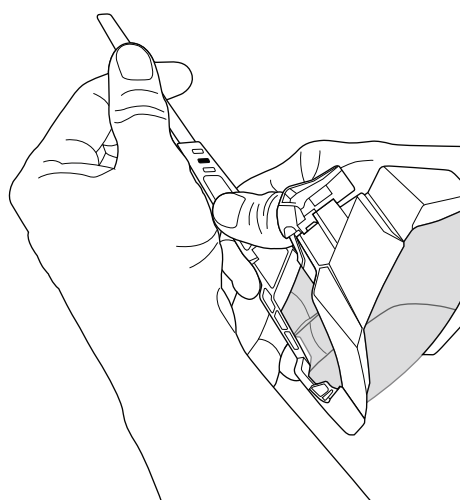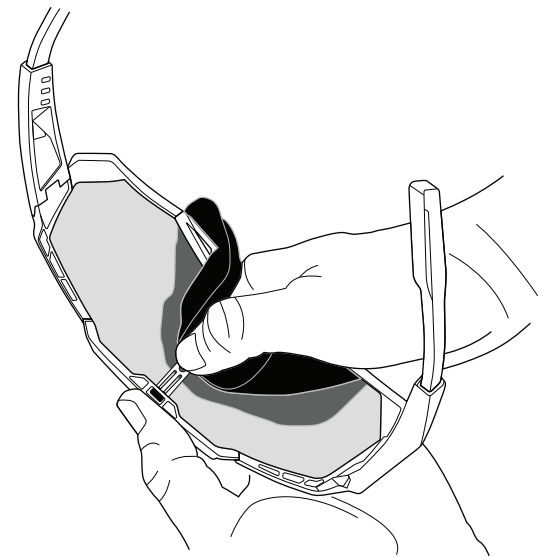

Arm Length Adjusta- bility:

The SPEEDTRAP is equipped with 3 different arm length adjustability settings for a customized fit. To adjust, firmly hold the base of the arm and pull or push the end of the arm into the 1, 2 or 3 custom lengthening positions. The arm is locked into position once the tab locks into the desired position.

THE SPEEDTRAP



www.ride100percent.com