


LENGTH: "L"	2FT(610±30)	3FT(915±30)	4FT(1220±50)	5FT(1530±50)	6FT(1830±50)	6.56FT(2000±50)
BLACK#	GPC-3318-02BLK	GPC-3318-03BLK	GPC-3318-04BLK	GPC-3318-05BLK	GPC-3318-06BLK	GPC-3318-066BLK
RED# GY-49	GPC-3318-02RED	GPC-3318-03RED	GPC-3318-04RED	GPC-3318-05RED	GPC-3318-06RED	GPC-3318-066RED
WHITE# RAL9010	GPC-3318-02WHT	GPC-3318-03WHT	GPC-3318-04WHT	GPC-3318-05WHT	GPC-3318-06WHT	GPC-3318-066WHT
BLUE# PT293C	GPC-3318-02BLU	GPC-3318-03BLU	GPC-3318-04BLU	GPC-3318-05BLU	GPC-3318-06BLU	GPC-3318-066BLU

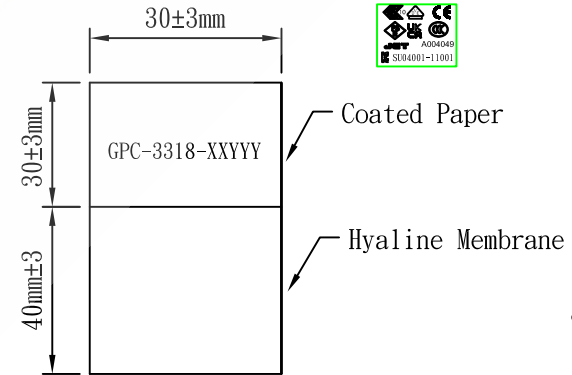

Sample Drawing NO.: SP210816-04

Packing: Bundled to ease installation.

NO.	SPECIFICATION	QTY	REMARK
1	PSE HVCTF 2.0/3C+H05VV-F 1.5/3C+SJT 15/3C	1PC	
2	TER:97606BS-1	2PCS	
3	TER:97607BS-1	1PC	
4	YP-33 INNER BODY	1PC	
5	YP-33 PVC PLASTIC:50P	32g/PC	
6	YC-18 PVC PLASTIC:50P	25g/PC	
7	YC-18 INNER BODY	1PC	
8	YC-18 TER	3PCS	
9	LABEL:(40+30)*30mm	1PC	

Yung Li Co., Ltd. H05VV-F 3G 1.5mm<sup>2</sup> <VDE> SAA-190646-EA SU01027-4002  
 A004049 60227 IEC 53(RVV) 300/500V c(UL)us E241374 SJT 3/C 15AWG(1.65mm<sup>2</sup>) 105°C  
 300V VW-1 <PS>E JET HVCTF 3X2.0mm<sup>2</sup> -F-

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved	Date		<b>SIGNAL+POWER</b>				
	Checked	Date						
	Drawn	SUKI	Date	21.08.16	Customer			
	Cat. No.	YP-33/YC-18			P/N.			
	Drawing No.	Rev.	B	Material	P.V.C	Unit	mm	
			Scale					