

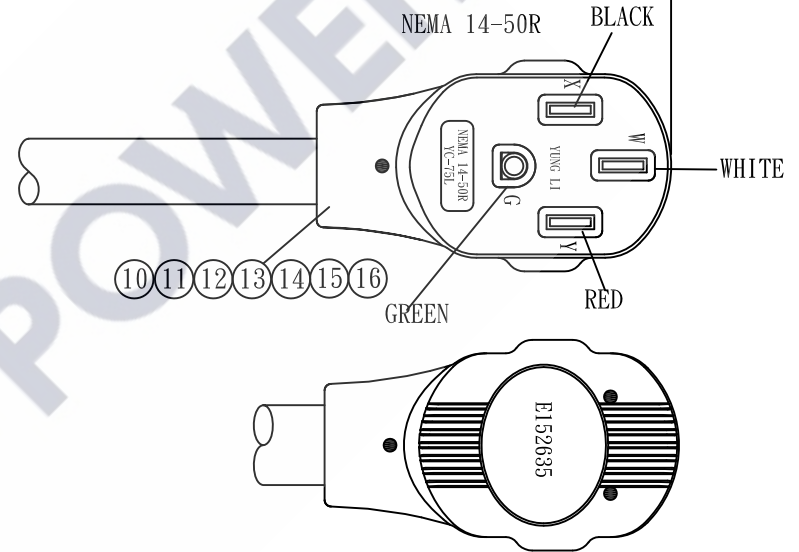


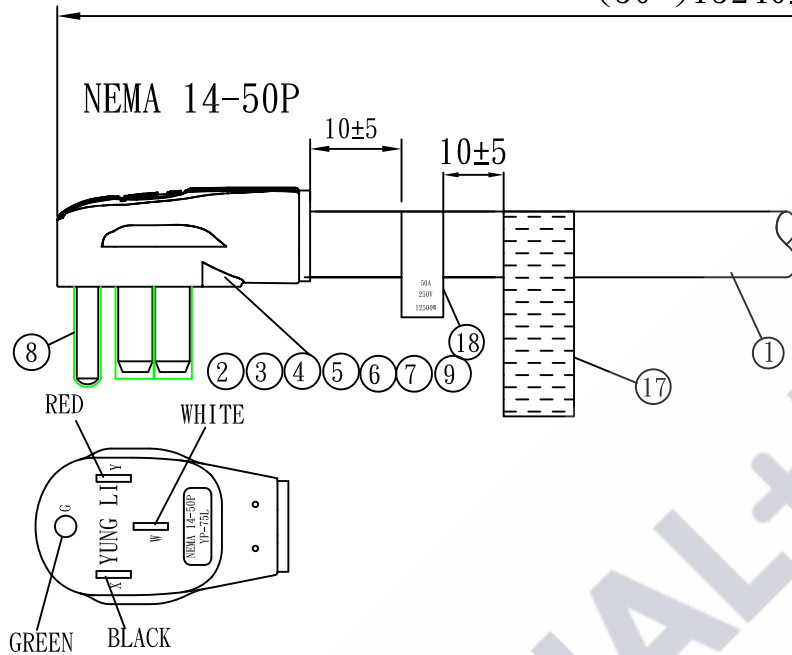

(50') 15240±200



Packing: Bulk Pack.

NO.	SPECIFICATION	QTY	REMARK
1	SOOW 6/4C 90°C BLACK	1PC	
2	YP-75L PVC PLASTIC:35P BLACK	56g/PC	
3	YP-75L INNER BODY	1PC	
4	"G" TER: 98479ABS-0	1PC	
5	"X" TER: 97650ABS-0	1PC	
6	"Y" TER: 97650ABS-0/RP	1PC	
7	"W" TER: 97650BBL-0	1PC	
8	SLEEVE	1PC	
9	RING: $\phi 26.0 \times 4.0 \times 1.0$ mm	1PC	
10	YC-75L PVC PLASTIC:35P BLACK	45g/PC	
11	YC-75L INNER BODY	1PC	
12	"G" TER: XDOP001983	1PC	
13	"X" TER: 95770ABL-0	1PC	
14	"Y" TER: 95770BL-0	1PC	
15	"W" TER: XDOP001996	1PC	
16	RING: $\phi 26.0 \times 4.0 \times 1.0$ mm	1PC	
17	Warning Label: 230*36mm	1PC	Label-205
18	UL LABEL: 50A 250V	1PC	

Sample Drawing No.:
SP200724-14

Tolerance >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	Approved	Date	SIGNAL+POWER			
	Checked		Date			
Drawn	SUKI	Date	20.07.24	Customer		
Cat. No.	YP-75L/YC-75L		P/N.	P-75L75L-50B-64SOOW		
Drawing No.	Rev.	B	Material	P. V. C	Unit	mm
			HEFT(g)			