

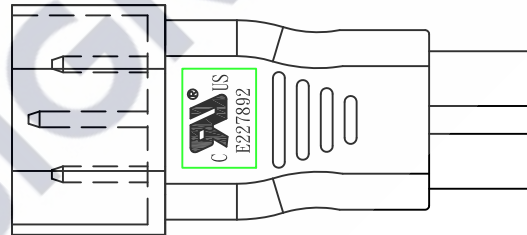

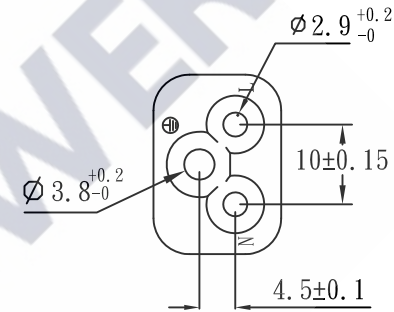
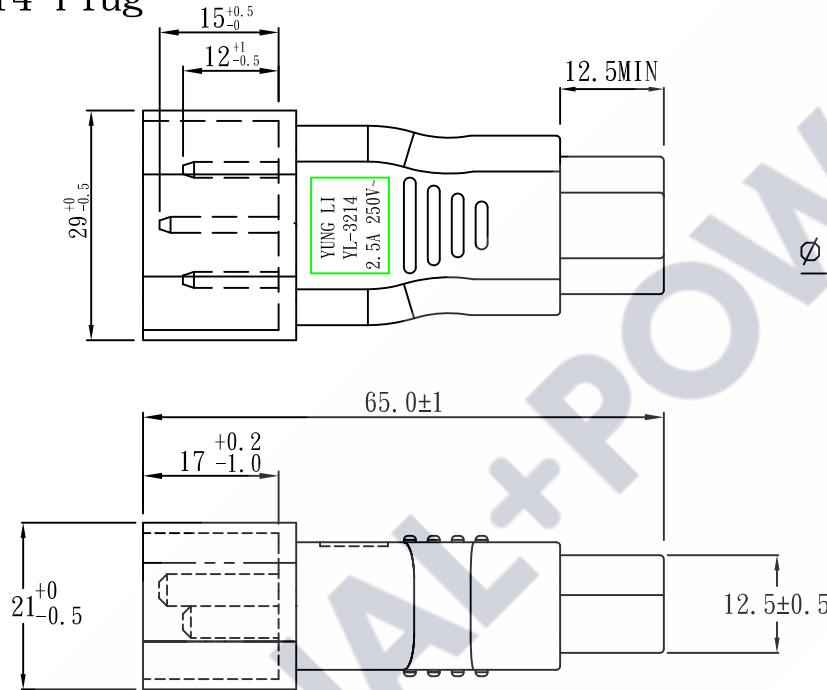


# IEC 60320 C5 to IEC 60320 C14 Plug

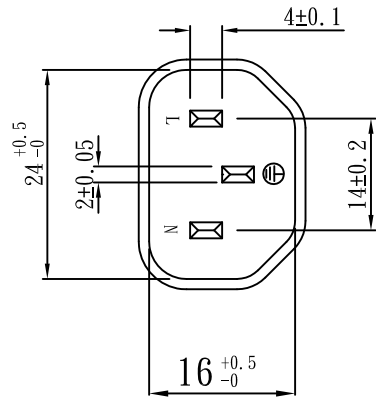

## Note:

1. Rating: 2.5A 250V
2. Insulation Resistance: 100MΩ
3. Dielectric Voltage: 2000V/sec

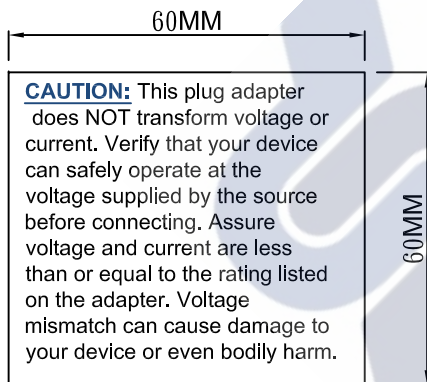

TOLERANCE >0±0.30 >1.0±0.50 >10.0±1.0 >20.0±2.0 Angle: ±1°	APPROVED		DATE		SIGNAL+POWER			
	CHECKED		DATE					
	DRAWN	SUKI	DATE	21.08.04	Customer			
	TYPE	YL-3214			P/N			
	DRAWING NO.	CY-A3214-09	REV	B	MATERIAL	P. V. C	UNIT	mm
				HEFT(g)	28			