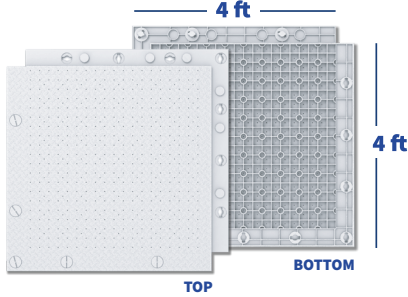
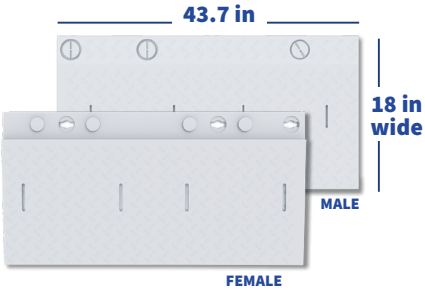


PRODUCT SPECIFICATIONS

RAMP SPECIFICATIONS

| |  |  |
|-----------------------------|--|--|
| MODULE SIZE | <p>ACTUAL PANEL DIMENSIONS 4 ft L x 4 ft W x 1½ in H (16 ft²) 1.2 m x 1.2 m x 3.8 cm (1.49 m²)</p> <p>USABLE PANEL DIMENSIONS 43.625 in X 43.625 in (13.216 ft²) 1.108 m x 1.108 m (1.23 m²)</p> | 43.75 in x 18 in x 1.5 in |
| WEIGHT | 30.5 lbs (13.8kg) | 13.5 lbs |
| COMPRESSION STRENGTH | 225 psi (1551.32 kps) | |
| COLOR | Translucent white or grey | |
| MATERIAL | Virgin HDPE Plastic | Virgin HDPE Plastic |
| TEMPERATURE RANGE | -4° F – 113° F (-20° C – 45° C) | |
| BURN RATING | UL 94-HB | |
| DESIGN FEATURES | Diamond surface texture, open back design, aeration holes, overlapping/underlapping flanges enhance load spread and create a smooth surface | Female and male configuration adjoin with appropriate edge of the panels. Pairs of panels are used to create build joints. Meets ADA compliance requirements (US). |
| CONNECTION SYSTEM | Preinstalled nylon cam locks; vertical locking system – no loose parts T-bar locking tool | |
| SHIPPING CAPACITY | US Standard 48 ft flatbed truck: 840 panels/11,340 ft ² (1053.52 m ²) | |