

REMOTE THROWING SYSTEM SPECIFICATION

Patent-Pending Design




OVERVIEW

Until the Perfect mARC remote bird launcher, trainers have had to compromise performance for stow-ability. The Perfect mARC launcher combines the size convenience of a mini and the throwing performance of a large launcher in one.

With our innovative telescoping frame design, trainers are able to optimize the arc by extending the aluminum frame to three different sizes. The frame's unique design features NetZero technology, providing the most stable and reliable throwing platform in the industry. In addition, the Perfect mARC RollerGlyde release trigger system uses friction minimizing rollers to ensure a reliable launch every time. This allows you to focus on the line to the bird, not the line on the trigger of your launcher.

When finished training, retract and fold the frame flat for easy storage and transportation. The innovative SlotSlide cam system and CrossKeeper stowing ensures a hassle-free teardown by eliminating the need for hinges and leg clips.

FEATURES AND BENEFITS

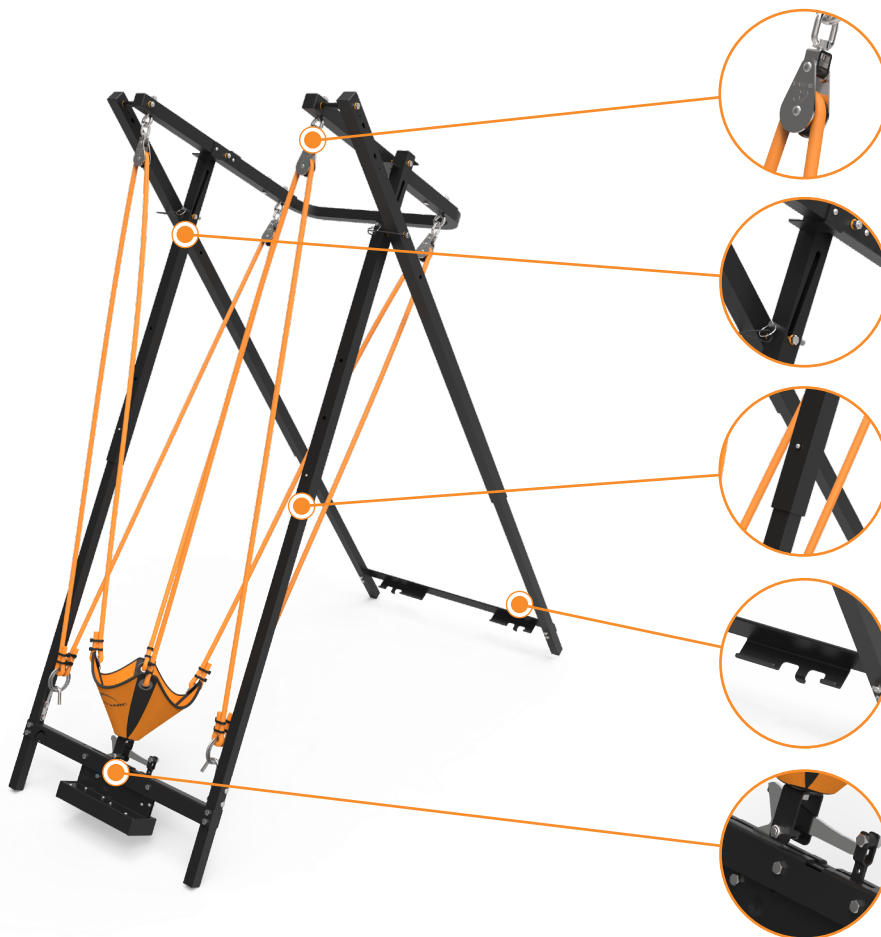

NetZero

Equalized elastic tension increases stability and throw consistency

SlotSlide

Slotted folding frame design eliminates the need for hinges

Nested Frame

Three launchers in one using adjustable telescoping aluminum frame

CrossKeeper

Hassle-free set up and stowing without leg clips

RollerGlyde

Increased trigger reliability using friction minimizing rollers at release points

REMOTE THROWING SYSTEM SPECIFICATION

Patent-Pending Design



GENERAL SPECIFICATIONS

Throw Performance

- Bumper, large – 45 yds.
- Dokken, mallard – 40 yds.
- Duck, mallard – 35 yds.

Material Specifications

- Elastics – Layered latex 7/16" outer diameter – 1/8" thickness
- Frame – Aircraft grade light weight aluminum 1-1/4"
- Pouch – Reinforced nylon with high tensile stitching
- Fasteners / Pulleys – Corrosion resistant stainless steel
- Trigger Arm – High strength stainless steel
- Cross Members/Brace/Trigger Housing – Powder coated galvanized steel

Mass Specifications

- Weight = 28 lbs.

Report Specifications

- [209 primer compatible](#)

Color/Finish Specifications

- Process – Powder coat
- Finish/Color – Textured semi-gloss black

Electrical / Actuator Specifications

- Actuator operating voltage range: 12 – 6 Vdc
- Rated for 100,000 cycles @ max voltage
- Actuator input jack: 3.5mm female TS
- Electronics Cable – 3.5mm audio TS/TRS male to male 6 ft

Remote Release Compatibility

- [Dogtra](#) – one receiver operates two wingers
- [TriTronics](#) – one receiver operates two wingers
- [SportDOG](#) – uses solenoid output, operates one winger

Warranty

- 2-year limited warranty – Trigger mechanism
- 1-year limited warranty – All non-wearable parts
- [Full warranty details online](#)

DIMENSIONAL SPECIFICATIONS

