

QTP-OPTIMAL 2X54...58

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable



Areas of application

- Emergency lighting systems acc. to EN 50172 / DIN VDE 0108-100
- Industry
- Open-plan offices, corridors and storage rooms
- Public buildings
- Sports halls and factories
- Strip lighting
- Suitable for emergency lighting (DC operation)
- Modernization of existing systems
- Suitable for luminaires of protection classes I and II

Product family benefits

- Long lamp life
- No adverse effect from frequent on/off switching
- Automatic restart after lamp replacement
- Perfect lamp start for applications with motion sensors
- VDE/VDE EMC certified system
- Very high energy efficiency due to cut-off technology

Product family features

- Supply voltage: 220...240 V
- Line voltage: 198...264 V
- Line frequency: 0 Hz | 50 Hz | 60 Hz
- Lamp start with optimum filament preheating
- Lifetime: up to 100,000 h (temperature at $T_c = 65$ °C, max. 10 % failure rate)
- Energy Efficiency Index EEI: A2 BAT
- Automatic shutdown of defective lamps and at end of life (EoL T.2)
- Safety: to EN 61347-2-3
- Lamp operation: to EN 60929

Product datasheet

Technical data

Electrical data

Input voltage AC	198...264 V
Nominal voltage	220...240 V
Mains frequency	50...60 Hz
Input voltage DC	176...276 V
Operating frequency	40...50 kHz
Max. ECG no. on circuit breaker 10 A (B)	8 ¹⁾
Max. ECG no. on circuit breaker 16 A (B)	13 ¹⁾
Inrush current	57 A

¹⁾ Type B

Light technical data

Starting time	1.5 s ¹⁾
---------------	---------------------

¹⁾ If there is a temporary interruption in the power supply (< 0.5 s), the lamp will start within 0.3 s

Dimensions & weight



Length	360.0 mm
Width	30.0 mm
Height	21.0 mm
Mounting hole spacing, length	350.0 mm
Product weight	239.90 g

Temperatures & operating conditions

Ambient temperature range	-20...+50 °C
Permitted rel. humidity during operation	5...85 % ¹⁾

¹⁾ Maximum 56 days/year at 85 %

Product datasheet

Lifespan

ECG lifetime	100000 h ¹⁾
---------------------	------------------------

¹⁾ At $T_{case} = 65^{\circ}\text{C}$ at T_{point} / 10% failure rate

Expected Lifetime

Product name	Lamp group				
QTP-OPTIMAL 2X54...58	DULUX L 55 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	65	75
		Lifetime [h]	100000	100000	60000
	HO 54 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	60	65	75
		Lifetime [h]	100000	90000	50000
	L 58 W	ECG ambient temperature [ta]	40	50	60
		Temperature at tc-point [°C]	55	65	75
		Lifetime [h]	100000	100000	60000

Additional product data

Suitable for lamp power (2 lamps)	54...58 W
--	-----------

Capabilities

Suitable for fixtures with prot. class	I / II
End of lamp life safety shutdown	EOL T.2
Max. cable length to lamp/LED module	2.0 m / 1.0 m
Dimmable	No

Certificates & standards


Approval marks – approval	EL / VDE / ENEC 10 / VDE-EMC
EEI – Energy Label	A2 BAT
Standards	Acc. to IEC 61347-2-3 / App. J/Acc. to EN 55015:2006 + A1:2007 + A2:2009/Acc. to EN 61000-3-2/Acc. to EN 61547
Protection class	III
Type of protection	IP20

Logistical data

Commodity code	850410809000
-----------------------	--------------





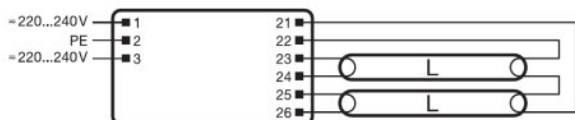





Product datasheet

Wiring Diagram



Wiring diagram

Download Data

File	
	Addon Technical Information 502689_Frequent switching Quicktronic
	Product Datasheet 502688_ECG lifetime - QUICKTRONIC non DIM
	Product Family Datasheet 346489_Familiendatenblatt QTP-Optimal
	Certificates 592319_EAC certificate for Quicktronics QT
	Certificates 349650_QTP-OPTIMAL VDE Certificate
	Certificates 346505_ENEC QTP-Optimal
	Certificates 346506 EMC QTP-Optimal
	Certificates 346512_CE QTP-Optimal
	Declarations of conformity 709431_Declaration of Conformity
	Operating instructions 590771_EAC QTP-OPTIMAL

Product datasheet

Logistical Data

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4008321880253	QTP-OPTIMAL 2X54...58	Shipping carton box 20	385 mm x 160 mm x 100 mm	6.16 dm ³	5016.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

QTP-OPTIMAL 2X54...58

QUICKTRONIC PROFESSIONAL OPTIMAL | ECG for FL and CFL, not dimmable

Product name	Lamp group	Nominal current	Nominal wattage + Power loss	Luminous flux at 35 °C	Number of lighting outlets
QTP-OPTIMAL 2X54...58	DULUX L 55 W	0.48 A	110.00 W	4800 lm	2
	HO 50 W ES	0.46 A	107.00 W	4450 lm	2
	HO 54 W	0.52 A	120.00 W	4450 lm	2
	HO 54 W XT	0.52 A	120.00 W	4450 lm	2
	L 58 W	0.49 A	112.00 W	5000 lm	2
	L 58 W XT	0.49 A	112.00 W	5000 lm	2
	L 58 W XXT	0.49 A	112.00 W	5000 lm	2