


**DC POWER SUPPLIES**

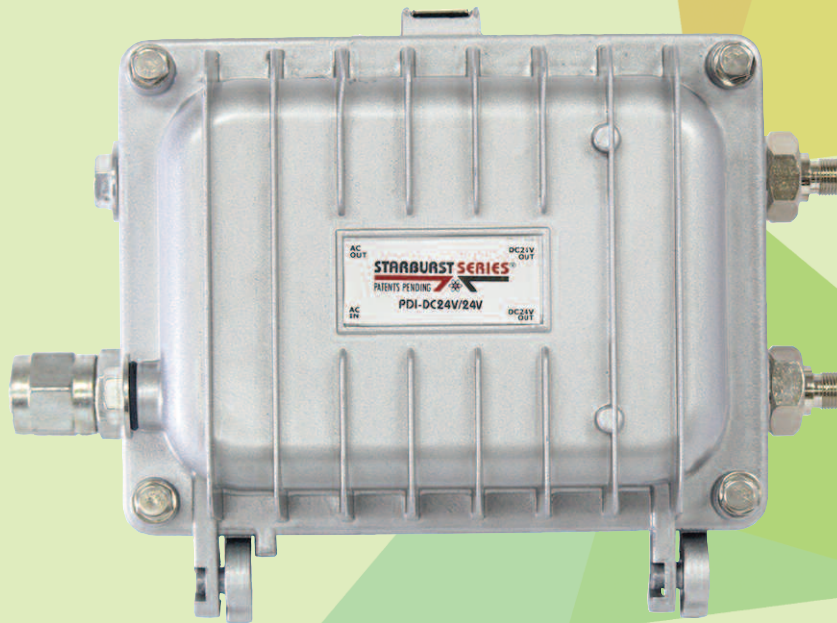

**PART NUMBERS:**

**SBS-DC12V**  
**SBS-DC12/24V**  
**SBS-DC24/24V**

**SPECIFICATIONS:**

	<b>SBS-DC12V</b>	<b>SBS-DC12/24V</b>	<b>SBS-DC24/24V</b>
<b>AC Input</b>	60-90Vac 50-60Hz	60-90Vac 50-60Hz	60-90Vac 50-60Hz
<b>DC Output</b>	DC12V / 2A	DC12V / 2A DC24V / 2.5A	DC24V / 2.5A DC24V / 2.5A
<b>Ripple &amp; Noise</b>	120mVp-p(max)	120mVp-p(12v) 240mVp-p(24v)	240mVp-p(max)
<b>Inrush Current</b>	30A(max)		
<b>Efficiency</b>	87%		
<b>Leakage</b>	0.75mA(max)		
<b>Hold-up Time</b>	10ms@120Vac input		
<b>Operating Temperature</b>	-10 C to +40 C		
<b>Over Current Protection</b>	150% rated current & short protection		
<b>EMI Requirement</b>	FCC part 15 class B or CISPR 22 class B (VDE)		
<b>Insulation</b>	500 Vdc 100M $\Omega$ (min)		
<b>AC In/Out Ports</b>	5/8" - 24 ( Fuse:20A)		
<b>DC Out Ports</b>	F-Type or 5/8" - 24 (Option)		
<b>Dimension</b>	6" x 5.5" x 3.8"		

**COMMENTS/GENERAL APPLICATION:**

Designed to work with CATV/ Networking systems where 60-90Vac is available through coaxial cable. The Starburst® DC power supply converts the Network Cable Standard 60/90Vac source into 12VDC and/or 24VDC for use with equipment requiring DC voltages.

Available with 1 or 2 outputs (12VDC, 12VDC & 24VDC, 24VDC & 24VDC).

**Optional:** Customized output connections are available upon request.