



Electrical Specifications

General Information

Item Number	*2743UP (51522)
Type	Constant Voltage
Output Power	96W (Max.)
Output Voltage	24V DC
Input	Universal (120-277V)

Find (NAED) as cross reference for new item number i.e. *12345

Environmental Specifications

Ambient Operating Temperature	-25 to 40 °C
Max. Case Temperature (Tc)	75°C
Storage Temp.	-25 to 50 °C
Max. Relative Humidity (%)	96% non-condensing
Surge Protection (KV)	ANSI C62.41 Cat A (2.5KV)
Vibration Rating	3G
Overvoltage Protection	Yes
Short Circuit Protection	Yes
Over-temperature Protection	Yes
UL Environmental Rating	Wet
IP Rating	IP64
EMI Compliance	FCC Part 15 Class A

Input

Input Voltage (VAC)	120V-277V (+/- 10%)
Frequency Range (Hz)	50 - 60 Hz (+/- 10%)
Input Current (A)	0.91 @ 120V 0.39 @ 277V
Input Power (W)	111W
THD	< 20%
Power Factor	> 0.95
Inrush Current (Apk)	< 55A
Line Regulation	< 5%
Stand-by Power (W)	< 1.5W


Output

Output Voltage (VDC)	24V (+/- 5%)
Output Current (A)	0.1 - 4.0A
Output Ripple (V)	1V
Efficiency	>85% (Typical)
Load Regulation	<5%




CENTRAL DE LUZ®
ILUMINACIÓN - DOMÓTICA

Wiring Diagram

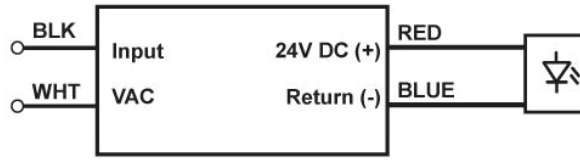


Note: Mounting distance for 18 AWG wire is 15 feet.
For additional information on further distances and EMI compliance reference application note LED126.

Mechanical Diagram

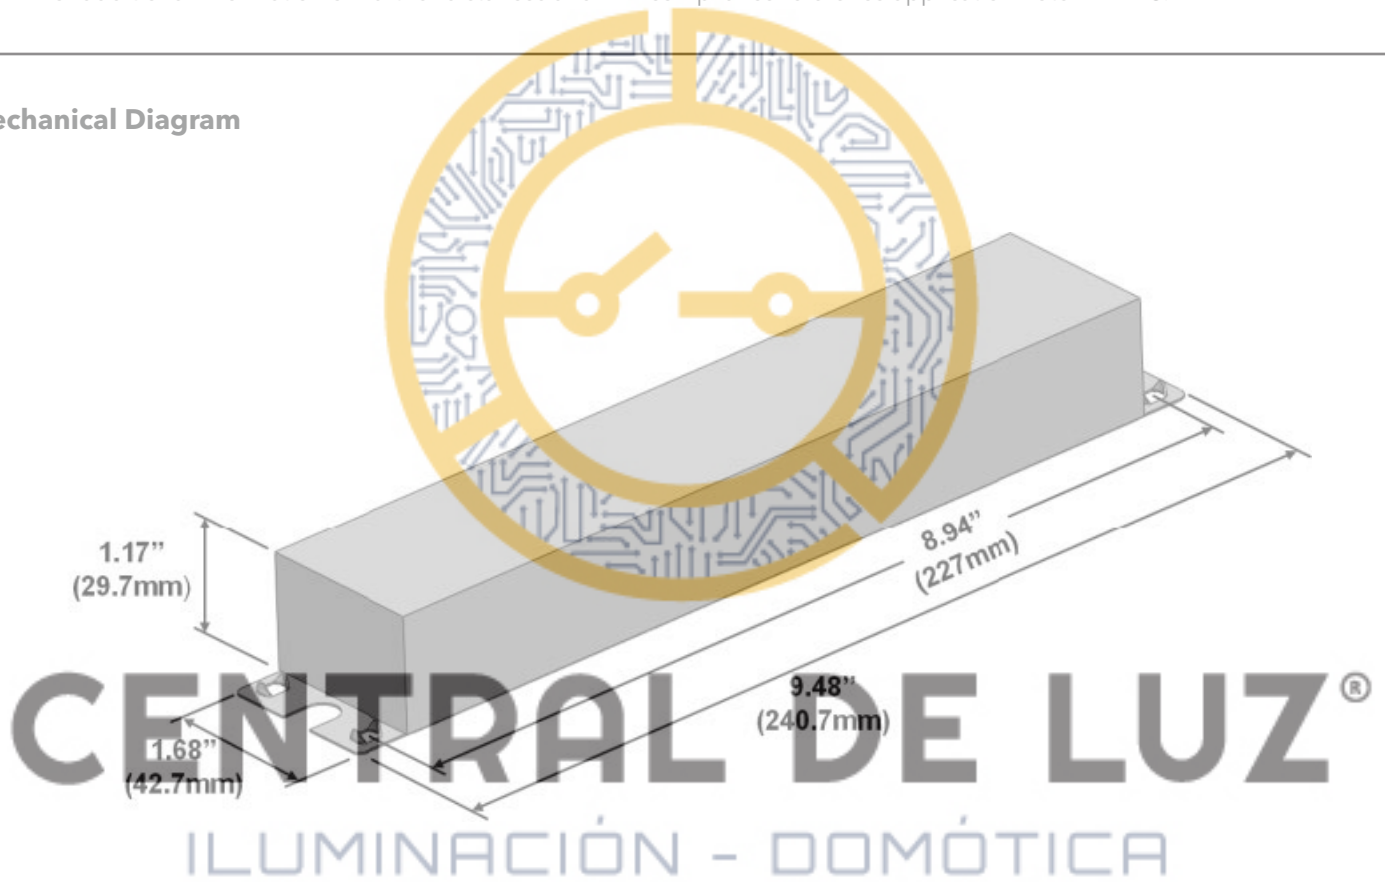


Length	9.48" (240.7mm)
Width	1.68" (42.7mm)
Height	1.17" (29.7mm)
Wiring	Leads Only
Wire Gauge	18AWG
Input Wire	6" (black & White)
Output	6"


Typical Efficiency

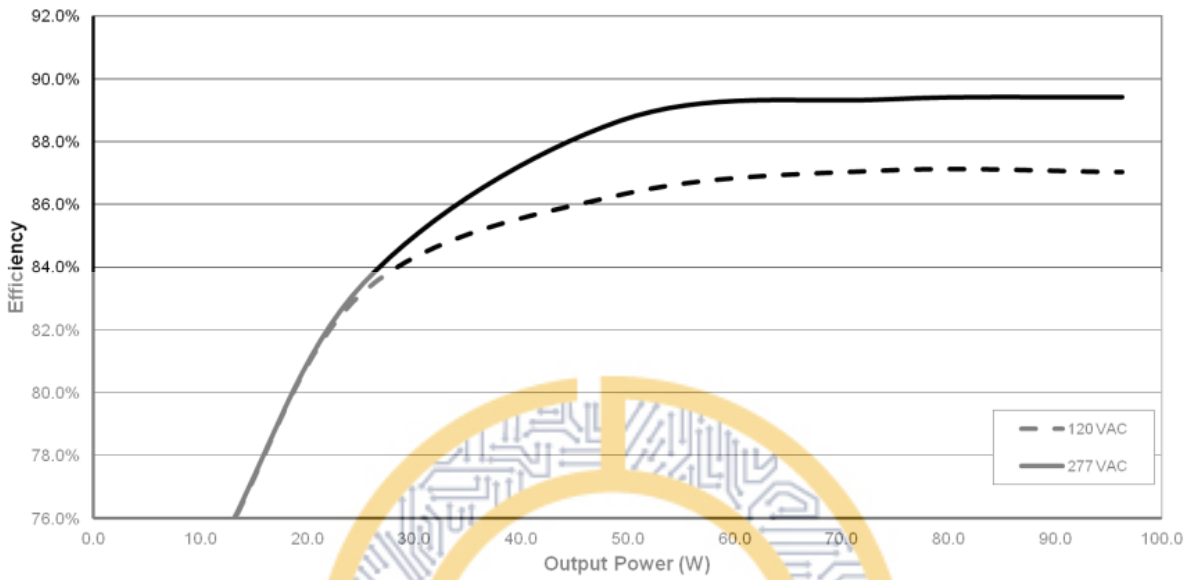

Typical Power Factor

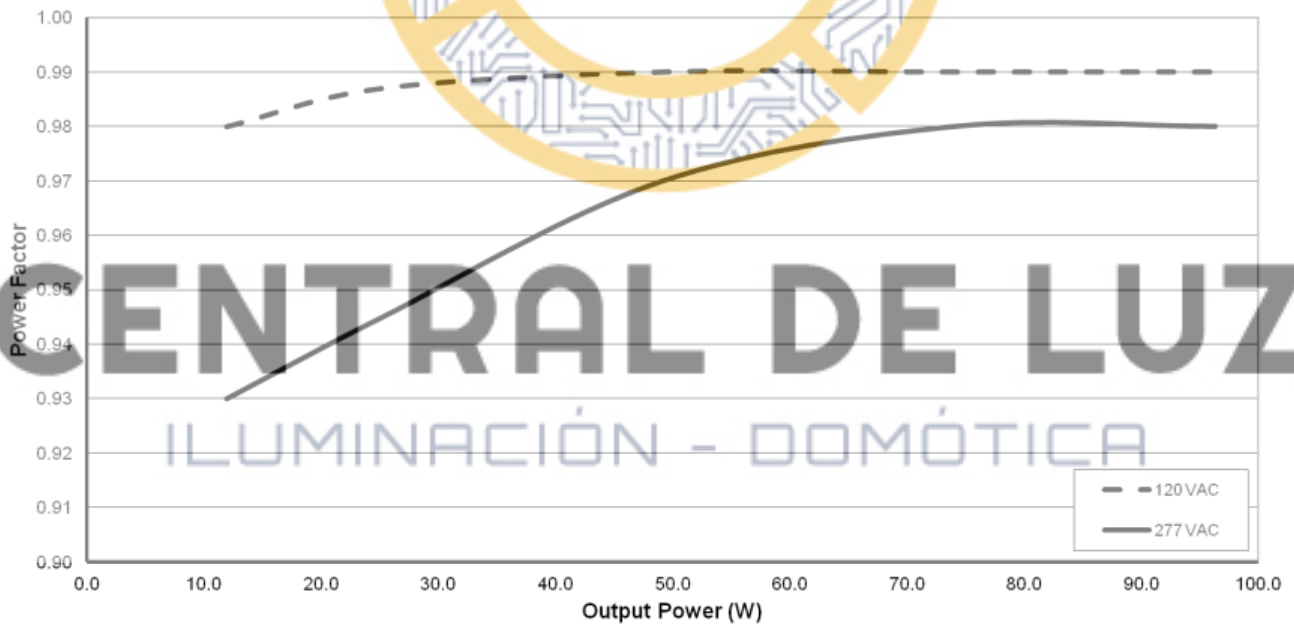

Typical THD

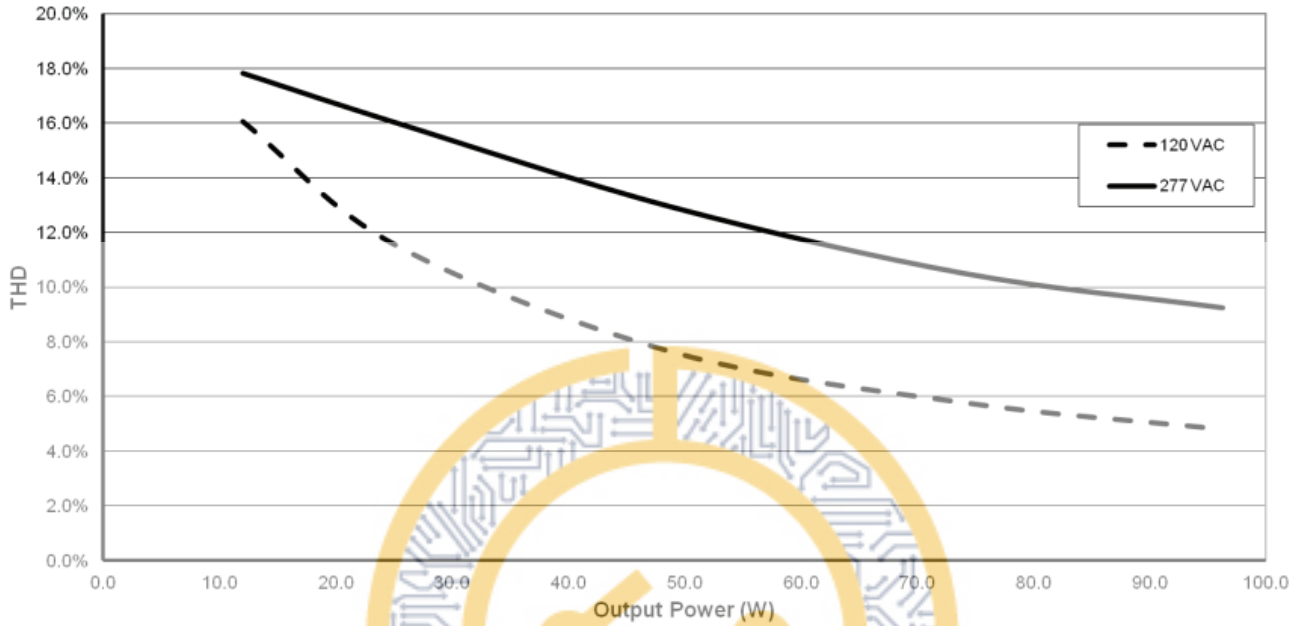

Warranty

eldoLED OPTOTRONIC® Products are covered by a 5-year limited warranty. Complete warranty terms can be found at: www.eldoled.com/legal/terms-and-conditions

CENTRAL DE LUZ®

ILUMINACIÓN - DOMÓTICA

eldoLED
One Lithonia Way
Conyers, GA 30012
United States

+1 877 353 6533

nasupport@eldoLED.com
www.eldoLED.com

51522 02-22

©2021 Acuity Brands Lighting, Inc.
Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application.