



Electrical Specifications

General Information

Item Number	*2743US (51632)
Type	Constant Voltage
Output Power	60W (Max.)
Output Voltage	12V DC
Input	Universal (120-277V)

Find (NAED) as cross reference for new item number i.e. *12345

Environmental Specifications

Ambient Operating Temperature	-25 to 50 °C
Max. Case Temperature (Tc)	80°C
Storage Temp.	-25 to 60 °C
Max. Relative Humidity (%)	96% non-condensing
Surge Protection (KV)	ANSI C62.41 Cat A (2.5KV)
Vibration Rating	3G
Overvoltage Protection	Yes
Short Circuit Protection	Yes
Over-temperature Protection	Yes
UL Environmental Rating	Damp
UL File number	E320395
IP Rating	IP64
EMI Compliance	FCC Part 15 Class A

Input


Input Voltage (VAC)	120V-277V (+/- 10%)
Frequency Range (Hz)	50 - 60 Hz (+/- 10%)
Input Current (A)	0.60 @ 120V 0.26 @ 277V
Input Power (W)	71W
THD	< 20%
Power Factor	> 0.95
Inrush Current (Apk)	< 55A
Line Regulation	< 5%
Stand-by Power (W)	< 1.5W

Output

Output Voltage (VDC)	12V (+/- 5%)
Output Current (A)	0.1 - 5.0A
Output Power (W)	20W (max)
Output Ripple (V)	1V
Efficiency	>85% (Typical)
Load Regulation	<5%




Wiring Diagram

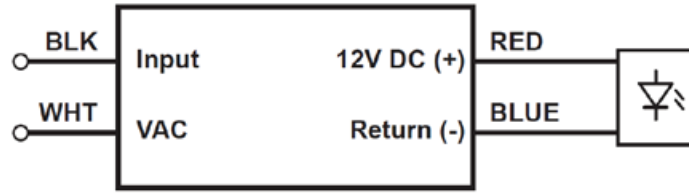


Note: For remote mounting distance limitations and EMI compliance requirements reference application note LED126.

Mechanical Diagram

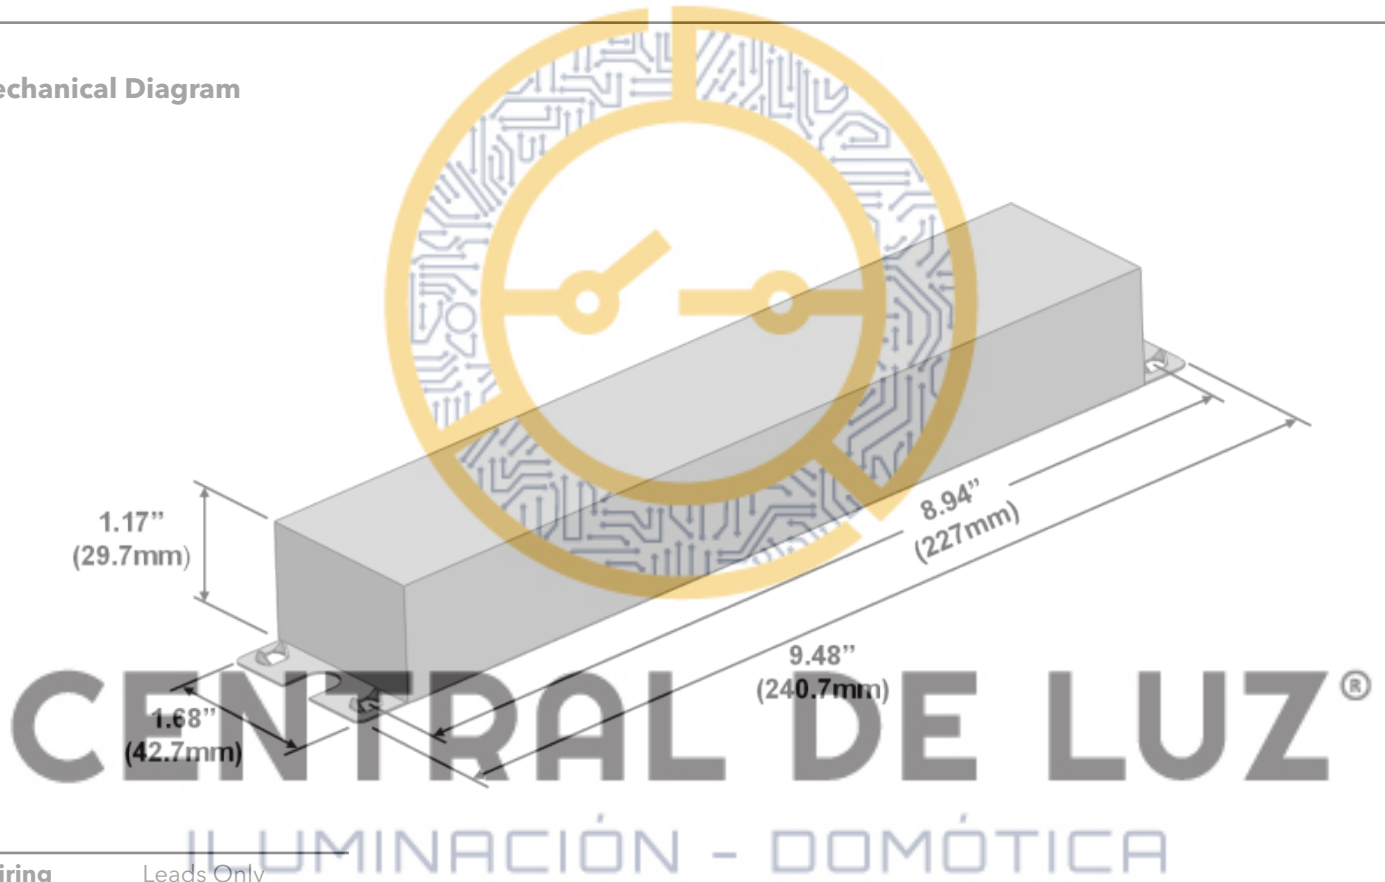


Wiring	Leads Only
Wire Gauge	18AWG
Input Wire	6" (black & White)
Output	6" (red & blue)


Typical Efficiency

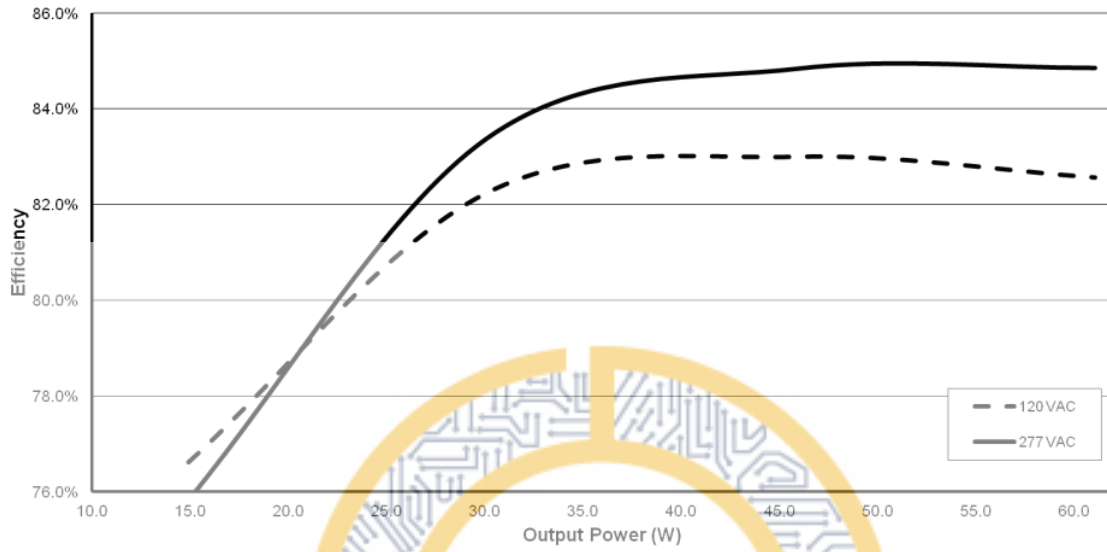

Typical Power Factor

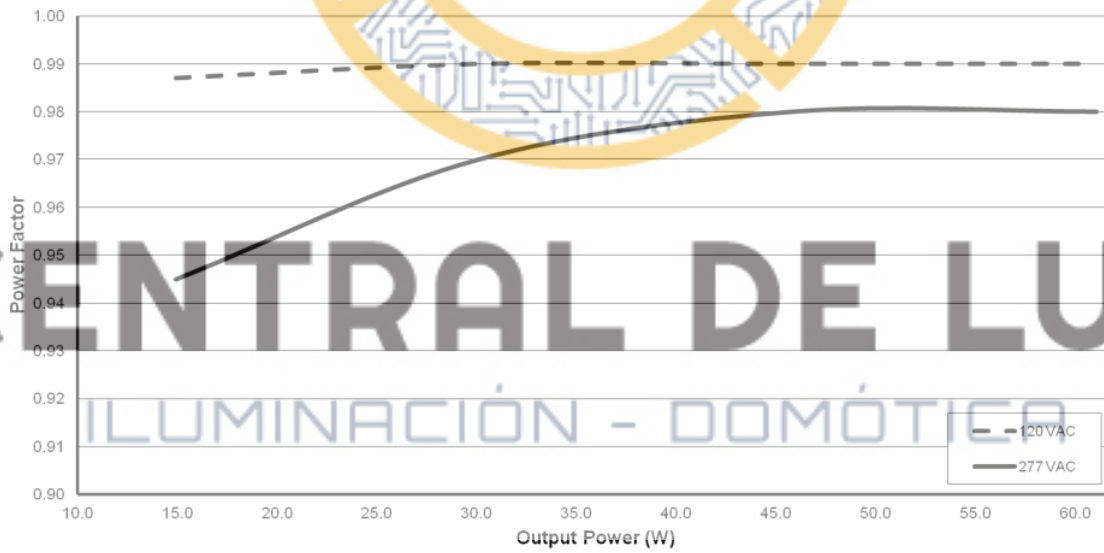

Typical THD

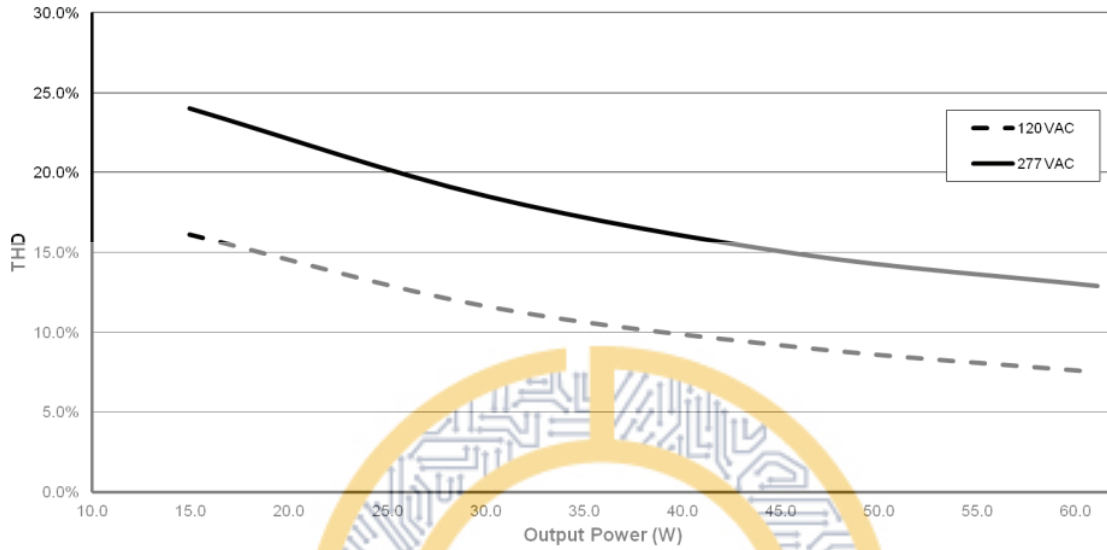

Warranty

eldoLED OPTOTRONIC® Products are covered by a 5-year limited warranty. Complete warranty terms can be found at: www.eldoled.com/legal/terms-and-conditions

CENTRAL DE LUZ®

ILUMINACIÓN - DOMÓTICA

eldoLED
One Lithonia Way
Conyers, GA 30012
United States

+1 877 353 6533

nasupport@eldoLED.com
www.eldoLED.com

51632 11-21

©2021 Acuity Brands Lighting, Inc.
Specifications subject to change without notice. Actual performance may differ as a result of end-user environment and application.