

## KRV Performance Data and Dimensions

MODEL	MOTOR (HP)	FLOW (ACFM)		MAX PRESSURE (PSIG)	LENGTH (IN)	WIDTH (IN)	HEIGHT (IN)	AIR COOLED WEIGHT (LBS)	WATER COOLED WEIGHT (LBS)
		(MAX)	(MIN)						
KRV-25-100	25	117	46	110	72	40	51	2150	1950
KRV-25-125	25	100	44	135	72	40	51	2150	1950
KRV-30-100	30	154	59	110	72	40	51	2220	2020
KRV-30-125	30	127	44	135	72	40	51	2220	2020
KRV-30-150	30	111	43	160	72	40	51	2150	1950
KRV-40-100	40	201	77	110	77	52	53	3050	2850
KRV-40-125	40	183	64	135	77	52	53	3050	2850
KRV-40-150	40	146	52	160	77	52	53	3050	2850
KRV-50-100	50	248	74	110	77	52	53	3130	2930
KRV-50-125	50	222	59	135	77	52	53	3105	2905
KRV-50-150	50	195	59	160	77	52	53	3105	2905
KRV-60-100	60	296	67	110	91	58	68	4400	4300
KRV-60-125	60	283	90	135	91	58	68	4400	4300
KRV-60-150	60	235	68	160	91	58	68	4400	4300
KRV-75-100	75	375	77	110	91	58	68	4600	4500
KRV-75-125	75	350	74	135	91	58	68	4600	4500
KRV-75-150	75	289	71	160	91	58	68	4600	4500
KRV-100-100	100	509	111	110	99	62	72	5000	4850
KRV-100-125	100	464	105	135	99	62	72	5000	4850
KRV-100-150	100	362	113	160	91	58	68	4950	4800
KRV-125-100	125	624	140	110	99	62	72	5300	5150
KRV-125-125	125	592	188	135	99	62	72	5300	5150
KRV-125-150	125	495	144	160	99	62	72	5300	5150
KRV-150-100	150	727	165	110	120	70	81	6100	5850
KRV-150-125	150	718	166	135	120	70	81	6000	5750
KRV-150-150	150	656	221	160	120	70	81	6000	5750
KRV-200-100	200	1030	238	110	120	70	81	7200	6800
KRV-200-125	200	960	228	135	120	70	81	7200	6800
KRV-200-150	200	719	221	160	120	70	81	5625	5425
KRV-250-100	250	1248	301	110	142	76	86	9000	6800
KRV-250-125	250	1171	290	135	142	76	86	9000	8600
KRV-250-150	250	1010	316	160	120	70	81	7600	7200
KRV-300-100	300	1542	379	110	142	76	86	9200	8800
KRV-300-125	300	1269	321	135	142	76	86	9200	8800
KRV-300-150	300	1231	394	160	142	76	86	9100	8700
KRV-350-100	350	1604	480	110	154	86	90	9600	9200
KRV-350-125	350	1477	463	135	154	86	90	9600	9200
KRV-350-150	350	1447	337	160	154	86	90	9500	9100



NOTE: Models designed for operation at 175 and 200 psi available. Consult factory representative for details.




[rogers-machinery.com](http://rogers-machinery.com)

Air delivery in accordance with ISO-9300 and ISO-1217. All data subject to change without notice.  
Allow at least 36 inches (92 cm) service clearance around assembly and 42 inches (107 cm) of clearance in front of electrical panels.

## KR Performance Data and Dimensions

MODEL	MOTOR HP	FLOW * ACFM @ PRESSURE			NOMINAL MOTOR RPM	L IN.	W IN.	H IN.	AIR COOLED	WATER COOLED
		100 PSI	125 PSI	150 PSI					NET WEIGHT LBS.	NET WEIGHT LBS.
KR-25	25	117	**115	--	3600	72	40	51	2000	1900
KR-30	30	154	113	111	3600	72	40	51	2070	1970
KR-40	40	201	170	146	3600	77	52	53	3055	2855
KR-50	50	248	242	195	3600	77	52	53	3080	2880
KR-60	60	296	292	235	3600	91	58	68	4025	3825
KR-75	75	364	353	286	1800	91	58	68	5000	4800
KR-100	100	519	436	425	1800	99	62	72	6000	5800
KR-125	125	629	508	498	1800	120	70	81	6200	6000
KR-150	150	784	711	610	1800	120	70	81	6500	6300
KR-200	200	1033	935	758	1800	120	70	81	7200	7000
KR-250	250	1231	1160	1012	1800	140	83	87	8700	8400
KR-300	300	1453	--	1206	1800	140	83	87	9000	8700
KR-350	350	--	--	1402	1800	145	83	88	9500	9100

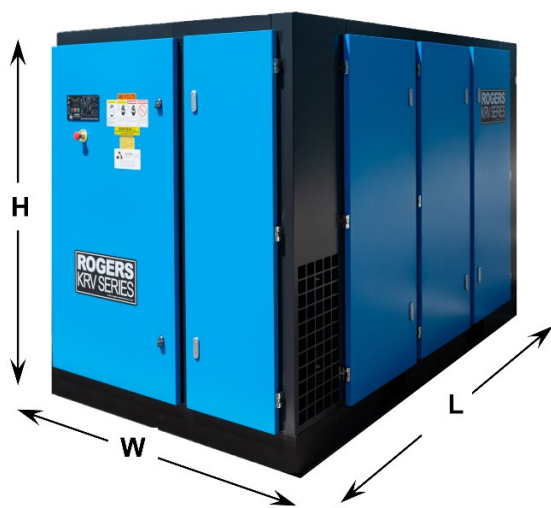

**KR AND KRV PACKAGES**

- \* All units are capable of operating at their full capacity to 10 psi over the rated pressure.
- \*\* 115 psi operation to 125 psi maximum at full capacity.
- NOTE: RPM, dimensions and weights are specific to 100 and 125 psi models. Consult factory representative to verify information for 150 psi models.
- NOTE: Models designed for operation at 175 and 200 psi available. Consult factory for details..

[rogers-machinery.com](http://rogers-machinery.com)



*Serving the United States and International Markets with  
Compressed Air, Blower, Pump and Vacuum Solutions  
Since 1949*

Air delivery in accordance with ISO-9300 and ISO-1217. All data subject to change without notice.  
Allow at least 36 inches (92 cm) service clearance around assembly and 42 inches (107 cm) of clearance in front of electrical panels.