


# ROGERS®

Rotary Screw Air Compressors

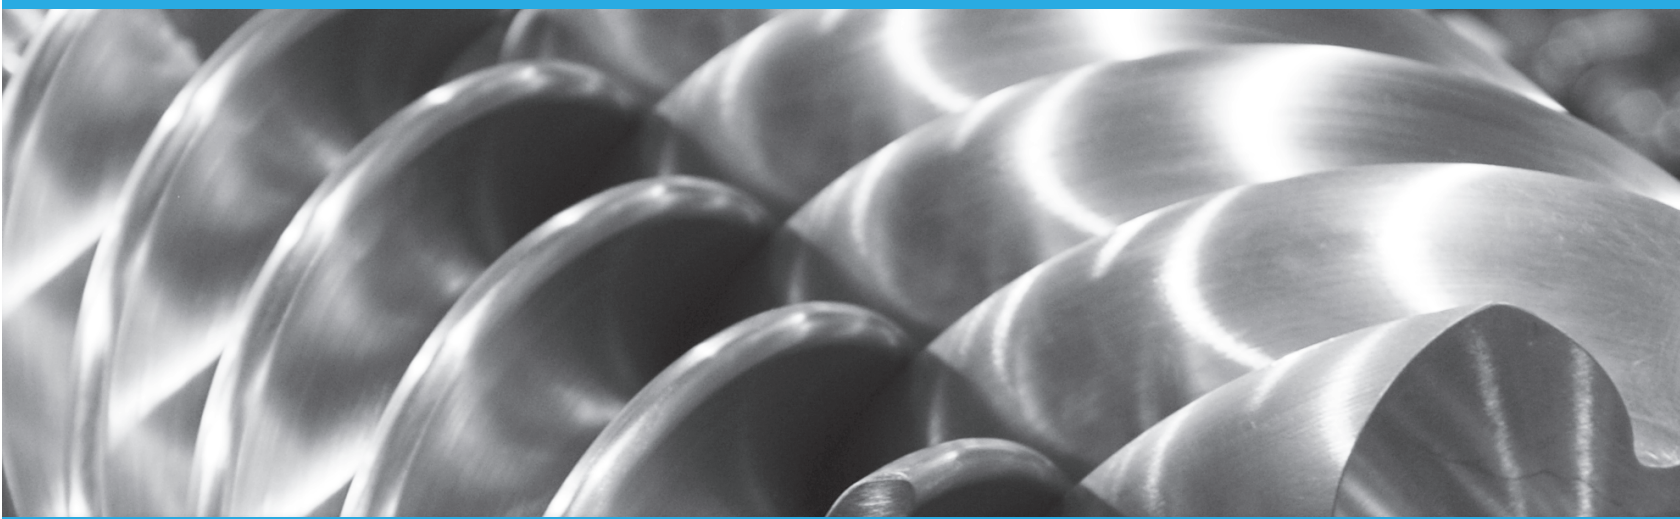

## KI / KIV Series

### Tank Mounted Packages

- Fixed Speed or Variable Speed
- Lubricant-Injected
- Single-stage
- 10 - 30 HP
- Air-Cooled
- 100 - 175 PSIG



Tank Mounted



Tank Mounted with Dryer

# ROGERS® KI/KIV Series

## Tank Mounted Package Components

### Easy Installation

The compact size of the integrated tank and dryer reduces floor space requirements and the preinstalled piping saves on installation costs.

### Stainless Hard Piping

Stainless piping eliminates the need to replace hoses and gives you a the longest lasting installation possible.

### Tank

120 gallon, 200 psi rated tank with drain, pressure gage and pressure relief valve.



### Dryer

Mounted, refrigerated dryer to reduce water in the compressed air system. KIV-20 through 30 are provided with a cycling dryer to provide maximum energy efficiency paired with the variable speed compressor drive.

### Filter (not shown)

Integrated, high efficiency, Parker Finite coalescing filter removes residual compressor oil before reaching the dryer and downstream components.

## Performance and Dimensions

Model	Capacity (CFM) @ 100 PSIG	Tank Mounted		Tank Mounted with Dryer	
		Weight (lbs)	Dimensions L x W x H (inches)	Weight (lbs)	Dimensions L x W x H (inches)
KI-10	35	1300	70 x 36 x 75	1432	82 x 36 x 75
KI-15	54	1750	70 x 40 x 82	2029	82 x 40 x 82
KI-20	82	1750	70 x 40 x 82	2029	82 x 40 x 82
KI-25	108	2150	70 x 40 x 85	2485	82 x 40 x 85
KI-30	124	2150	70 x 40 x 85	2485	82 x 40 x 85
KIV-10	33	1350	70 x 36 x 75	1570	82 x 36 x 75
KIV-15	48	1800	70 x 40 x 85	2097	82 x 40 x 85
KIV-20	76	1800	70 x 40 x 85	2097	82 x 40 x 85
KIV-25	98	2200	70 x 40 x 88	2602	82 x 40 x 88
KIV-30	105	2200	70 x 40 x 88	2602	82 x 40 x 88

