




AODD PUMPS FOR YOUR MOST SEVERE APPLICATIONS

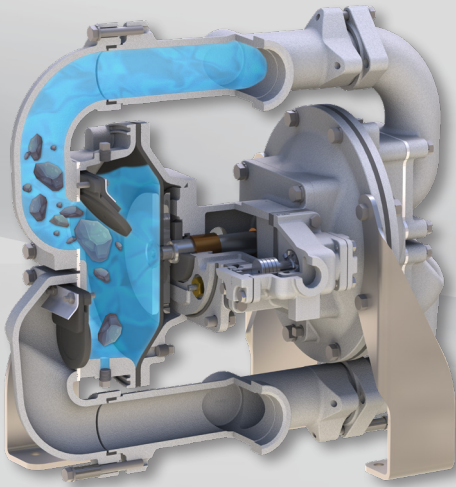

**HEAVY DUTY
FLAP VALVE PUMP**

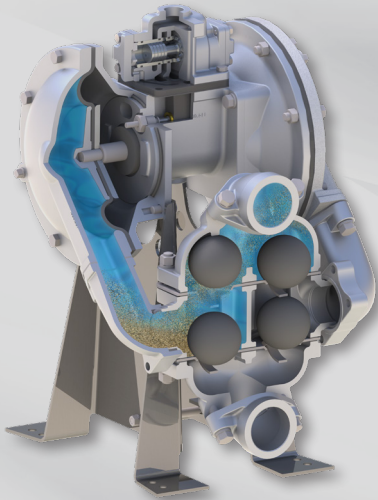

**HEAVY DUTY
BALL VALVE PUMP**

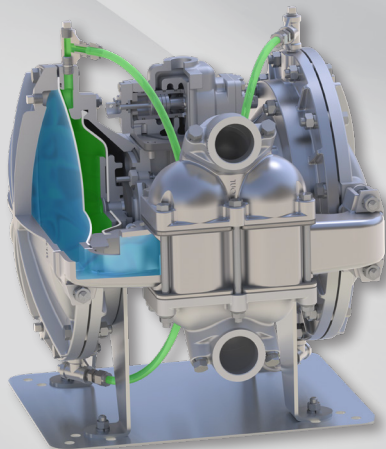

**CONTAINMENT DUTY
BALL VALVE PUMP**



OUR SIGNATURE
ENSURES YOUR
SUCCESS

SANDPIPER Signature Series™ AODD pumps are engineered to deliver industry leading durability and performance, even for your most severe applications and environments.





**ROBUST DIAPHRAGM
CONNECTING ROD**

Guaranteed not to yield under tension, compression, or bending



**5 YEAR LIMITED
PRODUCT WARRANTY**


5 Year Guarantee for defects in material or workmanship

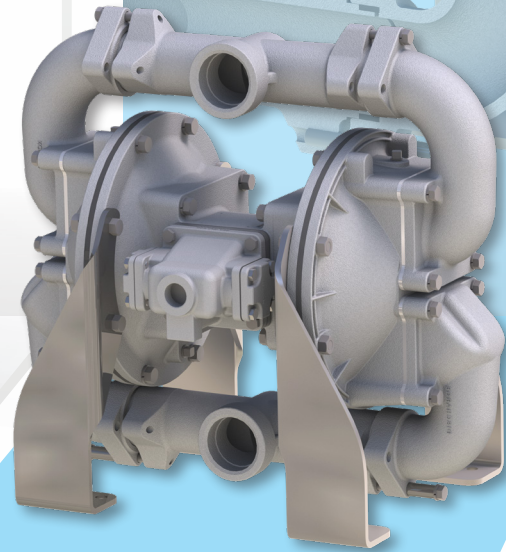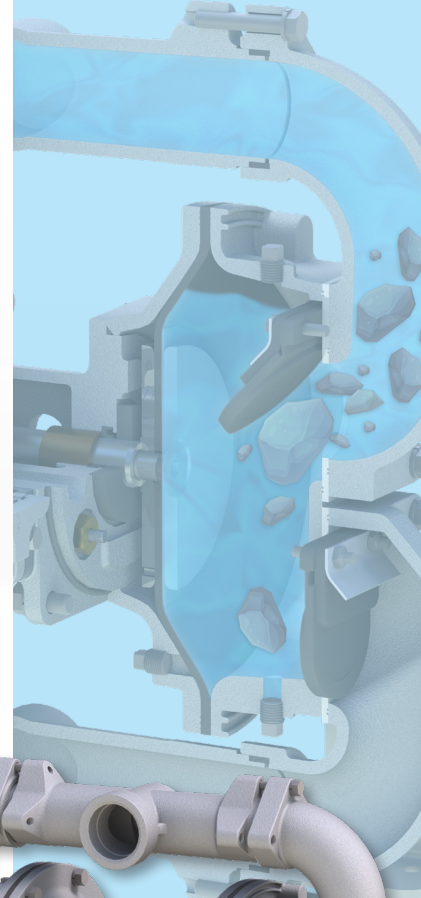

**Heavy Duty
Flap Valve**


For fluids containing up to line size solids.

LEARN

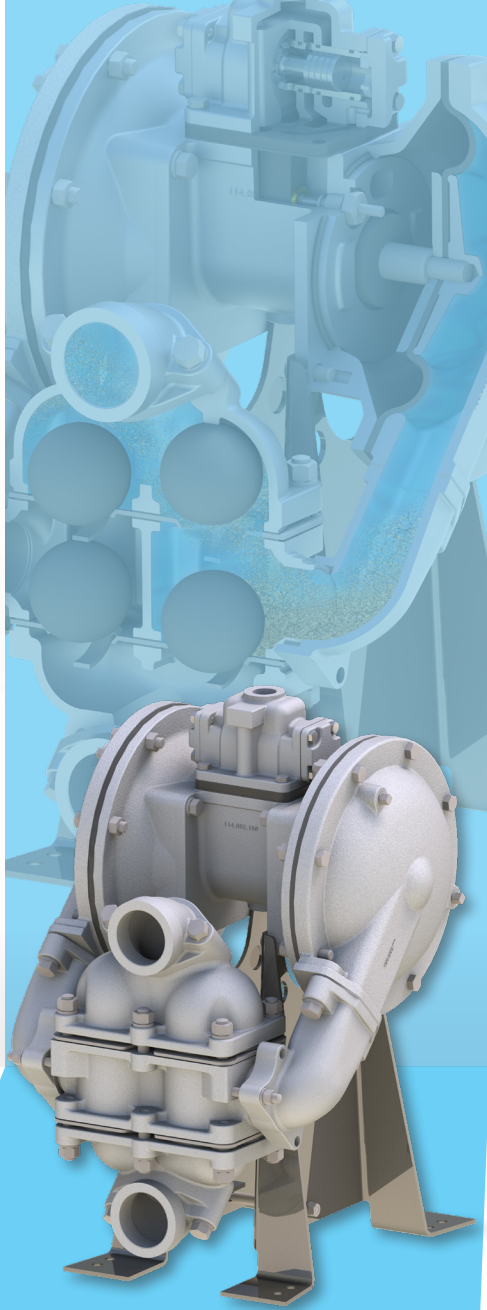

Heavy Duty Ball Valve

For fluids containing settling,
suspended & floating solids.

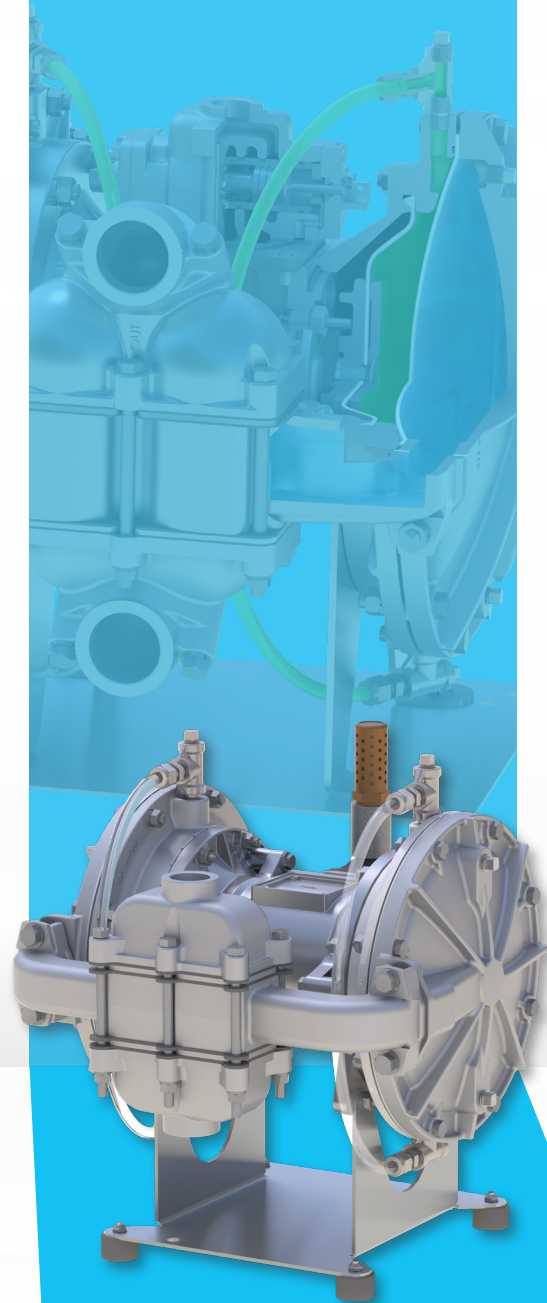

Containment Duty Ball Valve

The only complete line of AODD
pumps featuring superior fluid
containment; protecting your
people, environment and pump.

MORE AT: [SANDPIPERPUMP.COM/SIGNATURE-SERIES](https://sandpiperpump.com/signature-series)

HEAVY DUTY FLAP VALVE PUMP

FOR FLUIDS CONTAINING UP TO LINE SIZE SOLIDS

TECH SPECS:

SIZES: 1 - 4" (25 - 102 mm) **FLOW:** 70 - 310 GPM (265 - 1173 LPM)

SOLIDS HANDLING: 1 - 3" (25 - 76 mm) **DISPLACEMENT:** .1 - 1.6 gallons (.38 - 6.06 liters)

CONSTRUCTION: Aluminum, Cast Iron, Stainless Steel, Polypropylene

ELASTOMERS: (Diaphragms & Flaps) Nitrile, Neoprene, Hytrel®, Santoprene®, Fluorocarbon, EPDM, Urethane

PUMPS UP TO LINE SIZE SOLIDS

Flap Valve construction has a larger flow area than Ball Valve pumps and allows up to line size solids to pass directly through the pump.

BOTTOM DISCHARGE PORTING

Allows settling solids to pass through the pump and not settle inside the pumping chamber, preventing damage and premature wear.

SUPERIOR SUCTION LIFT

Dry prime suction lift up to 24 feet, in water; which is 5% greater than typical Ball Valve pumps.

EASIEST AODD PUMP TO MAINTAIN

Quick access to serviceable components to help increase productivity and reduce downtime.

Santoprene® is a registered tradename of Exxon Mobil Corp. Hytrel® is a registered trademark of E.I. du Pont de Nemours and Company.



Diaphragm Wear Pads

Extend diaphragm life by reducing the frictional stresses associated with the outer diaphragm plate



Thick Manifold and Chamber Walls

Greater wear resistance when pumping solids and solid laden slurries, providing extended service life



ESADS+Plus Air Distribution System

Allows for quick and easy access to the main air valve components without removing it from service




All Bolted Construction

Ensures sealing forces are applied evenly across the pump for leak-free operation



**OUR SIGNATURE
ENSURES YOUR SUCCESS**
Industry leading durability and performance
for your most severe applications

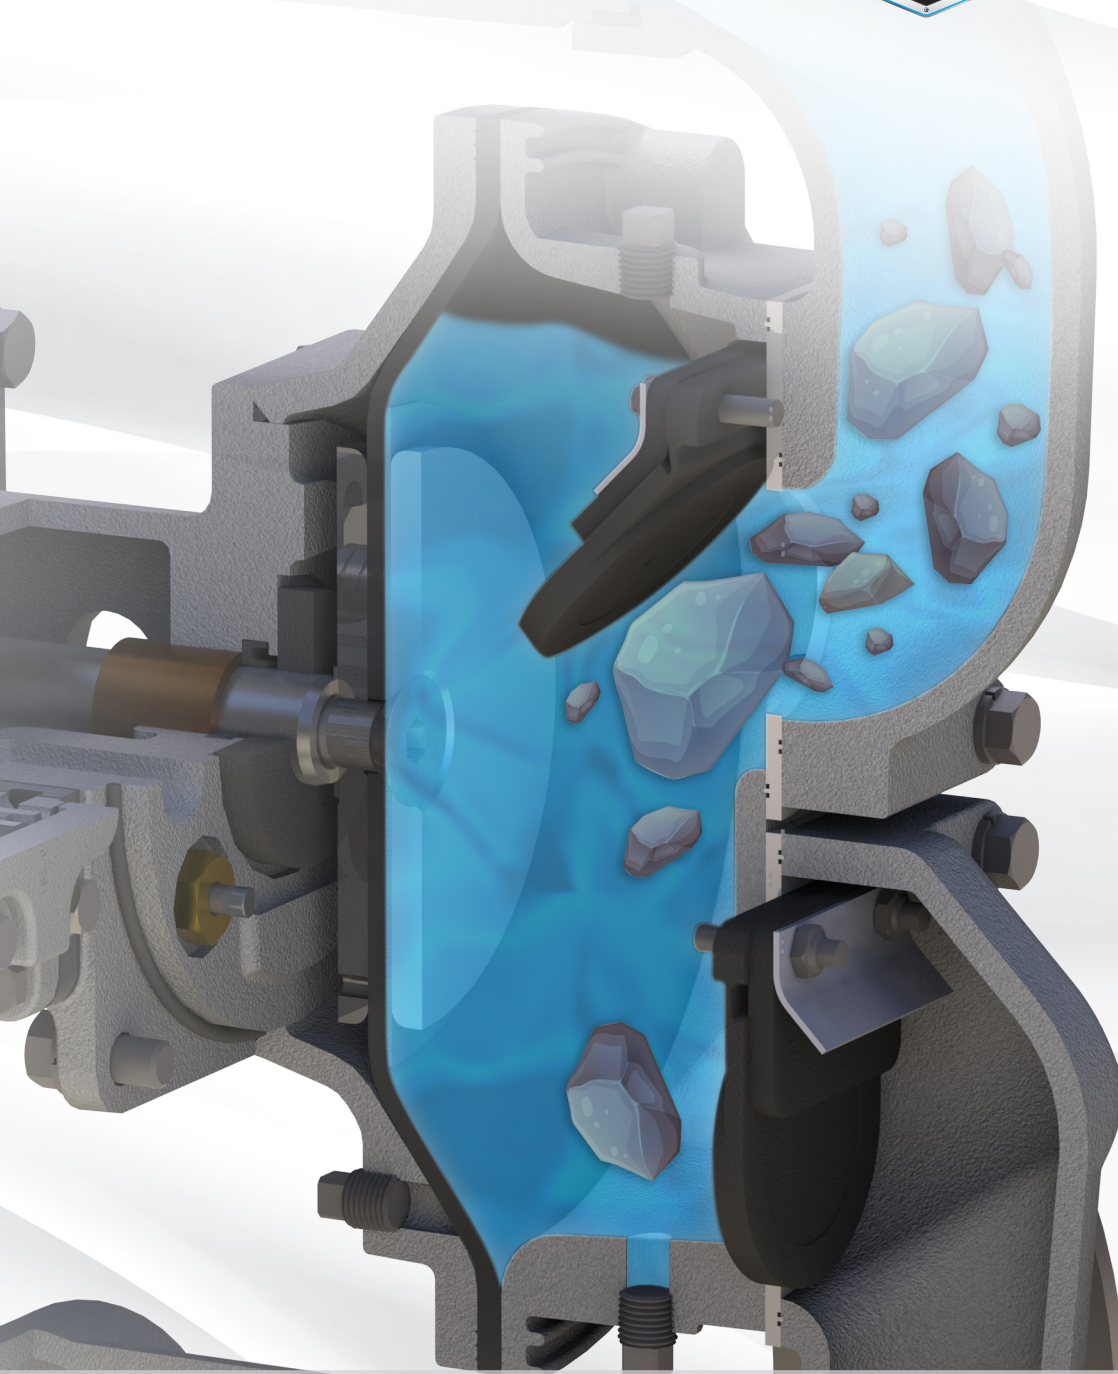

APPLICATIONS			
FLUID CHARACTERISTICS	Water	✓	
	Suspended Solids	✓	
	Non-Suspended Solids	✓	
	Line Size Solids	✓	
	Sludge/Slurry	✓	
	High Viscosity (Flowable Fluids)	✓	
	Erosion/Abrasive Fluids	High	✓
		Mod.	✓
		Low	✓
	Corrosion	✓	
INSTALLATION	Permanent	✓	
	Portable	✓	
	Containment/Prevention	!	
	Flooded Suction	✓	
	Suction Lift	✓	
	Submerged	✓	
DUTY	Intermittent/On-Demand	✓	
	Continuous	✓	

✓ = Best ✓ = Suited ! = Limitations
 ⚠ = Use listed pump



Robust Diaphragm Connecting Rod
Guaranteed not to bend or break; assures reliable and consistent diaphragm operation



Heavy Duty Actuator Plungers
Ensures reliable pilot valve operation



Cross-Drilled Directional Spool Valve
Guarantees the pump will not stall and ensures on / off reliability



Stainless Steel Check Valve Seats
Provide long-lasting abrasion resistance and solids handling durability

HEAVY DUTY BALL VALVE PU

FOR FLUIDS CONTAINING SETTLING, SUSPENDED & FLOATING SOLIDS

TECH SPECS:

SIZES: 1 - 4" (25 - 102 mm) **FLOW:** 42 - 300 GPM (159 - 1136 LPM)

SOLIDS HANDLING: .25 - .875" (6 - 22 mm) **DISPLACEMENT:** .9 - 2.0 gallons (.34 - 7.6 liters)

CONSTRUCTION: Aluminum, Cast Iron, Stainless Steel, Alloy C

ELASTOMERS: (Diaphragms, Check Balls, Seats) Nitrile, Neoprene, Santoprene®, PTFE, Fluorocarbon, Hytrel®, EPDM

DOWN PORTED OPTION

For fluids containing settling solids. Solids collect in the elbow instead of the diaphragm chamber and are discharged, limiting wear on the diaphragm and components.

TOP PORTED OPTION

For fluids containing floating solids, suspended solids, or entrained gases. Discharge port is on top of the pump for easier evacuation and less build-up of solid material or gases.

SIDE PORTED OPTION (1" & 1-1/2" ONLY)

For use in confined spaces. The ports are positioned with the center of the pump, allowing for installation in small or confined spaces.

WEIGHTED CHECK VALVE BALLS

Feature a metallic core that is 30-60% heavier than a solid rubber check ball, helping to improve performance with viscous fluids.



Diaphragm Wear Pads

Extend diaphragm life by reducing the frictional stresses associated with the outer diaphragm plate



Thick Manifold and Chamber Walls

Greater wear resistance when pumping solids and solid laden slurries, providing extended service life



ESADS+Plus Air Distribution System

Allows for quick and easy access to the main air valve components without removing it from service




All Bolted Construction

Ensures sealing forces are applied evenly across the pump for leak-free operation



OUR SIGNATURE ENSURES YOUR SUCCESS

Industry leading durability and performance for your most severe applications

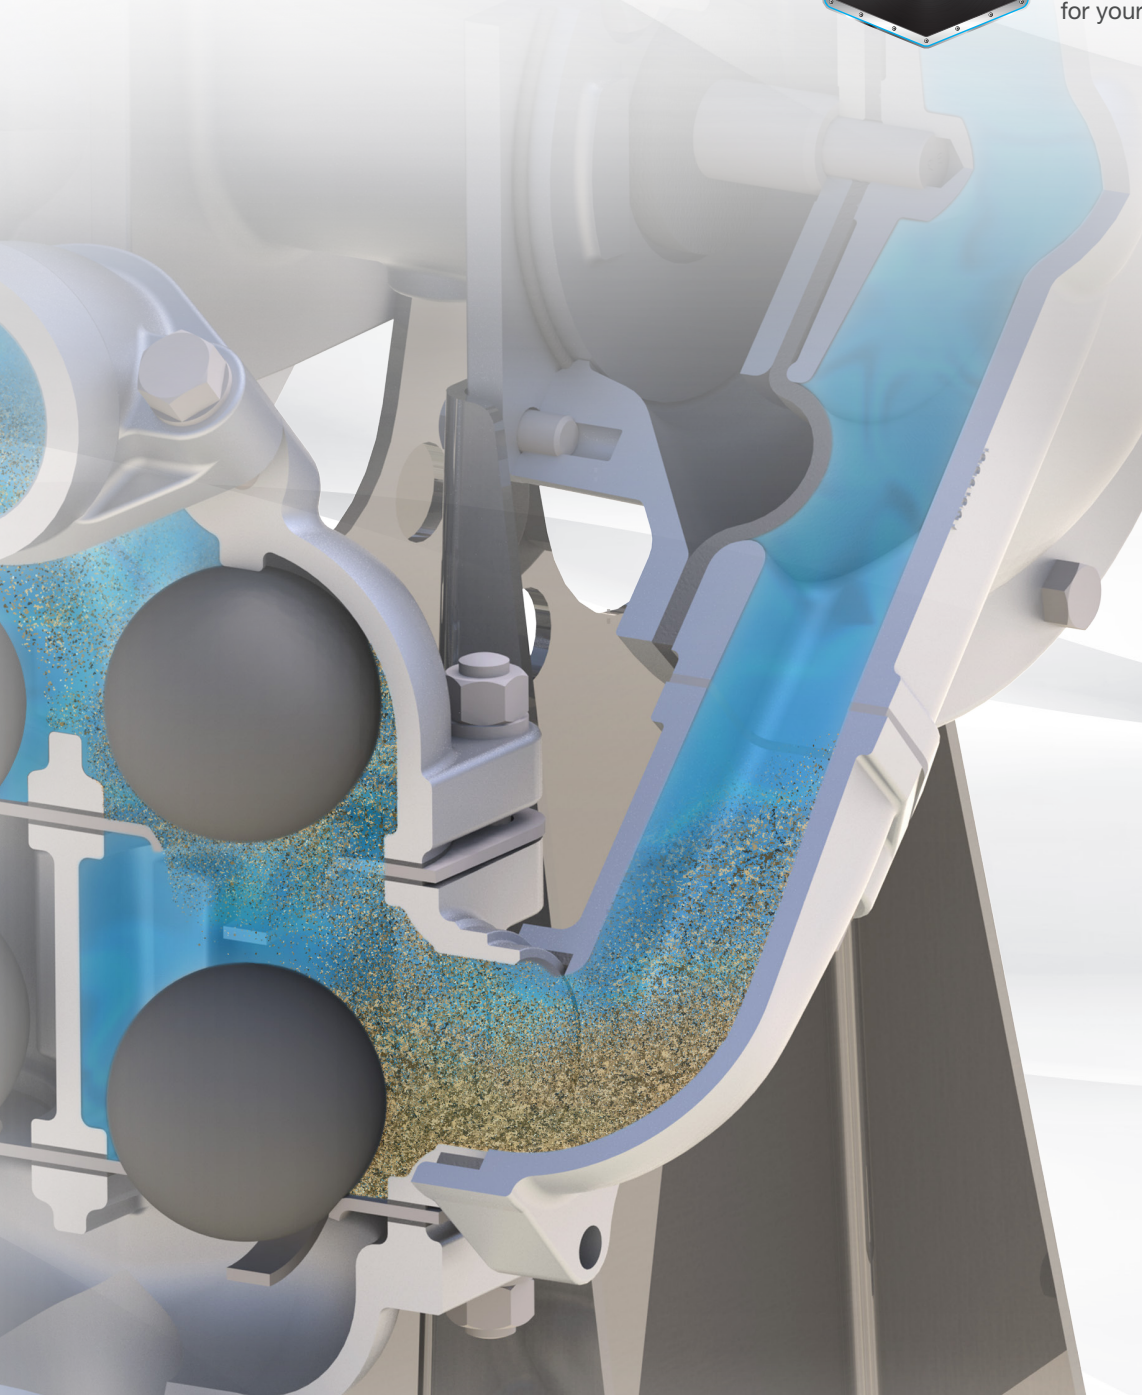

APPLICATIONS			
FLUID CHARACTERISTICS	Water	✓	
	Suspended Solids	✓	
	Non-Suspended Solids	✓	
	Line Size Solids	⚠ HD FLAP	
	Sludge/Slurry	✓	
	High Viscosity (Flowable Fluids)	✓	
	Erosion/Abrasive Fluids	High	✓
		Mod.	✓
		Low	✓
	Corrosion	✓	
INSTALLATION	Permanent	✓	
	Portable	✓	
	Containment/Prevention	!	
	Flooded Suction	✓	
	Suction Lift	✓	
	Submerged	✓	
DUTY	Intermittent/On-Demand	✓	
	Continuous	✓	

✓ = Best ✓ = Suited != Limitations
 ⚠ = Use listed pump



Robust Diaphragm Connecting Rod
 Guaranteed not to bend or break; assures reliable and consistent diaphragm operation



Heavy Duty Actuator Plungers
 Ensures reliable pilot valve operation



Cross-Drilled Directional Spool Valve
 Guarantees the pump will not stall and ensures on / off reliability



Large Flow Area
 Reduces fluid velocity through pump, which often lessens wear

CONTAINMENT DUTY BALL V

THE ONLY COMPLETE LINE OF AODD PUMPS FEATURING SUPERIOR FLUID CONTAINMENT; PROTECTING YOUR PEOPLE

TECH SPECS:

SIZES: 1 - 3" (25 - 76 mm) **FLOW:** 42 - 238 GPM (159 - 901 LPM)

SOLIDS HANDLING: .25 - .71" (6 - 18 mm) **DISPLACEMENT:** .09 - .9 gallon (.34 - 3.4 liters)

CONSTRUCTION: Aluminum, Cast Iron, Polypropylene, PVDF

ELASTOMERS: (Diaphragms, Check Valves, Seats) PTFE, Neoprene, Fluorocarbon, Santoprene®

NO LOST SYSTEM FLUID

Perfect for pumping fluids that are dangerous to your people or the environment. Makes repairs easy, as the Air Side of the pump does not get contaminated.

NO COSTLY CLEANUP

When a typical AODD pump has a diaphragm breach, the system fluid passes through the Air Side of the pump and out into the environment. Clean-up is expensive and time consuming.

2 DIAPHRAGMS ARE BETTER THAN 1

Features two diaphragms. The space between the diaphragms creates a barrier between the Air Side and Wet Side of the pump, preventing escape of the fluid to the environment when the pumping diaphragm becomes breached.

VISUAL LEAK DETECTION

Alerts the user when there is a diaphragm breach before any of the system fluid can escape to the environment. Also available with electronic and mechanical leak detectors.



Pumping Diaphragm

Stays in contact with the fluid and moves it through the system



Driver Diaphragm

Stays in contact with the Air Side of the pump and is hydraulically locked to the Pumping Diaphragm



Containment Chamber

Area between the two diaphragms, creating a barrier between the Air Side and Wet Side



ESADS+Plus Air Distribution System

Allows for quick and easy access to the main air valve components without removing it from service


ALVE PUMPS

PLE, ENVIRONMENT & PUMP



OUR SIGNATURE ENSURES YOUR SUCCESS

Industry leading durability and performance for your most severe applications

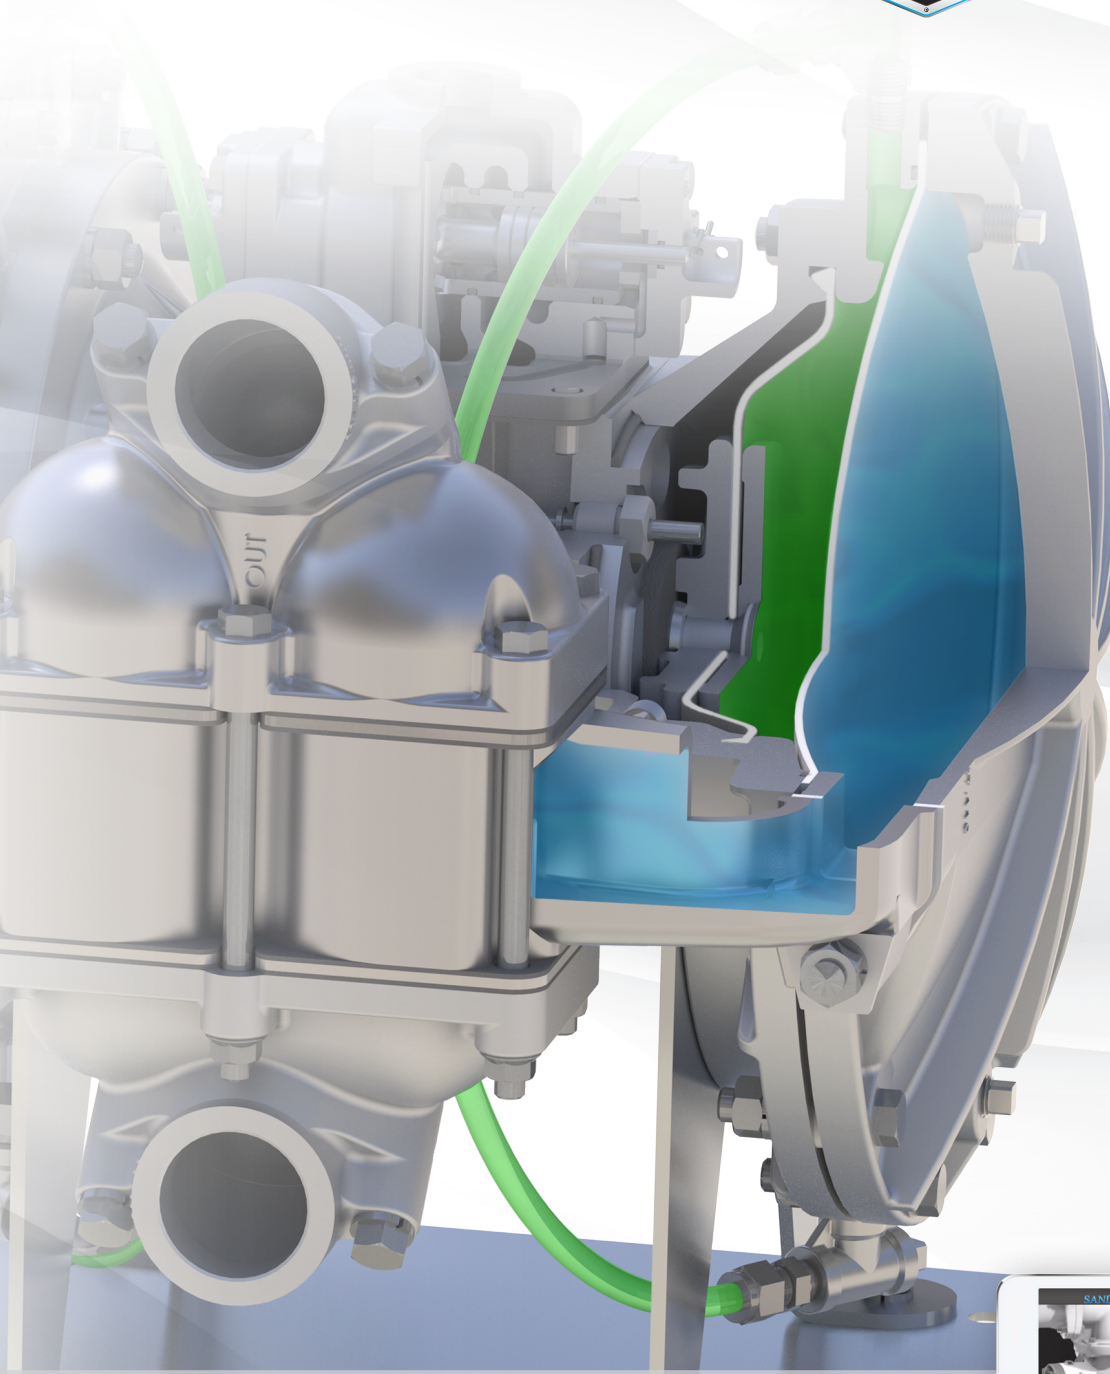

APPLICATIONS			
FLUID CHARACTERISTICS	Water	✓	
	Suspended Solids	✓	
	Non-Suspended Solids	⚠ NOT RECOMMENDED	
	Line Size Solids	⚠ NOT RECOMMENDED	
	Sludge/Slurry	!	
	High Viscosity (Flowable Fluids)	✓	
	Erosion/Abrasive Fluids	High	!
		Mod.	!
		Low	✓
	Corrosion	✓	
INSTALLATION	Permanent	✓	
	Portable	✓	
	Containment/Prevention	✓	
	Flooded Suction	✓	
	Suction Lift	✓	
	Submerged	!	
DUTY	Intermittent/On-Demand	✓	
	Continuous	✓	

CDBALL

✓ = Best ✓ = Suited ! = Limitations
 ⚠ = Use listed pump



WATCH THE VIDEO TO LEARN MORE:
SANDPIPERPUMP.COM/CONTAINMENT




Robust Diaphragm Connecting Rod
 Guaranteed not to bend or break; assures reliable and consistent diaphragm operation



Cross-Drilled Directional Spool Valve
 Guarantees the pump will not stall and ensures on / off reliability

ARE YOU USING THE CORRE

SANDPIPER SIGNATURE SERIES™ - THE ONLY AODD PUMPS DESIGNED TO OPERATE UNDER THE MOST SEVERE CO

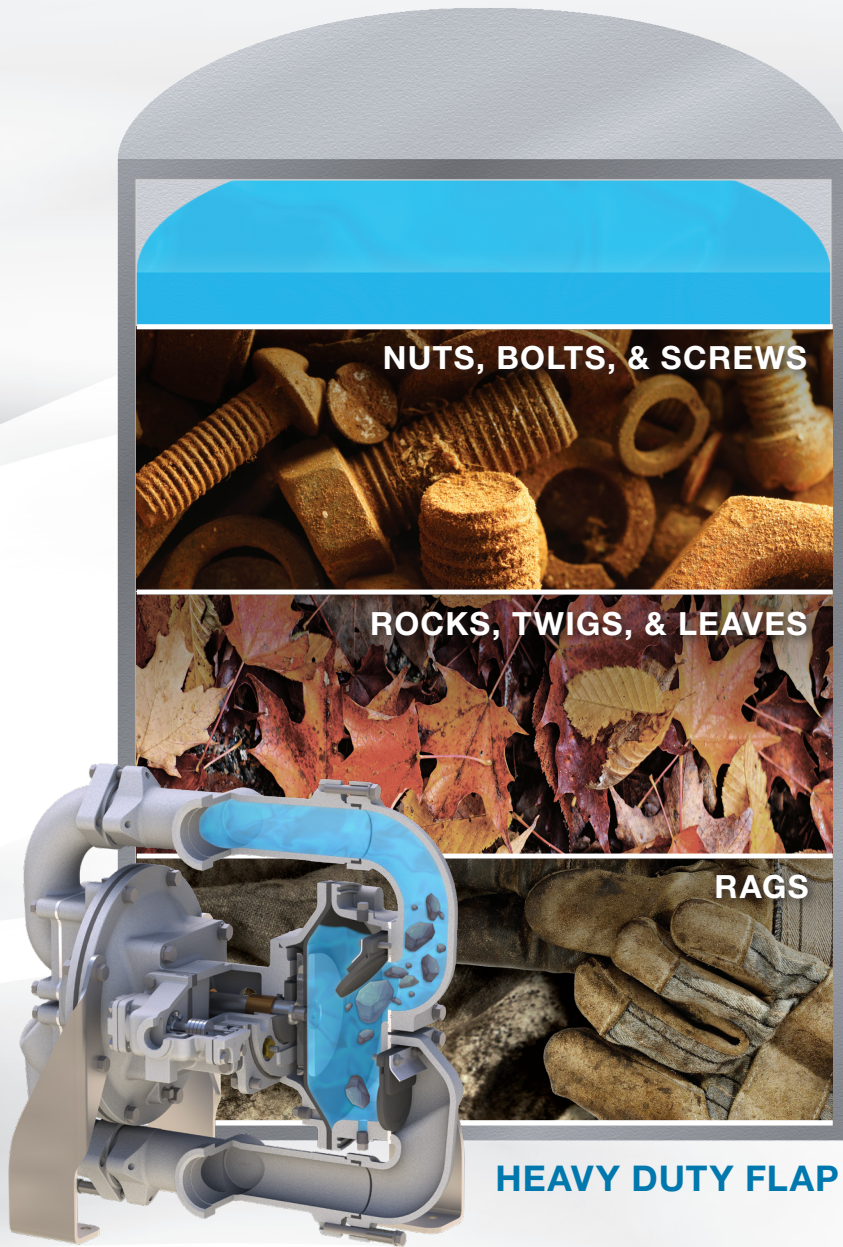

SANDPIPER SIGNATURE SERIES™: DESIGNED TO PROVIDE SUPERIOR

- Industrial Sumps
- Mine Dewatering
- Mud Transfer
- Filter Press
- Slurries
- Rendering
- Wastewater
- Pulp
- Ceramic Slip

CT PUMP?

CONDITIONS




FLOATING SOLIDS

PEA GRAVEL

SAND & SLURRIES

HEAVY DUTY BALL

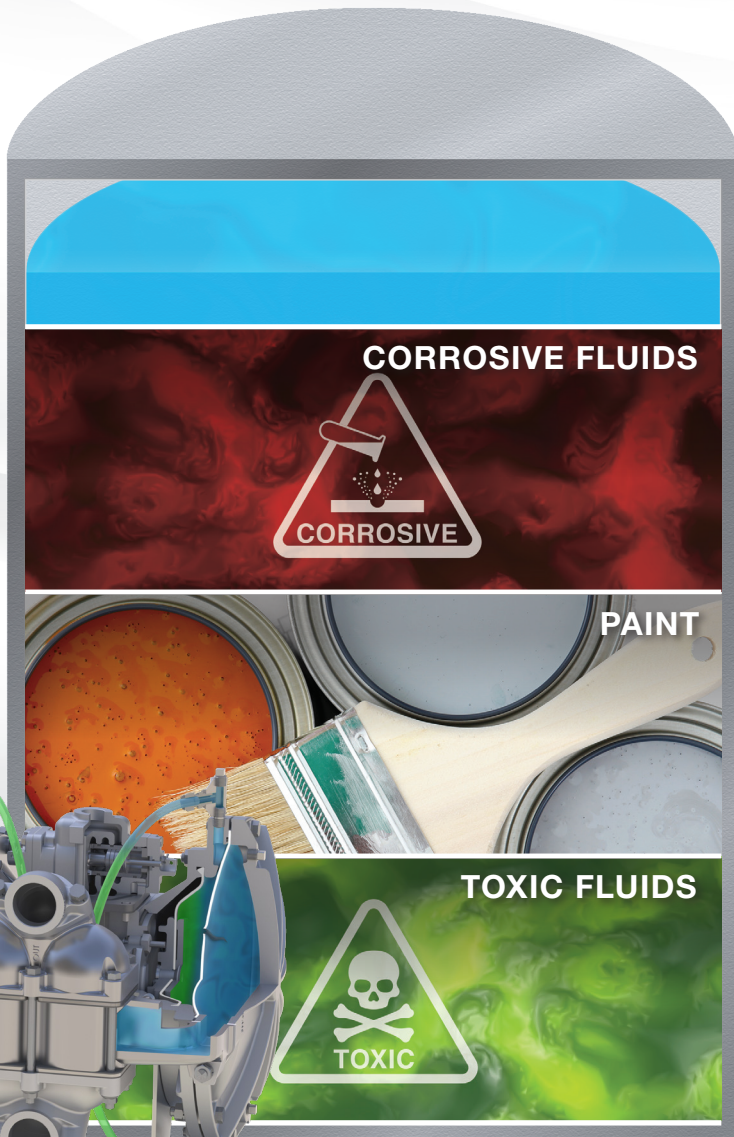

CORROSIVE FLUIDS




PAINT

TOXIC FLUIDS



CONTAINMENT DUTY

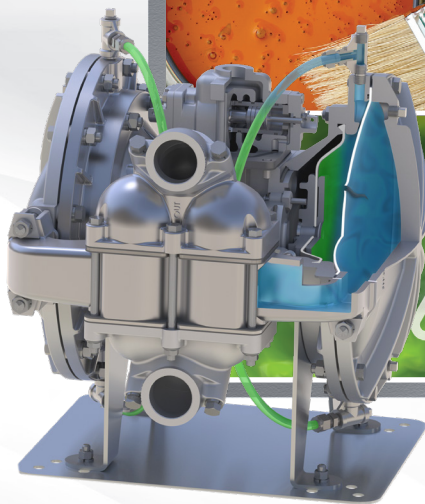


BETTER PERFORMANCE WHERE OTHER AODD PUMPS FAIL


- Paints
- Glues
- Resins
- Food
- Chemicals
- Hydrocarbons
- Animal Fats
- Varnish
- Latex Lotions
- Asphalt Sealant
- Fertilizers
- Beer & Alcohol

SANDPIPER VS COMPETITION

HEAVY DUTY FLAP VALVE PUMP

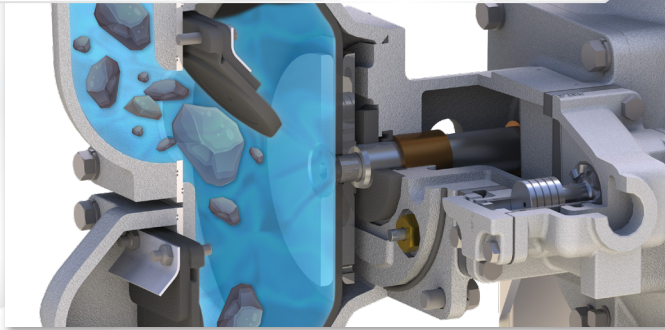


Large solids easily pass through pump

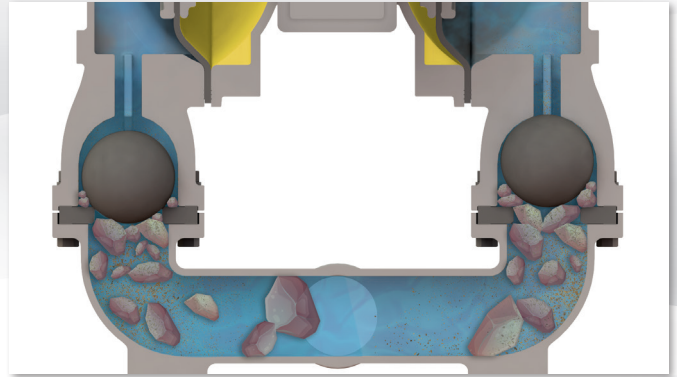


Large solids cannot pass through pump, affecting operation

HEAVY DUTY BALL VALVE PUMP

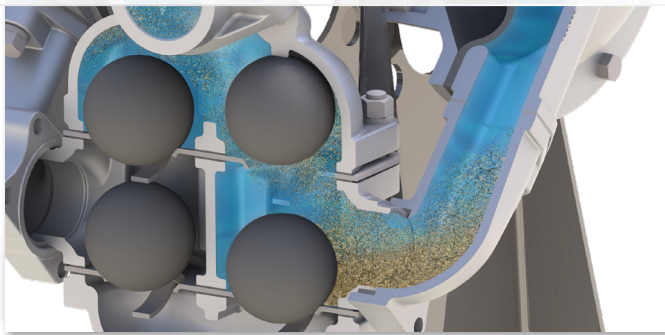


Settling solids easily pass through pump

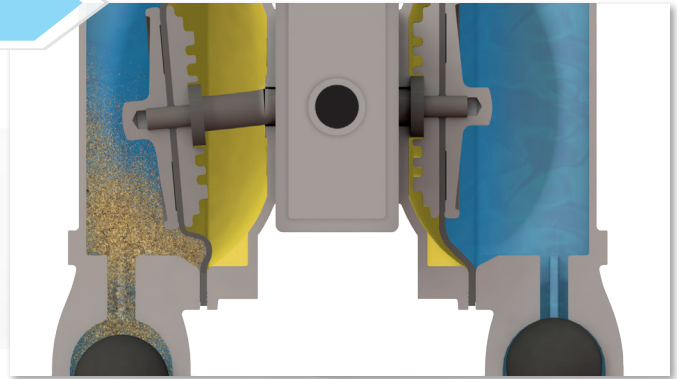


Settling solids collect inside pump, causing damage & affecting operation

CONTAINMENT DUTY BALL VALVE PUMP

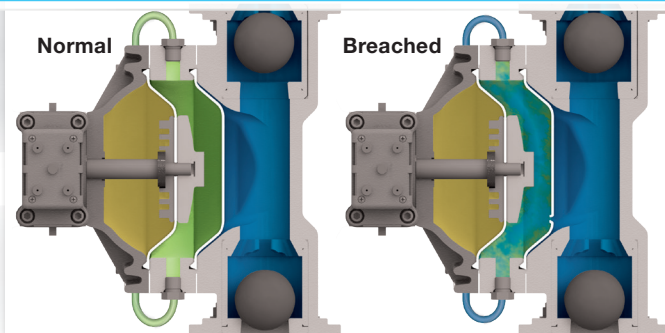

Contains fluid when diaphragm becomes breached

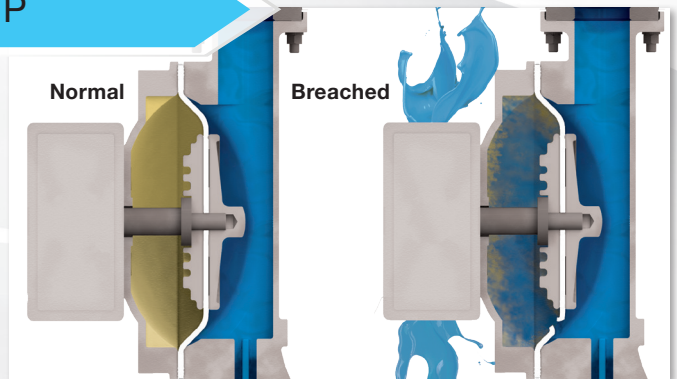

Fluid escapes to environment when diaphragm becomes breached.



Warren Rupp, Inc. | A Unit of IDEX Corporation
800 North Main Street, Mansfield, OH 44902 USA
Phone: 419.524.8388 | Fax: 419.522.7867
SANDPIPERPUMP.COM



Contact Your Local Distributor to Place Your Order:

