


STEEEDA[®]
Steeda S650 Clutch Assist Spring
Installation Instructions: 555-7033



Tools Needed

1. Flat head screwdriver or pry tool

Disassembly

1. Press the clutch pedal fully using your hand.
2. Place the flat head screwdriver or pry tool on the lower side of spring perch and slide it to the right side to remove the clutch spring assembly.

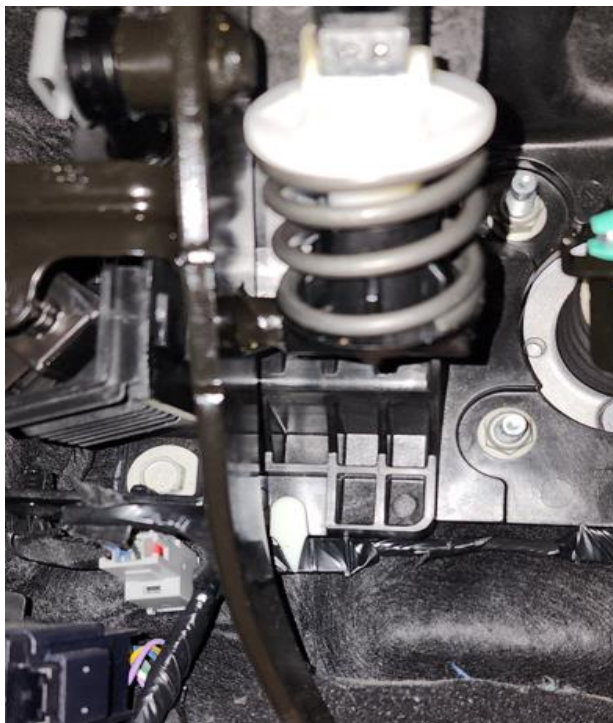


Figure 1



Figure 2

Assembly

1. Assemble the factory spring perches with the Steeda clutch assist spring. The Steeda spring is taller than the OEM for proper function and spring rate.
2. Place the bottom spring perch on the welded pin on the factory pedal.



Figure 3



Figure 4

4. Next swing the assembly up into position, compress the spring using your hands and place the upper spring perch into the factory channel on the pedal.
5. Release the clutch spring.
6. Test the clutch pedal several times to make sure the clutch spring is operational.

Enjoy!