






Kit Contents PRN015412

Ⓐ 6 x Rubber Bungs

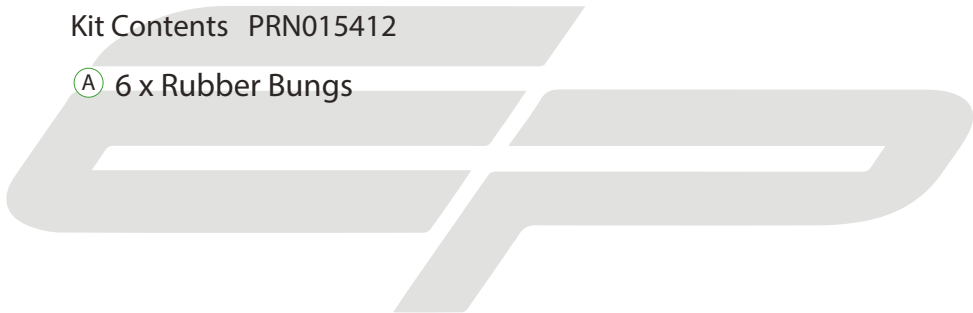

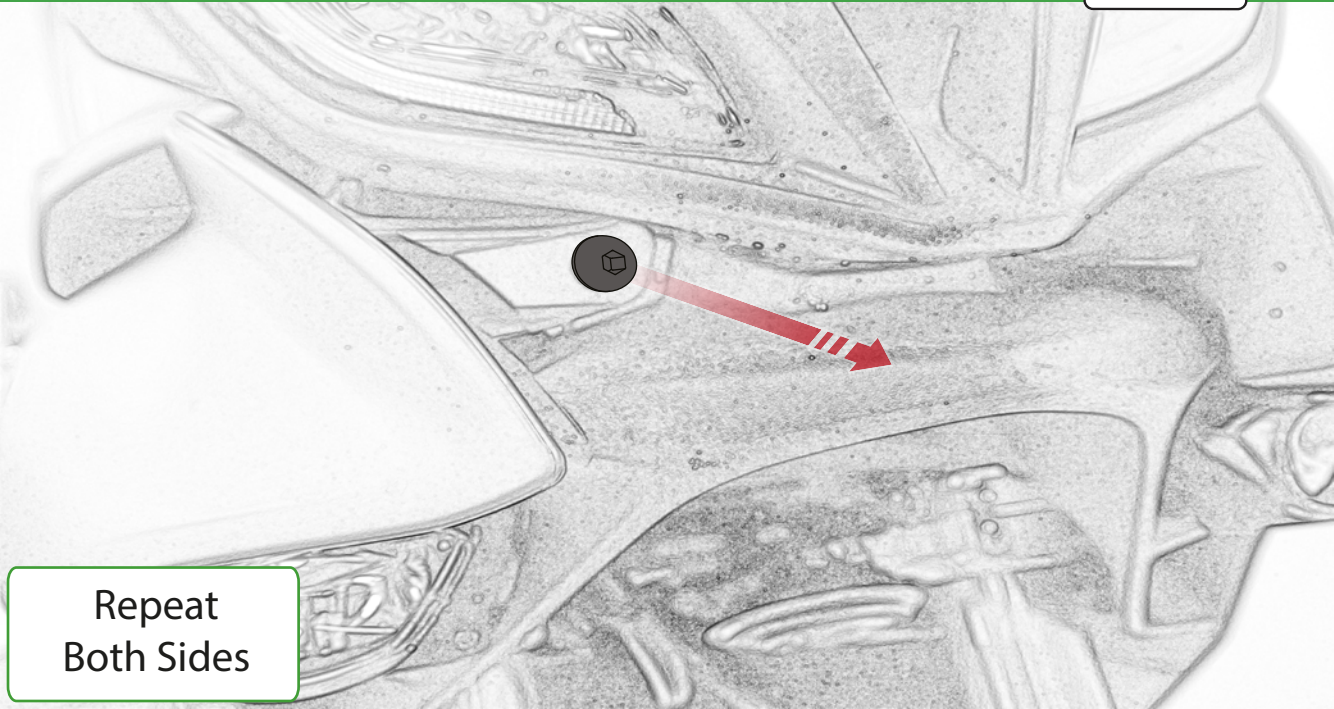

Repeat
Both Sides

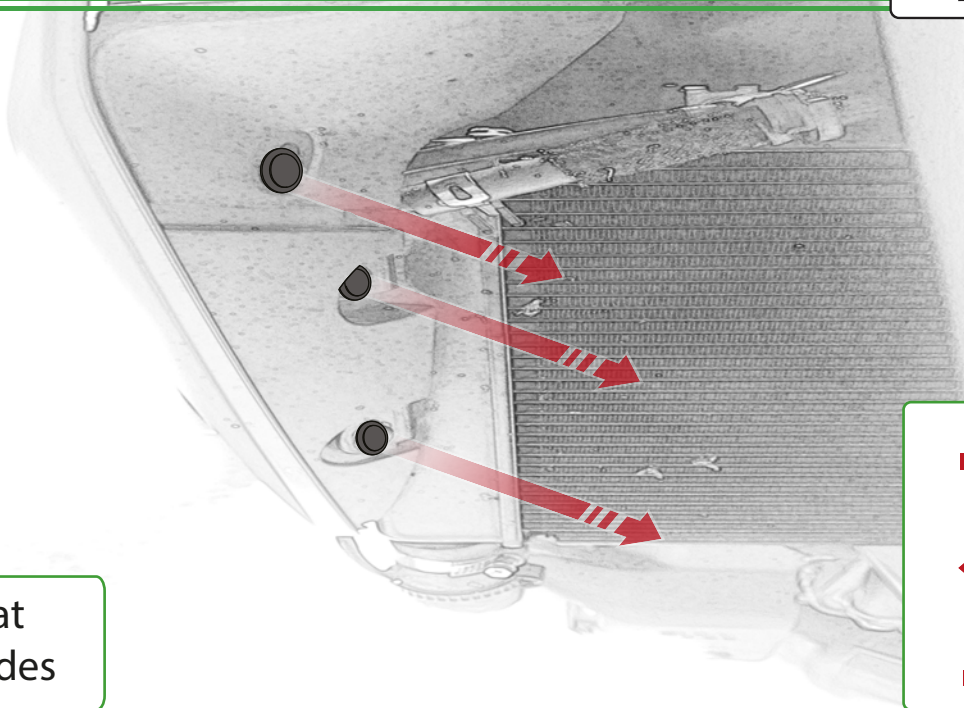


Repeat
Both Sides

RELEASE

RE-SET


RE-FIT

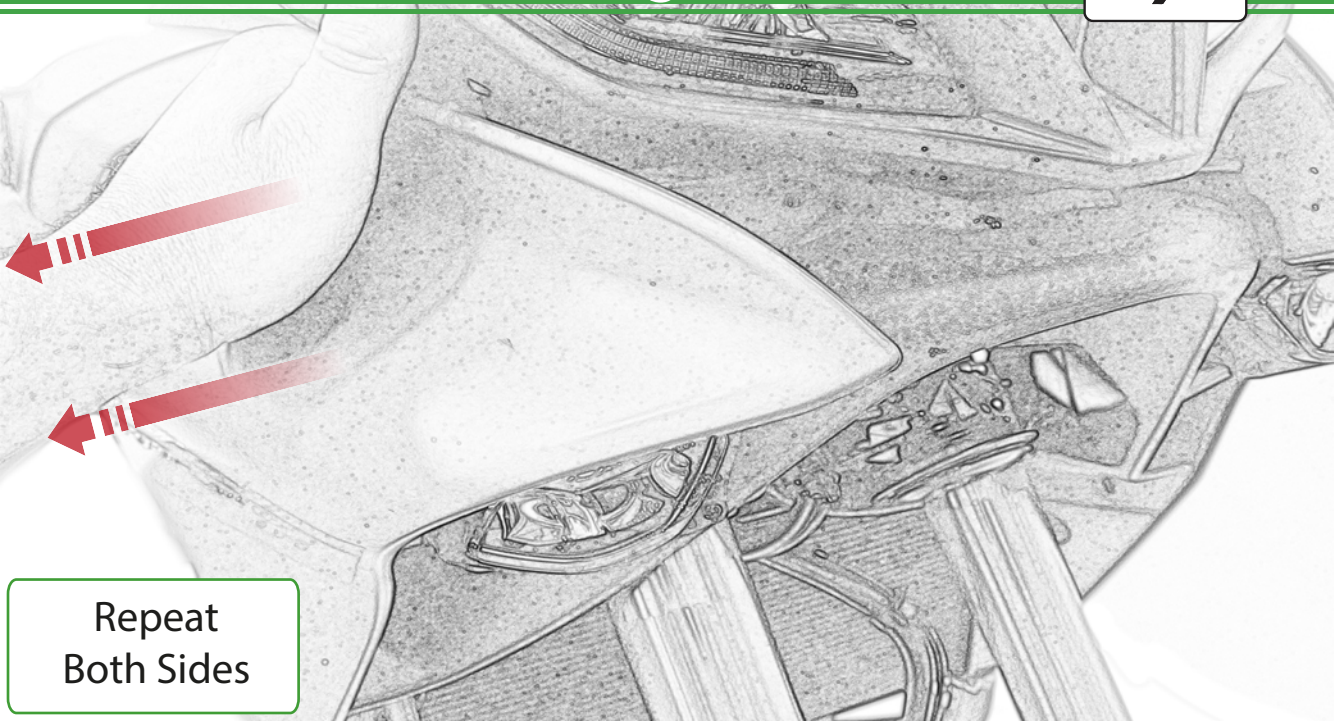


Repeat
Both Sides



Repeat
Both Sides

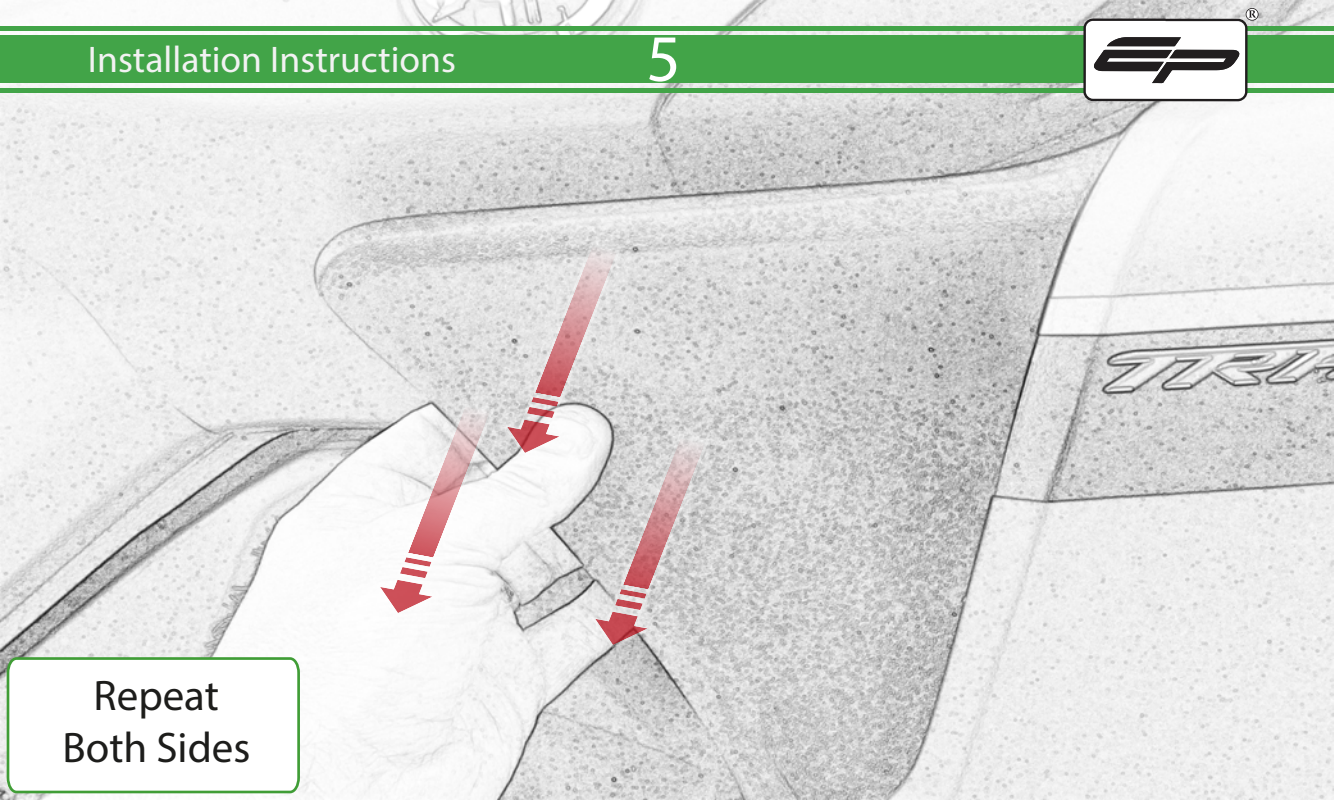



Repeat
Both Sides

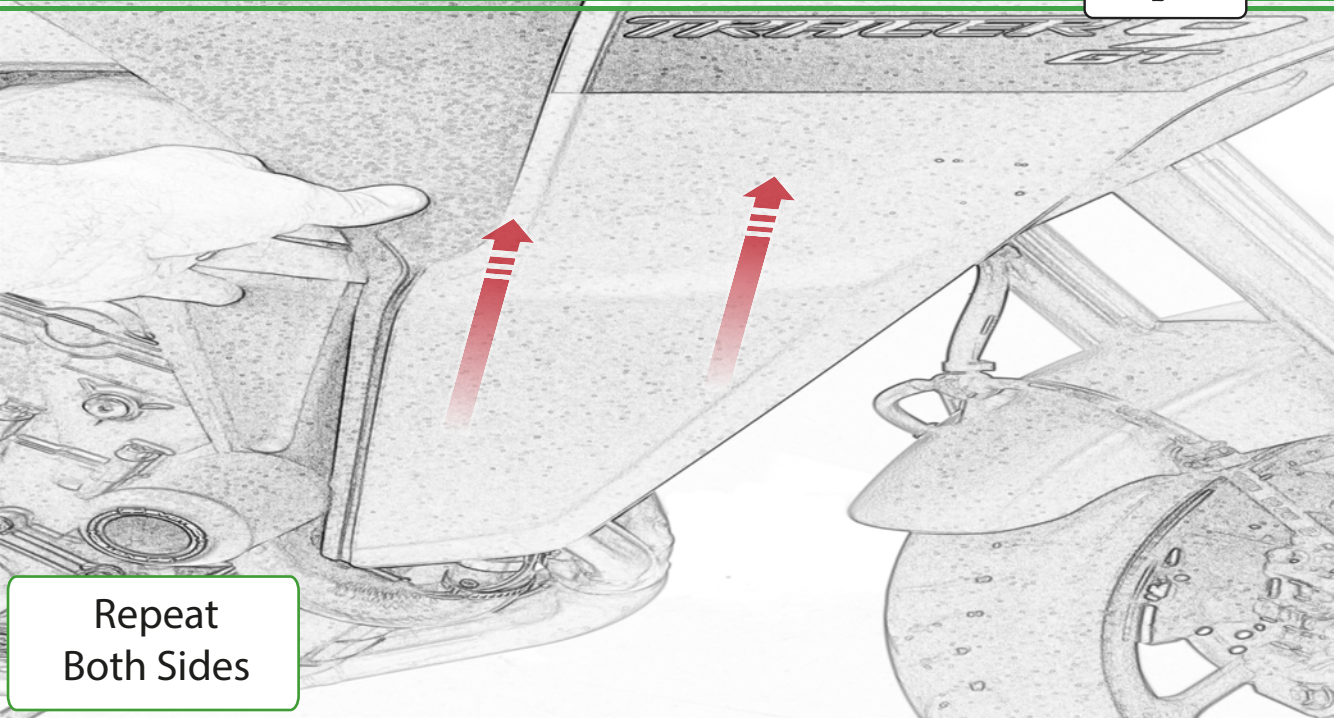

Repeat
Both Sides




Remove Wire
Connector

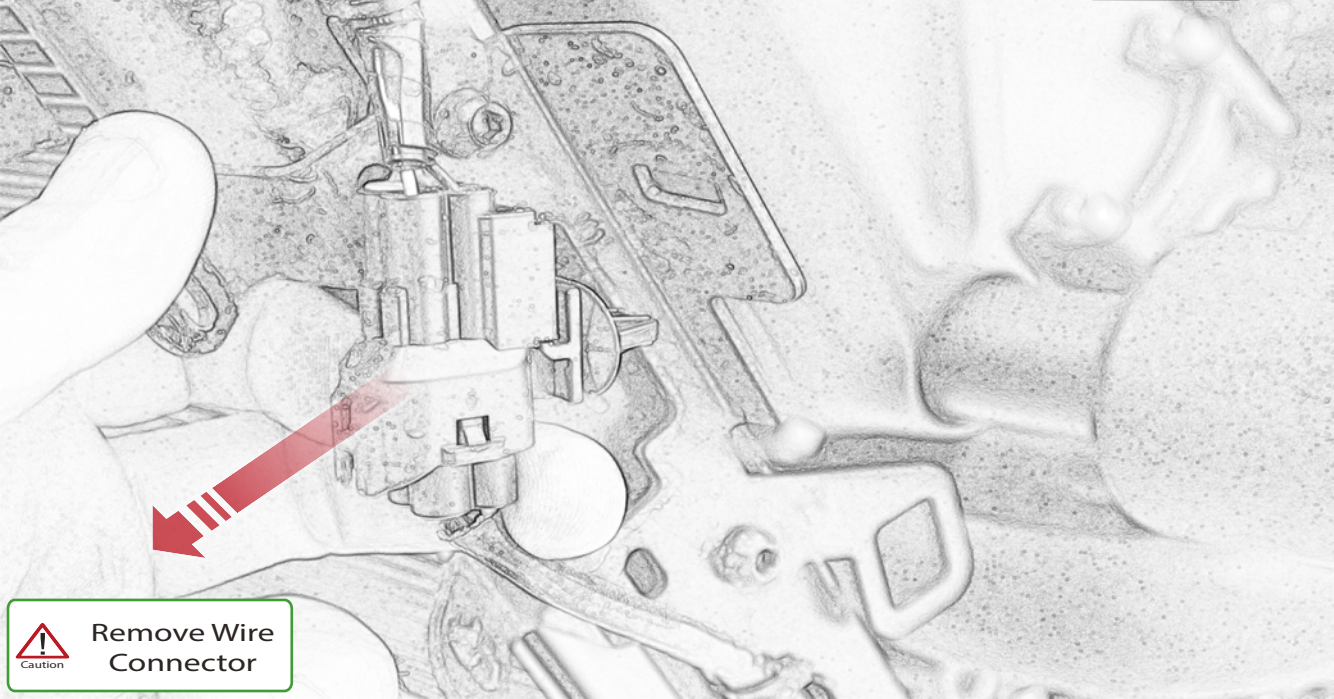


Remove Wire
Connector




Repeat
Both Sides

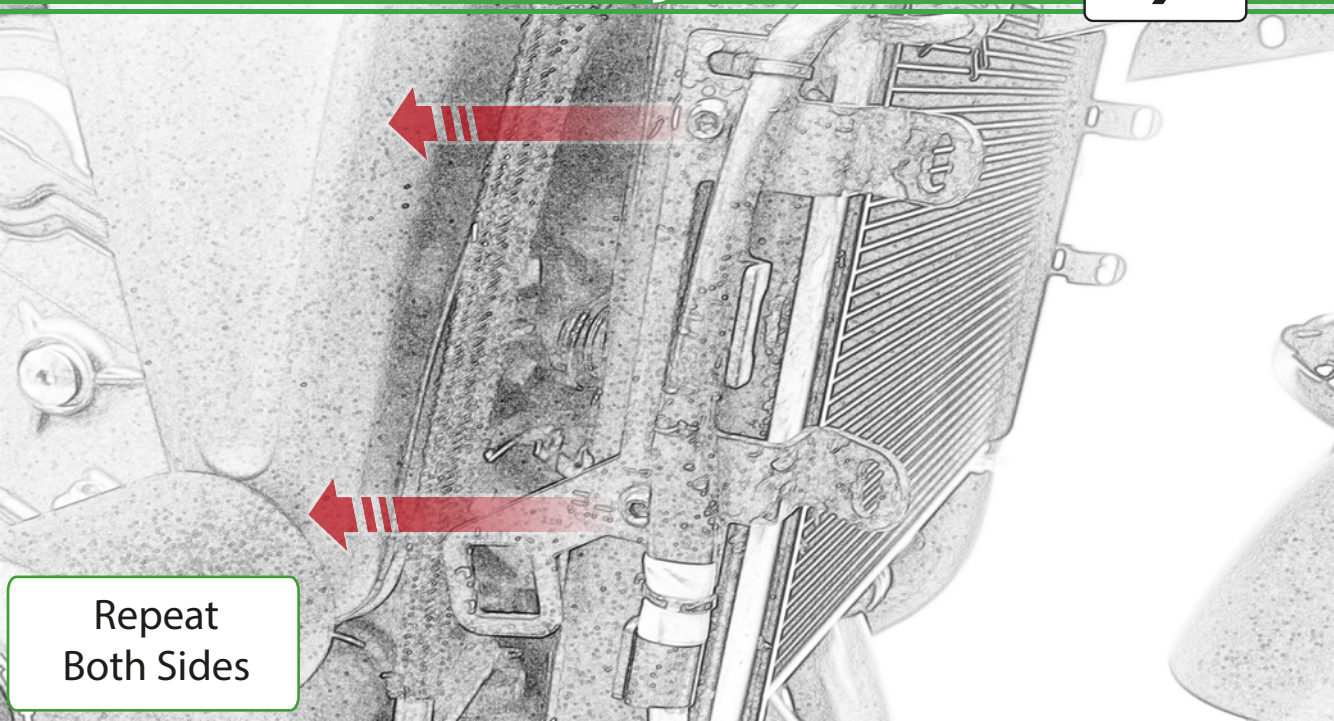


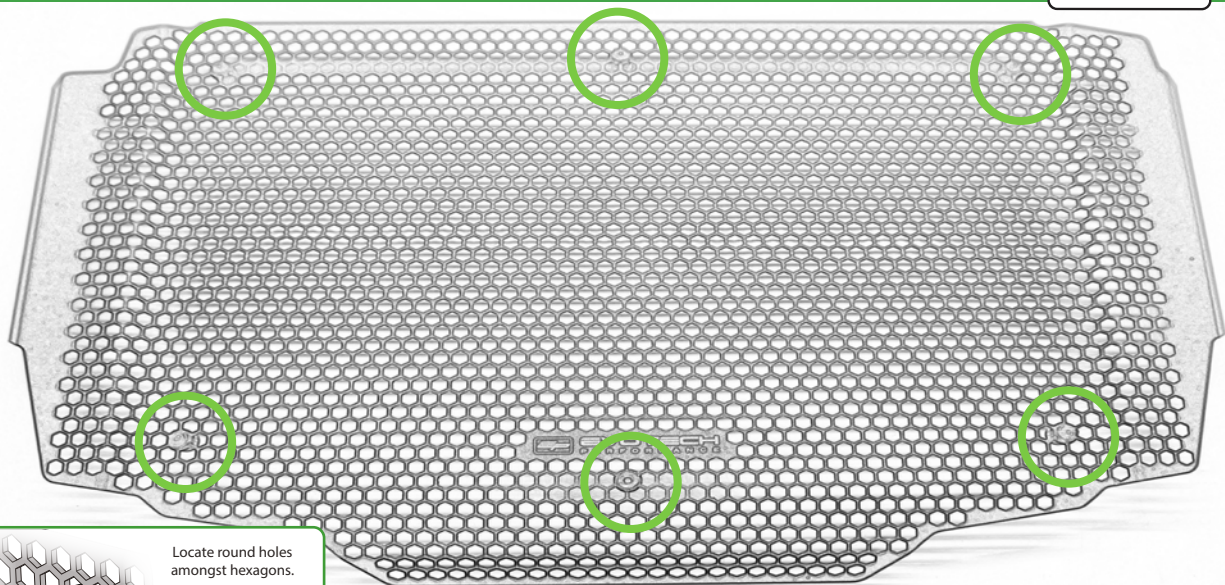


Locate round holes amongst hexagons.


Push Rubber Spacer through from the back of the guard so Hexagonal shape sits on the front face



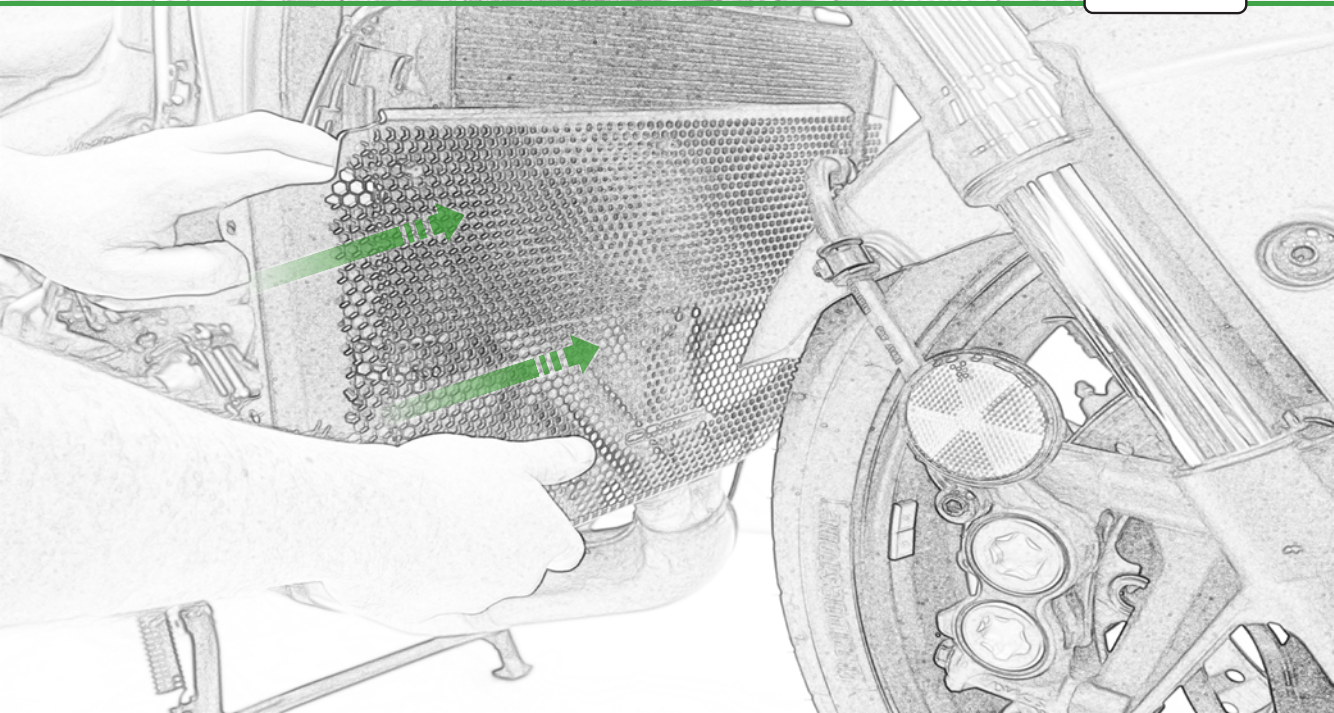

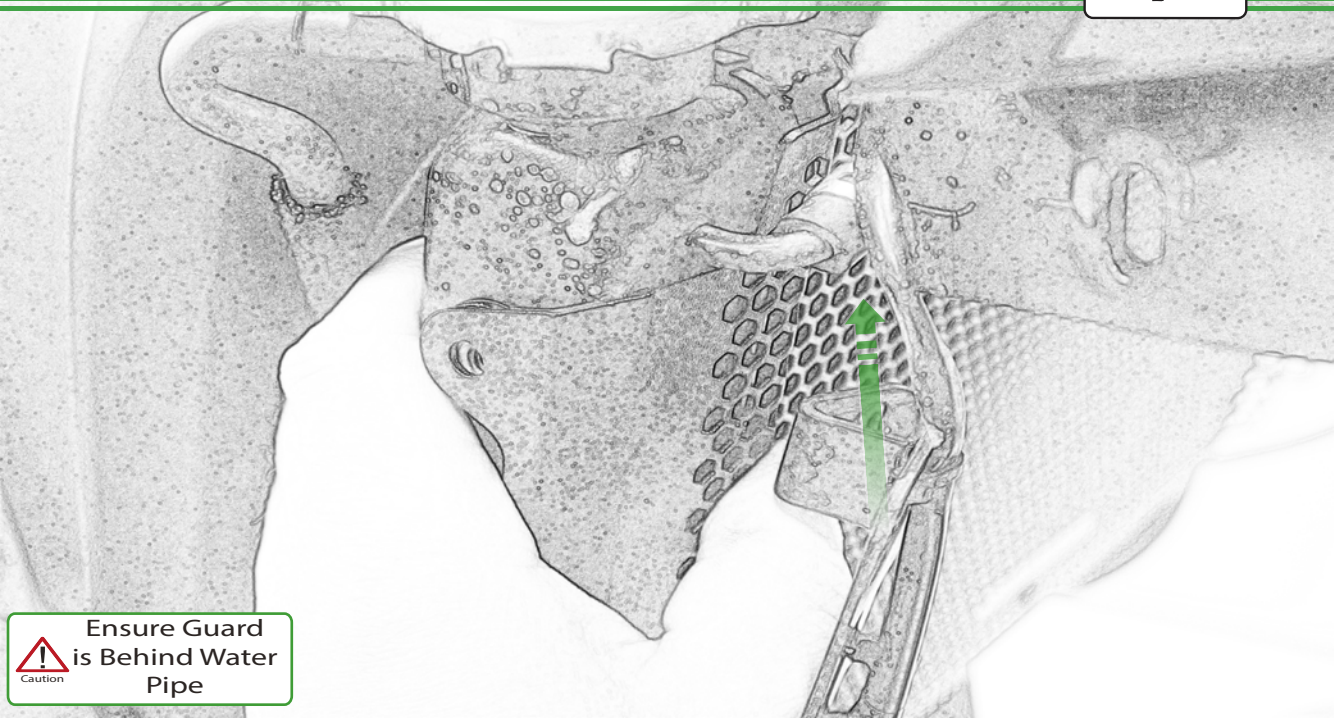


Ensure Guard
is Behind Water
Pipe

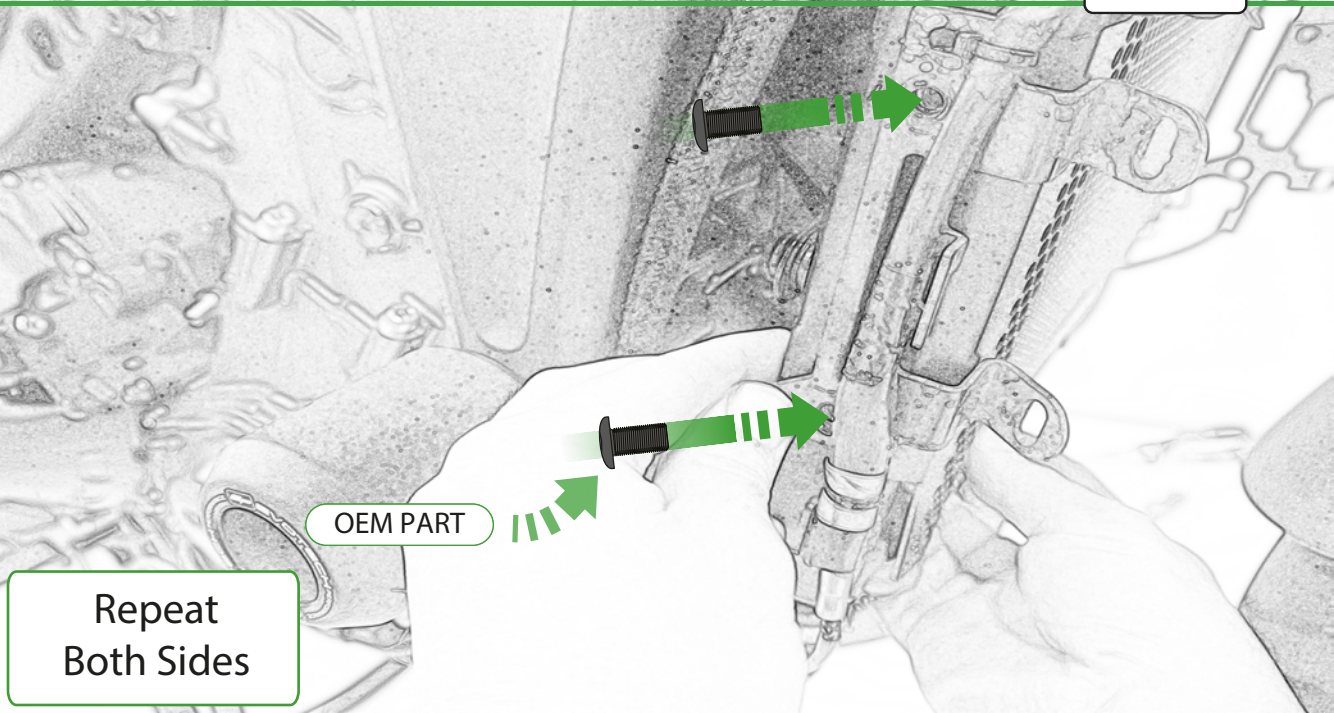

OEM PART

Repeat
Both Sides

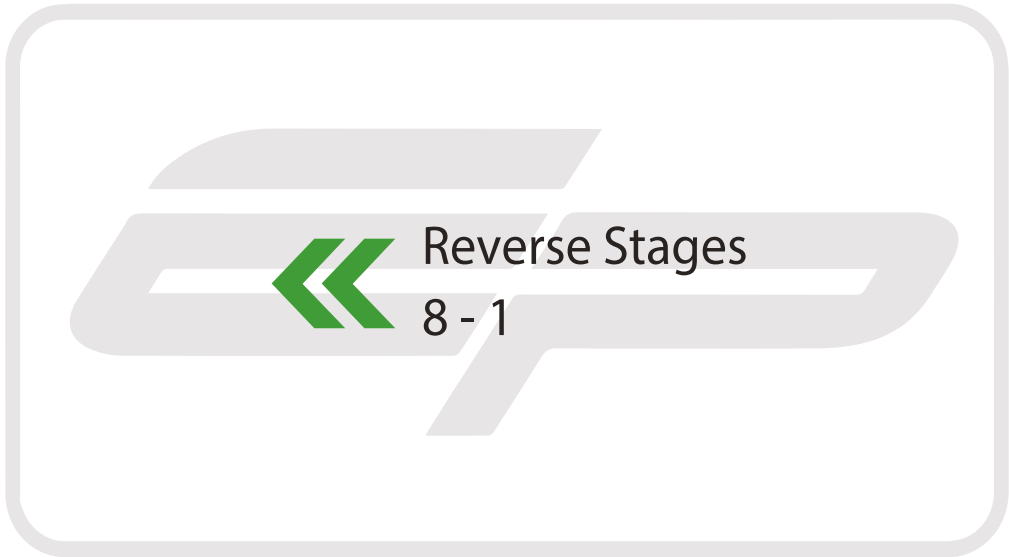



ESSENTIAL CHECKS

It is recommended that periodic inspections are made to ensure that dirt and debris have not become trapped between the guard and the radiator/oil cooler. Such dirt and debris would reduce the cooling efficiency of the radiator/oil cooler.

It is recommended that periodic inspections are made to ensure that all fixings are fully tightend.