



FITTING INSTRUCTIONS FOR LP0351BK LICENCE PLATE BRACKET



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS OR
HAVE FITTED BY A QUALIFIED TECHNICIAN.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF
MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,
THESE RUBBER WASHERS CAN BE THROWN AWAY.

DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:

WWW.RG-RACING.COM

**PLEASE REFER TO PAGE 11 FOR AN ADDITIONAL PART
THAT HAS BEEN ADDED**

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ
Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> • Set of metric Allen keys to include 3, 4 & 5mm A/F size. • 10mm spanners or socket and wrench. <ul style="list-style-type: none"> • Set of Torx keys or bits to include T30 and T40 <ul style="list-style-type: none"> • Cable cutters. • Small amount of adhesive. 	<p>M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm M8 BOLT = 20Nm M10 BOLT = 40Nm M12 BOLT = 40Nm</p>


LEGEND

ITEM NO.	DESCRIPTION	QTY
ITEM 1	LICENCE PLATE BRACKET (TB0351 WITH SPACERS)	1
ITEM 2	M6 x 25mm LONG BUTTON HEAD BOLTS	4
ITEM 3	M6 WASHERS	4
ITEM 4	M5 x 20mm LONG BUTTON HEAD BOLTS	2
ITEM 5	M5 WASHERS	2
ITEM 6	ORIGINAL INDICATOR ADAPTORS (I0037)	2
ITEM 8	INDICATOR WIRING COVERS (IWC0002)	2
ITEM 10	LA0002 LICENCE PLATE ILLUMINATOR WITH SHROUD	1
ITEM 11	REFLECTOR	1
ITEM 12	150mm LENGTH OF HEATSHRINK	3
ITEM 13	SELF-ADHESIVE CABLE CLIPS	2
ITEM 14	LICENCE PLATE ILLUMINATOR CONNECTOR (CON0028)	1
ITEM 15	2.5mm CABLE TIES	4



R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com

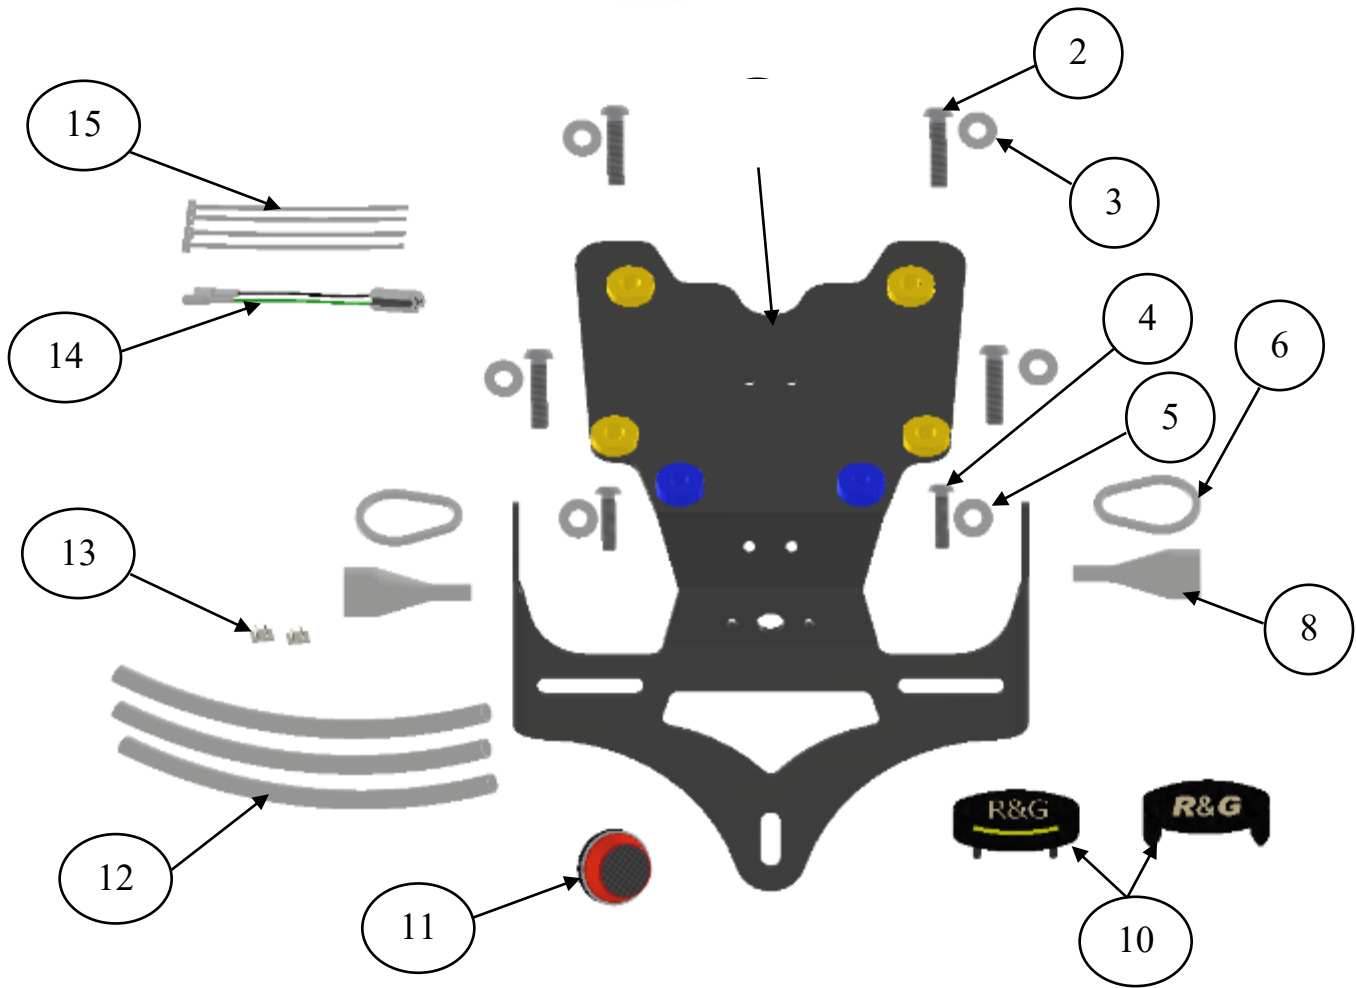

ASSEMBLY DIAGRAM

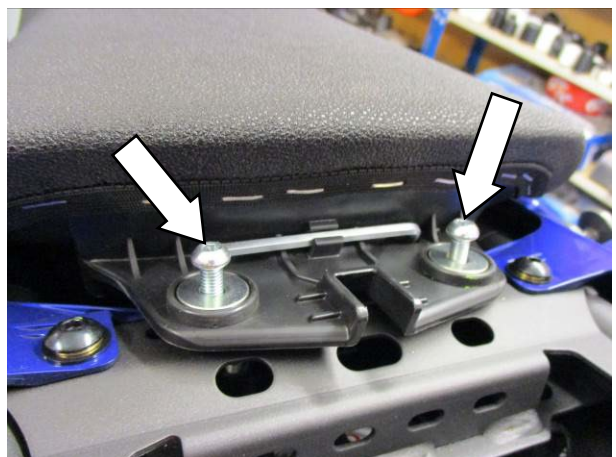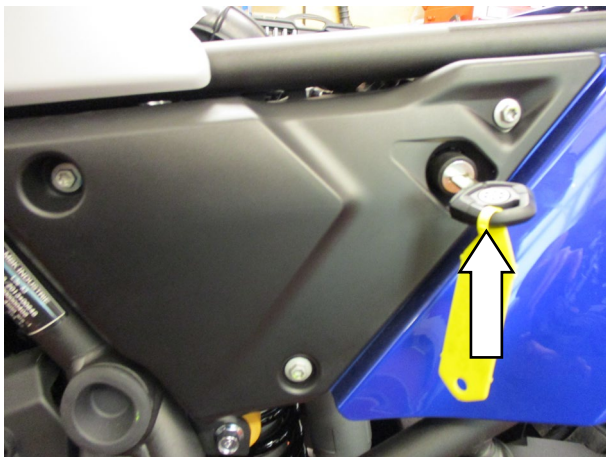


R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ


Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com




PICTURE 1

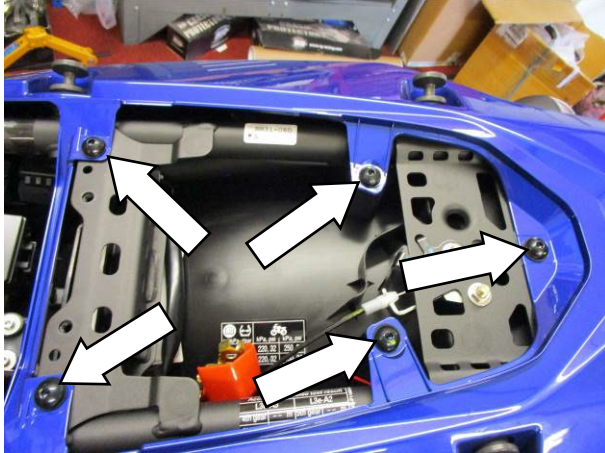


PICTURE 2

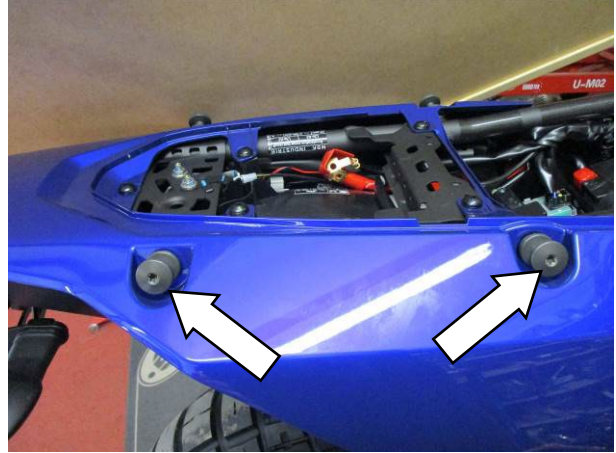


PICTURE 3

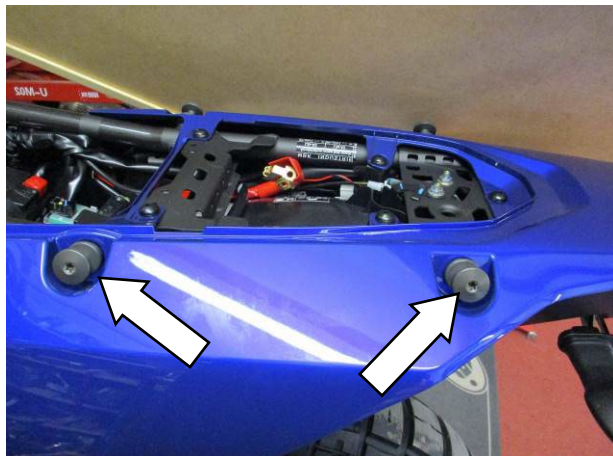

PICTURE 4

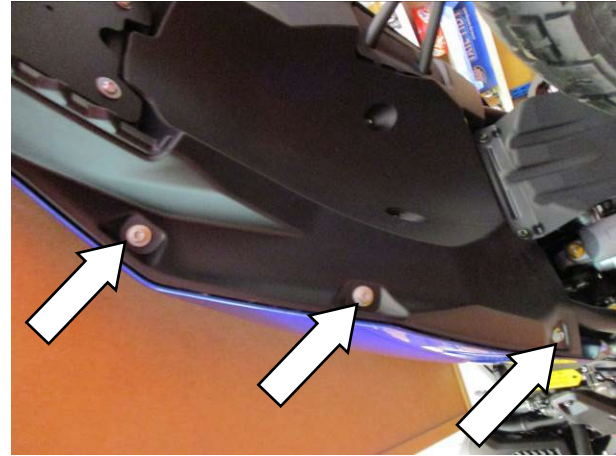

PICTURE 5

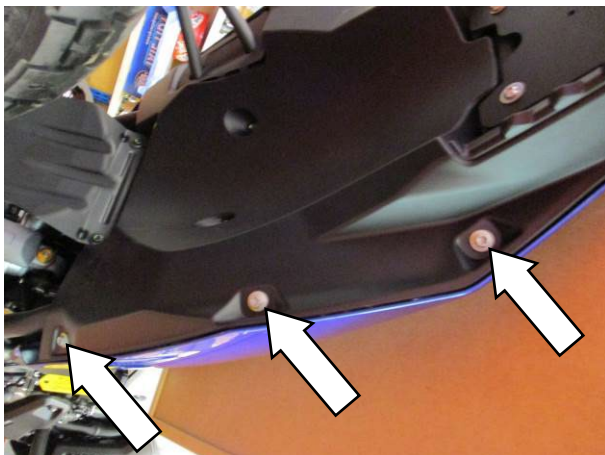


PICTURE 6



R&G



PICTURE 7

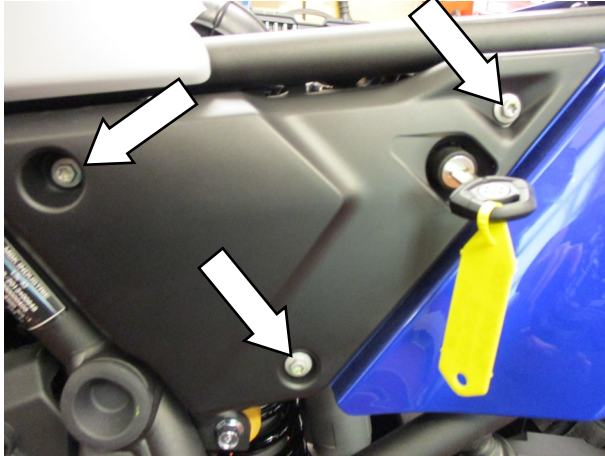


PICTURE 8




PICTURE 9




PICTURE 10

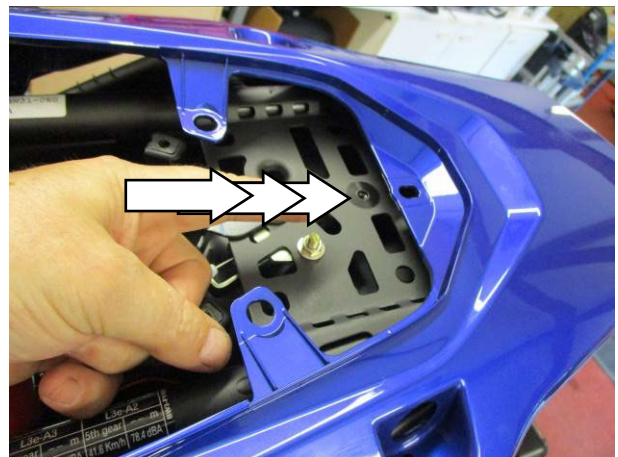

PICTURE 11

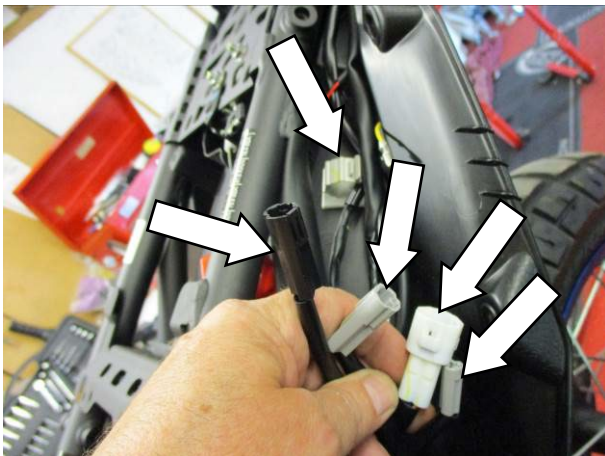

PICTURE 12

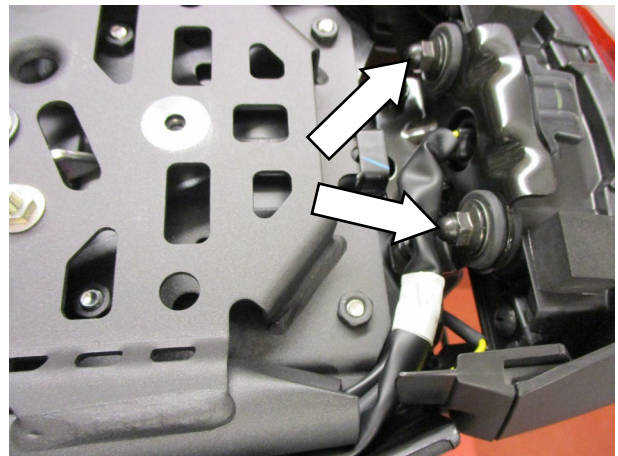


R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ


Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



PICTURE 13


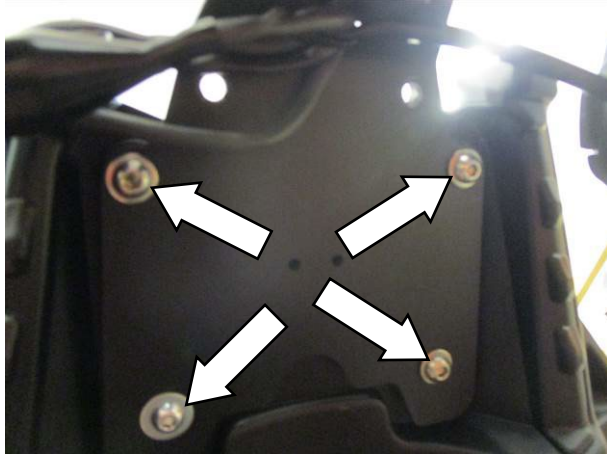


PICTURE 14

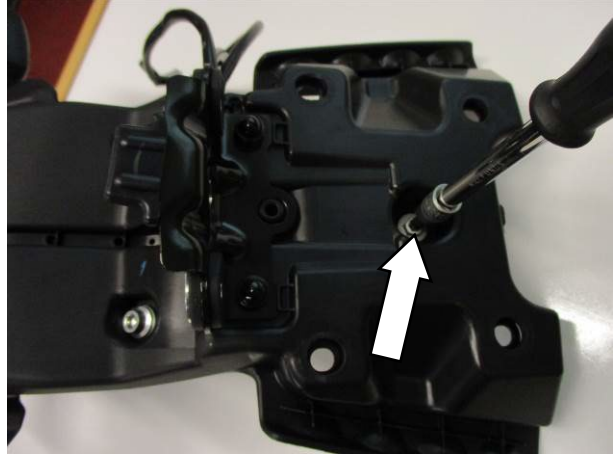


PICTURE 15

PICTURE 16

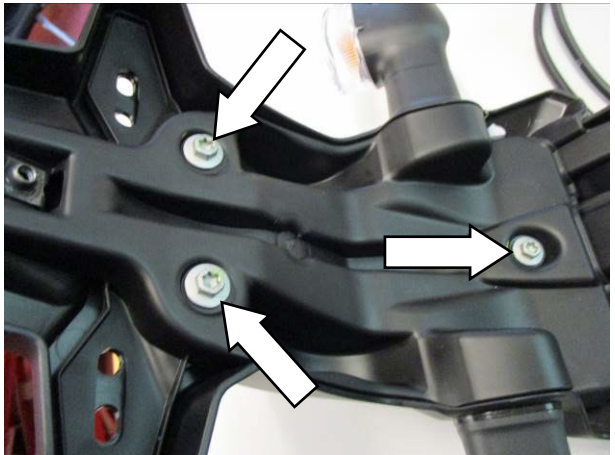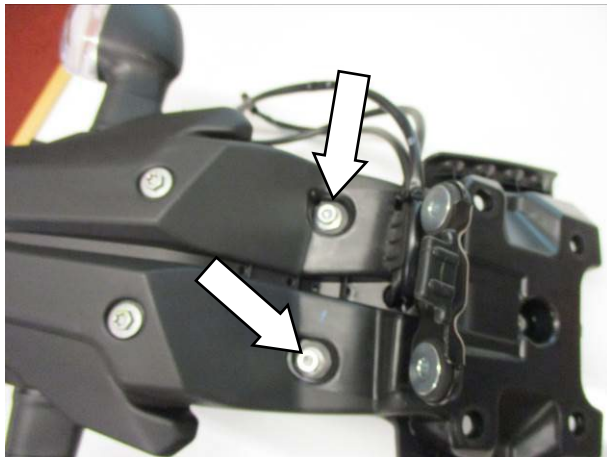

PICTURE 17

PICTURE 18

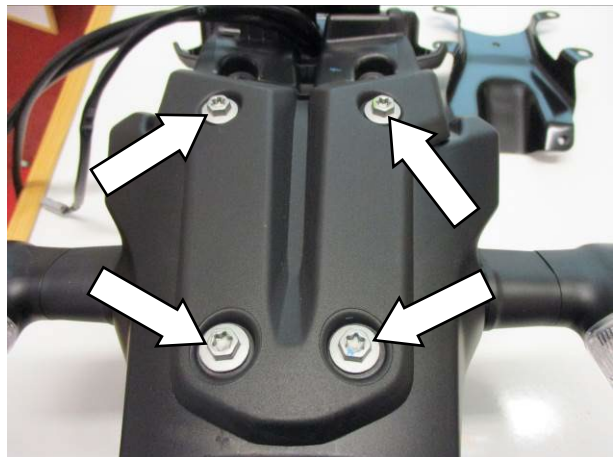

R&G



PICTURE 19




PICTURE 21

PICTURE 20



PICTURE 22

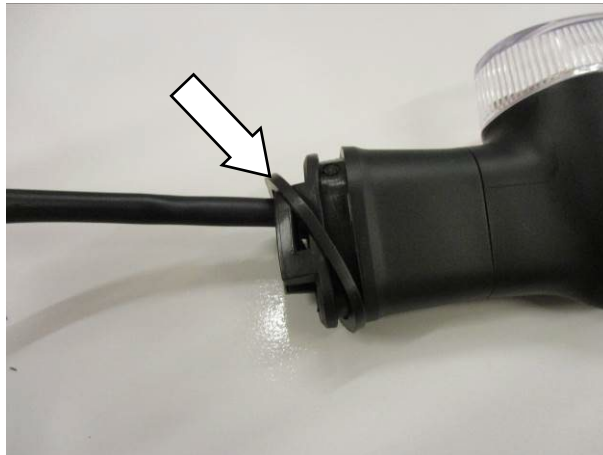

PICTURE 23




PICTURE 24



PICTURE 25

PICTURE 26

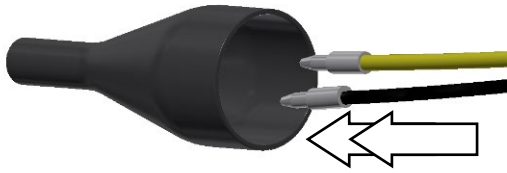


PICTURE 27

PICTURE 28




PICTURE 29

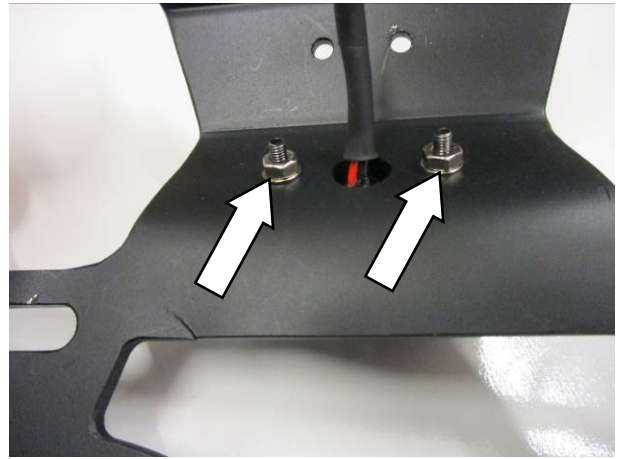

PICTURE 30



PICTURE 31

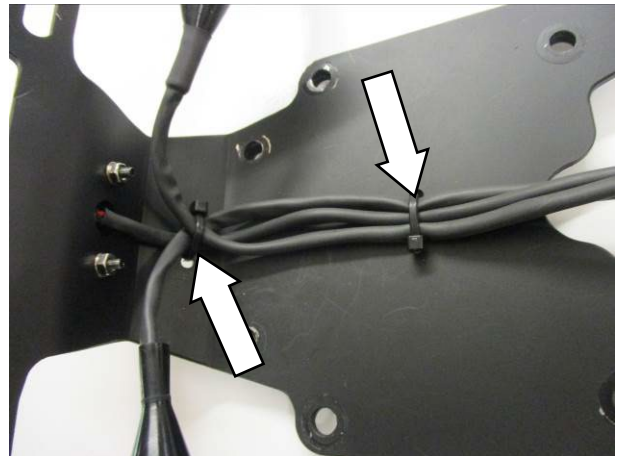

PICTURE 32



FITTING INSTRUCTIONS

- Remove the passenger seat using the key as arrowed in **picture 1**.
- Remove the two bolts arrowed in **picture 2** and remove the rider's seat.
- Remove the five bolts arrowed in **picture 3**.
- Remove the four luggage spacers as shown in **pictures 4 and 5**.
- Remove the six bolts arrowed in **pictures 6 and 7**.
- Remove the three bolts arrowed in **picture 8** and remove the infill panel.
- Remove the three bolts arrowed in **picture 9** and remove the infill panel.
- Remove the two push rivets arrowed in **pictures 10 and 11**.
- Gently and carefully spread the seat cowling and push in the direction of arrows as shown in **picture 12** to remove the seat cowl.
- Remove the four plug sockets arrowed in **picture 13**.
- Remove the two nuts arrowed in **picture 14**.
- Remove the four bolts arrowed in **picture 15** and remove the original rear light/ licence plate bracket.
- Remove the three bolts arrowed in **pictures 16 and 17**, then remove the original metal bracket from the assembly.
- Remove the four bolts arrowed in **pictures 18 and 19**, then remove the wiring cover from the assembly.
- Remove the four bolts arrowed in **picture 20**, then remove the cover panel.
- Remove the rear light and bracket (you will need to remove several cable ties to free the wiring).

If reusing the original indicators

- Remove the spreader plate as shown in **picture 21** and carefully squeeze the indicator stalk and remove the indicator from the bracket, then repeat for the remaining indicator (please note which side they were removed from).
- Place the thin indicator adaptor (**item 6**) onto both indicator stalks as shown in **pictures 22 and 23**.
- Gently squeeze the indicator stalk and fit to the new licence plate bracket (**item 1**) and secure as original with the spreader plate as shown in **picture 24**.
- Fit the remaining indicator as above.


To continue

- Feed the wires of the new R&G licence plate illuminator (**item 10**) through the central hole in the new licence plate bracket (**item 1**) as shown in **pictures 29 and 30**.
- Secure using the washers and nut supplied as shown in **picture 30**.
- Fit one length of heat-shrink (**item 12**) to the wires and heat gently to shrink to fit.
- Fit the light shroud and use a small amount of adhesive to hold it in position as shown in **picture 31**.
- Please ensure the wiring and wiring covers are neat and tidy using the supplied clips and cable ties (**items 13 and 15**) as shown in **picture 32**.
- Offer the entire assembly up to the motorcycle and secure in position using the M6 bolts with washers (**items 2 and 3**).
- Refit the rear light and bracket as original using the two shorter M5 bolts and washers (**items 4 and 5**) through the rear two holes in the new licence plate bracket as shown below, refit the two original nuts.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ


Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com

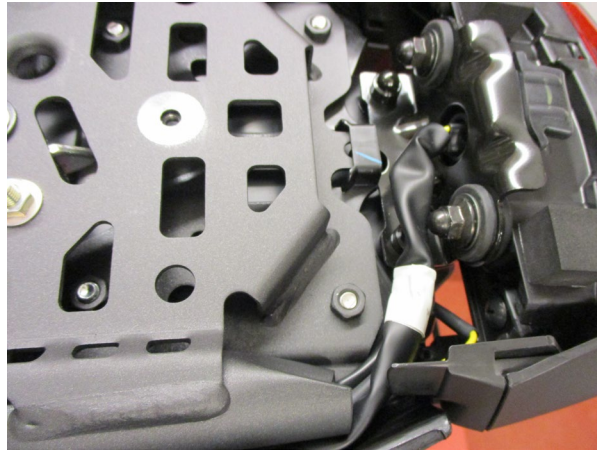

- Reconnect the rear light plug socket, connect the licence plate illuminator using the supplied connector (**item 14**), reconnect the indicators as original to the wiring loom.
- It is a good idea to check the operation of all lights at this stage, if the indicators or licence plate illuminator fail to function, please swap the connectors over.
- Refit the seat cowl and seats as original.
- **IMPORTANT: IF FITTING A FULL-SIZE LICENCE PLATE AND PLACING IT FAR DOWN ON THE LICENCE PLATE HANGER, THERE IS A SMALL CHANCE OF THE LICENCE PLATE HITTING THE BACK WHEEL UNDER HEAVY LOAD AND OVER LARGE BUMPS IN THE ROAD. IT IS YOUR RESPONSIBILITY TO CHECK FOR THIS POSSIBILITY AND TAKE AVOIDING ACTION. FAILURE TO CHECK THIS COULD RESULT IN SERIOUS INJURY.**
- Refit the seat unit and licence plate (it may require drilling).
- Depending on local laws, attach enclosed reflector (**item 11**) in an appropriate location.
- **Please test the indicators, rear light and licence plate illuminator before riding.**

ISSUE 1 12/06/2023 (TB)

IMPORTANT UPDATE
PLEASE READ BEFORE COMMENCING FITTING
FITTING INSTRUCTIONS FOR LP0351BK LICENCE PLATE BRACKET AMENDMENT

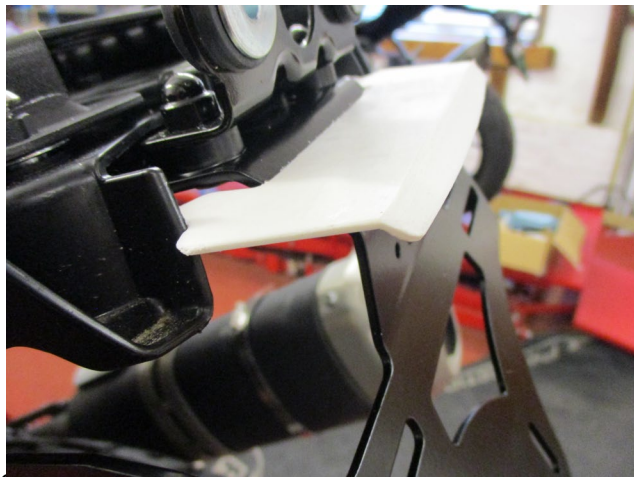



THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.



SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY. DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.


IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS OR HAVE FITTED BY A QUALIFIED TECHNICIAN.

ITEM NO.	DESCRIPTION	QTY
ITEM 1	COVER PLATE (TB0277 PART 2)	1

Part Diagram

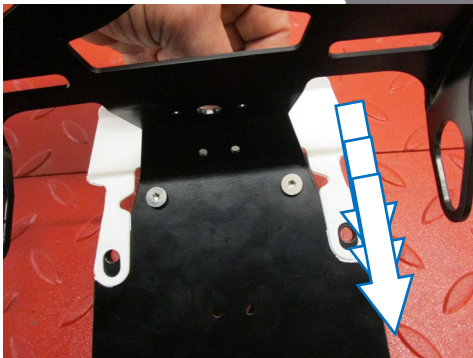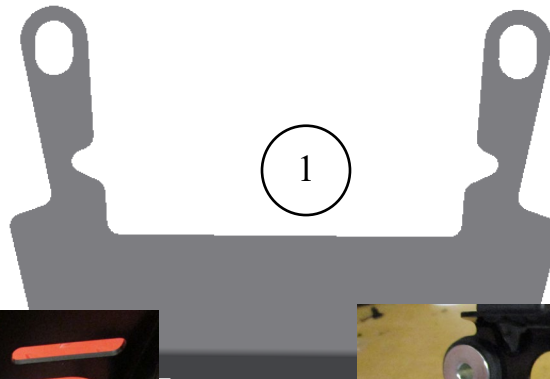

PICTURE 1

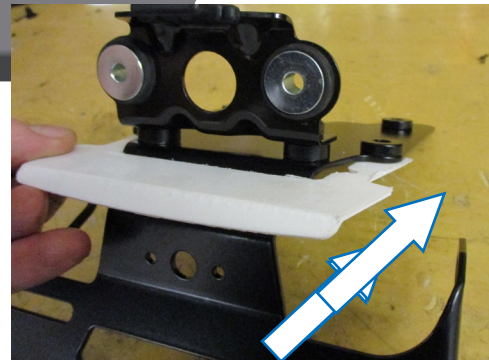

PICTURE 2

FITTING INSTRUCTIONS

- Before offering the new licence plate bracket assembly into position please fit the cover plate (**item 1**) over the licence plate bracket as shown in **pictures 1** and **2**.
- Then offer the complete assembly into position as shown in the **top picture** and continue assembly and testing as explained in the main fitting instruction.

INSTRUCTIONS DE MONTAGE

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com



- Avant de mettre en place le nouveau support de plaque d'immatriculation, veuillez placer la plaque de recouvrement (article 1) sur le support de plaque d'immatriculation comme indiqué sur les photos 1 et 2.
- Ensuite, offrez l'assemblage complet en position comme indiqué sur la photo du haut et continuez l'assemblage et les tests comme expliqué dans les instructions de montage principales.

MONTAGEANLEITUNG

- Bevor Sie den neuen Kennzeichenhalter in Position bringen, bitte die Abdeckplatte (**Artikel 1**) am Kennzeichenhalter montieren wie in den **Abbildungen 1 und 2** abgebildet.
- Anschließend die komplette Einheit in Position bringen wie im **obersten Bild** abgebildet und mit der Montage weitermachen wie in der Haupt-Montageanleitung erklärt.

ISSUE 1 12/16/2023 (TB)

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RACING RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G Racing. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G

Unit 1, Shelley's Lane, East Worldham, Alton, Hampshire, GU34 3AQ

Tel: +44 (0)1420 89007 Fax: +44 (0)1420 87301 www.rg-racing.com Email: info@rg-racing.com