


<u>FITTING INSTRUCTIONS FOR SRG0058SS</u> RADIATOR GUARD FOR SUZUKI GSX-S & R 125 '17-





In This Kit There Should Be 1x Stainless Radiator Guard (SRG0058SS) 2 x 100mm Lengths of self-adhesive Foam 2 x 220mm long cable ties 1 x R&G Sticker

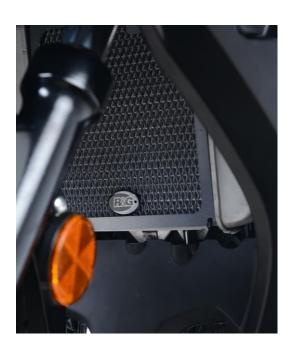




Picture 1

Picture 2



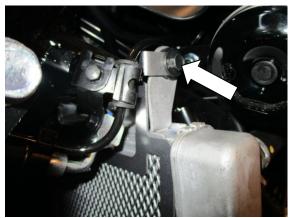



Picture 3

Picture 4

GENERAL TORQUE SETTINGS

M4 BOLT = 8Nm M5 BOLT = 12Nm M6 BOLT = 15Nm

FITTING INSTRUCTIONS

- To fit R&G stainless radiator guard to the bike, cut the foam strip provided into 10mm wide pieces and stick them to the back of the radiator guard frame, so that they sit between the radiator guard and the radiator.
- Starting from the right hand side (as you sit on the bike), remove the bolt arrowed in Picture 1.
- On the left hand side, remove the bolt arrowed in Picture 2.
- Offer the new R&G stainless radiator guard in position by aligning the two top mounting points to the radiator as original (Shown in Picture 3). Secure the radiator guard in position using the OEM bolts removed earlier on both sides and tighten to a maximum of 15Nm.
- From the kit, take the cable ties provided and feed one cable tie on each bottom corner hole and through the radiator matrix as shown in Picture 4. Lock the cable ties in position.

ISSUE 1 01/11/2017 (HH)

Digital copies of these instructions are available to download from www.rg-racing.com

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.


Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



NOTICE DE MONTAGE POUR SRG0058SS GRILLE DE PROTECTION RADIATEUR SUZUKI GSX-S & R 125 '17-

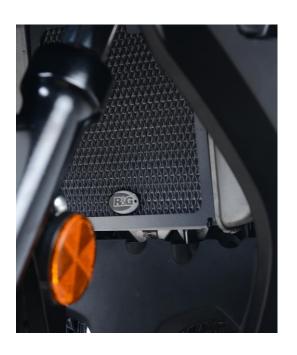



Le kit doit contenir

1 x Grille de protection radiateur (SRG0058SS) 2 x 100mm Longueurs de mousse autocollante. 2 x 220mm Colliers de serrage 1 x Sticker R&G

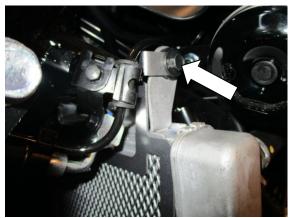




Photo 1

Photo 2





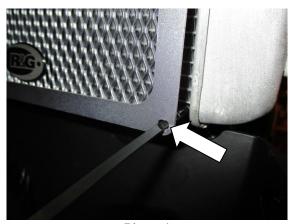


Photo 3

Photo 4

VALEURS DE SERRAGE RECOMMANDEES:

M4 BOULON = 8Nm M5 BOULON = 12NM M6 BOULON = 15NM

NOTICE DE MONTAGE

- Couper le bandeau de mousse fourni en pièces de 10mm puis collez-les au bas du cadre de protection radiateur, de façon à ce qu'elles se placent entre la protection radiateur et le radiateur.
- En partant du côté droit (Lorsqu'on est assis sur la moto), enlever le boulon indiqué sur la Photo 1.
- Du côté gauche, Enlever le boulon indiqué sur la Photo 2.
- Monter la nouvelle grille de radiateur R&G en position en alignant les 2 points de fixation supérieurs sur le radiateur comme à l'origine (voir Photo 3). Fixer la grille de protection radiateur en utilisant les boulons d'origine enlevés plus tôt des 2 côtés puis serrer à maximum 15Nm.
- Dans le kit, prendre les colliers de serrage fournis puis passer un collier de serrage dans chaque trou de coin inférieur puis dans la matrice de radiateur, voir Photo 4. Bloquer les colliers de serrage en position.

ISSUE 1 01/11/2017 (HH)

Notice disponible au téléchargement sur www.rg-racing.com

CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect.


Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.



MONTAGEANLEITUNG FÜR SRG0058SS KÜHLERSCHUTZ - SUZUKI GSX-S & R 125 '17-

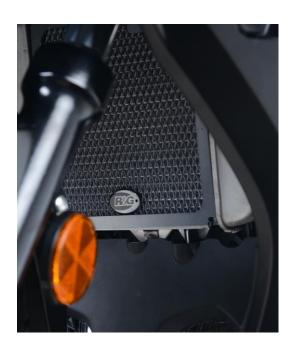



Dieser Kit beinhaltet:

1x Kühlerschutz (SRG0058SS)
2x 100mm selbstklebende Schaumstoffstreifen
2 x 220 mm Kabelbinder
1 x R&G Aufkleber

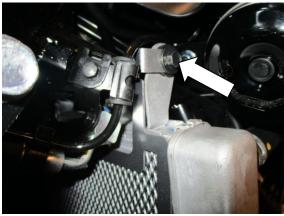






Abbildung 2





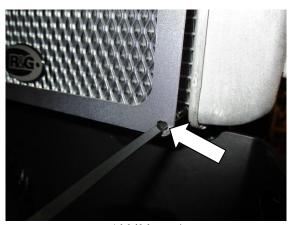


Abbildung 3

Abbildung 4

ANZUGSDREHMOMENTE:

M4 SCHRAUBE = 8 Nm M5 SCHRAUBE = 12 Nm M6 SCHRAUBE = 15 Nm

MONTAGEANLEITUNG

- Um den rostfreien Kühlerschutz am Motorrad zu montieren, schneiden Sie zuerst die mitgelieferten Schaumstoffstreifen in 10 mm breite Streifen und kleben Sie diese auf der Rückseite des Kühlerschutzrahmens, so dass sie zwischen dem Kühlerschutz und dem Kühler angebracht sind.
- Entfernen Sie die Schraube an der rechten Seite des Motorrades (in Fahrtrichtung), die in Abbildung 1 gekennzeichnet ist.
- Entfernen Sie die Schraube an der linken Seite des Motorrades, die in Abbildung 2 gekennzeichnet ist.
- Den R&G Kühlerschutz in Position bringen, indem Sie die zwei oberen Halterungen mit dem Kühler ausrichten wie beim Original (siehe Abbildung 3). Den Kühlerschutz an beiden Seiten mit den zuvor entfernten Originalschrauben befestigen (max. 15 Nm Anzugsdrehmoment).
- Nehmen Sie die Kabelbinder vom Kit. Führen Sie je einen Kabelbinder durch die Öffnungen unten an der Ecke und durch das Kühlergitter siehe Abbildung 4. Die Kabelbinder in Position festziehen.

AUSGABE 1 01/11/2017 (HH)

Eine digitale Version dieser Montageanleitung kann auf folgender Seite heruntergeladen werden: www.rg-racing.com CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorised (if not pre-authorised the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.