



**FITTING INSTRUCTIONS FOR SRG0072SS STAINLESS STEEL RADIATOR GUARD  
BMW S1000RR 2019-**



Picture A



Picture B

**THIS KIT CONTAINS THE ITEMS PICTURED AND LABELLED OVER PAGE.**

SOME PARTS MAY BE SHOWN FOR CLARITY OF INSTRUCTIONS ONLY.

DO NOT PROCEED UNTIL YOU ARE SURE ALL PARTS ARE PRESENT.

**PLEASE READ ALL INSTRUCTIONS BEFORE PROCEEDING.**

PLEASE NOTE THAT THE WAY THE KIT IS PACKED DOES NOT NECESSARILY REPRESENT THE WAY OF MOUNTING TO THE BIKE.

IN THE EVENT OF RUBBER WASHERS BEING USED TO HOLD COMPONENTS ONTO BOLTS,  
THESE RUBBER WASHERS CAN BE THROWN AWAY.

**DIGITAL COPIES OF THESE INSTRUCTIONS ARE AVAILABLE FROM:**

[WWW.RG-RACING.COM](http://WWW.RG-RACING.COM)

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.


Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



<u>TOOLS REQUIRED</u>	<u>GENERAL TORQUE SETTINGS</u>
<ul style="list-style-type: none"> <li>T25 Torx Tool</li> </ul>	<p>M4 BOLT = 8Nm                      M5 BOLT = 12Nm                      M6 BOLT = 15Nm                      M8 BOLT = 20Nm                      M10 BOLT = 40Nm                      M12 BOLT = 40Nm</p>

**LEGEND**

ITEM No.	DESCRIPTION	QTY
ITEM 1	SS RAD0072 STAINLESS STEEL RADIATOR GUARD	1
ITEM 2	100mm LENGTH OF SELF-ADHESIVE FOAM	8
ITEM 3	220mm LONG CABLE TIES	4

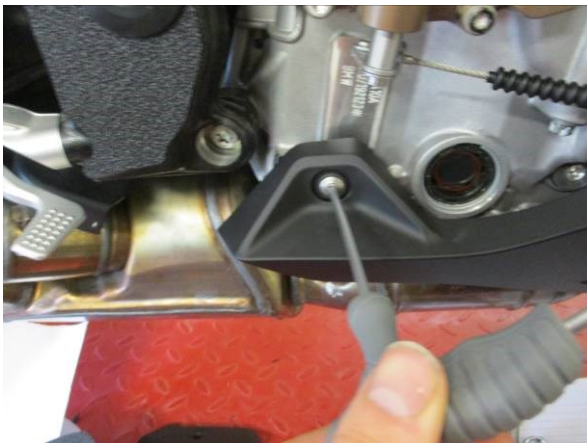

Picture 1



Picture 2



Picture 3



Picture 4

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.


Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



Picture 5




Picture 6

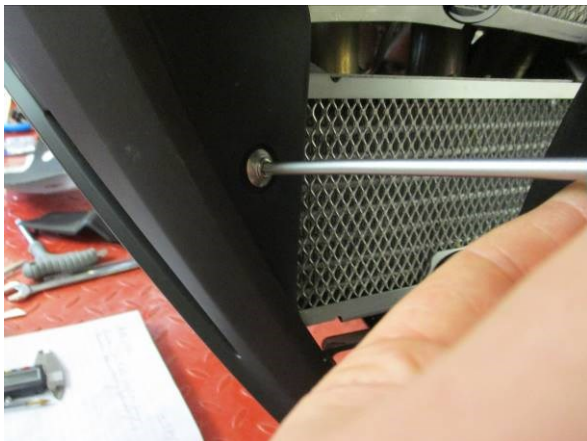

Picture 7



Picture 8

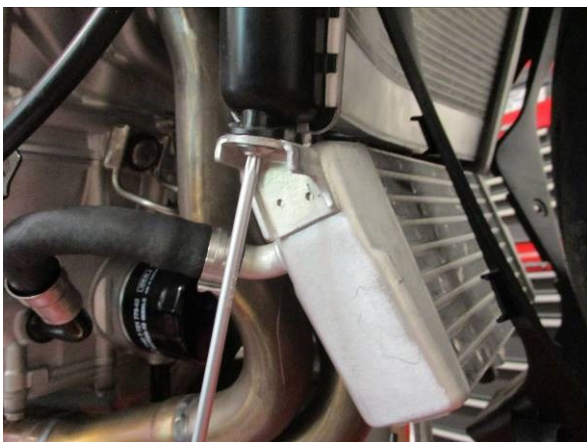

Picture 9



Picture 10

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



Picture 11

### **FITTING INSTRUCTIONS**

- Starting on the right-hand side of the bike, remove the 5x fairing bolts shown in pictures 1-5 using a T25 Torx key/socket.
- Using the same tool for all remaining steps, remove the bolt securing the two sides of the fairing together, as shown in picture 6.
- Remove the 4x lower inner fairing bolts as shown in picture 7, then the 4x upper inner fairing bolts as shown in picture 8.
- Gently remove the RHS fairing, then repeat previous steps for the LHS fairing.
- Remove the 2x bolts joining the radiator guard to the oil cooler, as shown in picture 9.
- Arrange and fix the strips of protective foam (item 2) to the inner frame of the radiator guard (item 1), then offer the guard up to the radiator.
- Position the radiator guard tabs between the radiator and oil cooler joining points as shown in picture 10, then secure with the original bolts.
- Secure the top corners of the radiator guard by threading a cable tie (item 3) through the guard's upper securing slots and looping them around the radiator mounting points, as shown in picture 11.

ISSUE 1 - 14/10/2019 (FB)

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



#### CONSUMER NOTICE

The catalogue description and any exhibition of samples are only broad indications of the Products and R&G may make design changes which do not diminish their performance or visual appeal and supplying them in such state shall conform to the order. The Buyer acknowledges no representation or warranty (other than as to title) has been given or will apply to the Products other than those in R&G's order or confirmation and the Buyer confirms it has chosen the Products as being of merchantable quality and suitable for its particular purposes. Where R&G fits the Products or undertakes other services it shall exercise reasonable skill and care and rectify any fault free of charge unless the workmanship has been disturbed. The Buyer is responsible for ensuring that the warranty on the motorcycle is not affected by the fitting of the Products. On return of any defective Products R&G shall at its option either supply a replacement or refund the purchase money but shall not be liable if the Products have been modified or used or maintained otherwise than in accordance with R&G's or manufacturer's instructions and good engineering practice or if the defect arises from accident or neglect. Other than identified above and subject to R&G not limiting its liability for causing death and personal injury, it shall not be liable for indirect or consequential loss and otherwise its liability shall be limited to the amounts paid by the Buyer for the Products or the fitting or service concerned. These terms do not affect the Buyer's statutory rights.

#### R&G RETURNS POLICY (NON-FAULTY GOODS)

Returns must be pre-authorized (if not pre-authorized the return will be rejected). Goods may only be returned direct to us if they were purchased direct from us (customer must prove if necessary). Otherwise to be returned to original vendor. Goods must be in re-sellable condition, in the opinion of R&G. All returns are subject to a 25% restocking and handling fee (25% of the gross value exc. P&P – at the prevailing price at time of purchase). The customer must pay any and all carriage charges. No returns of discontinued products, unless within 14 days of purchase. This policy does not affect your statutory rights and does not refer to faulty goods.

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



**NOTICE DE MONTAGE SRG0072SS PROTECTION RADIATEUR**  
**BMW S1000RR 2019-**

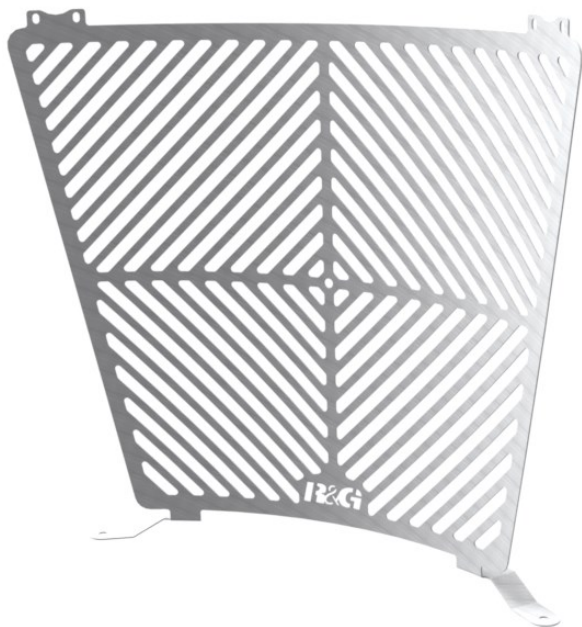


Photo A



Photo B

**LE KIT CONTIENT LES ARTICLES EN PHOTO ET ETIQUETTES SUR LA PAGE**

LES PARTIES PRÉSENTÉES PEUVENT ÊTRE UNIQUEMENT REPRESENTATIVES POUR LA CLARTE DES INSTRUCTIONS

NE PAS PROCÉDER AU MONTAGE AVANT DE VOUS ÊTRE ASSURÉ QUE TOUTES LES PIÈCES SOIENT PRÉSENTES.

**SVP, LIRE L'ENSEMBLE DE LA NOTICE AVANT DE PROCÉDER AU MONTAGE.**

**IF IN ANY DOUBT WHEN FITTING OUR PRODUCTS, CONSULT ONE OF OUR DEALERS  
OR HAVE FITTED BY A QUALIFIED TECHNICIAN.**

LA FAÇON DONT LE KIT EST EMBALLÉ NE CORRESPOND PAS FORCÉMENT À LA FAÇON DE MONTER LES  
PIÈCES SUR LA MOTO .

NOTEZ QUE SI LES KITS SONT EMBALLÉS AVEC DES RONDELLES EN CAOUTCHOUC SERVANT À TENIR  
LES COMPOSANTS, CES RONDELLES DOIVENT ÊTRE JETÉES.

**NOTICE DISPONIBLE AU TÉLÉCHARGEMENT SUR : [WWW.RG-RACING.COM](http://WWW.RG-RACING.COM)**

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



<u>OUTILS REQUIS</u>	<u>VALEURS DE SERRAGE</u>
<ul style="list-style-type: none"> <li>Clé Torx T25</li> </ul>	M4 BOULON = 8Nm M5 BOULON = 12Nm M6 BOULON = 15Nm M8 BOULON = 20Nm M10 BOULON = 40Nm M12 BOULON = 40Nm

### LEGENDE

<b>ARTICLE No.</b>	<b>DESCRIPTION</b>	<b>QTE</b>
ARTICLE 1	SS RAD0072 PROTECTION RADIATEUR	1
ARTICLE 2	100mm MOUSSE AUTOCOLLANTE	8
ARTICLE 3	220mm COLLIERS DE SERRAGE	4

### NOTICE DE MONTAGE

- En commençant du coté droit de la moto, retirez les 5 boulons de carénage illustrés sur les photos 1 à 5 à l'aide d'une clé Torx / douille T25.
- En utilisant le même outil pour toutes les étapes restantes, retirez le boulon maintenant les deux côtés du carénage, comme indiqué sur la photo 6.
- Retirez les 4x boulons de carénage intérieurs inférieurs comme indiqué sur la photo 7, puis les 4x boulons de carénages intérieurs supérieurs comme indiqué sur la photo 8.
- Retirez délicatement le carénage droit, puis répétez les étapes précédentes pour le carénage gauche.
- Retirez les 2x boulons reliant la protection radiateur au refroidisseur d'huile, comme indiqué sur la photo 9.
- Disposez et fixez les bandes de mousse de protection (article 2) sur le cadre intérieur de la protection radiateur (article 1), puis montez la protection sur le radiateur.
- Positionnez les languettes de protection du radiateur entre les points de jonction du radiateur et du refroidisseur d'huile, comme indiqué sur la photo 10, puis fixez-les avec les boulons d'origine.
- Fixez les coins supérieurs de la protection de radiateur en passant un serre-câble (article 3) dans les fentes de fixation supérieures de la protection et en les enroulant autour des points de fixation du radiateur, comme indiqué sur la photo 11.

ISSUE 1 - 14/10/2019 (FB)

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)



## MONTAGEANLEITUNG FÜR SRG0072SS EDELSTAHL KÜHLERSCHUTZ BMW S1000RR 2019-

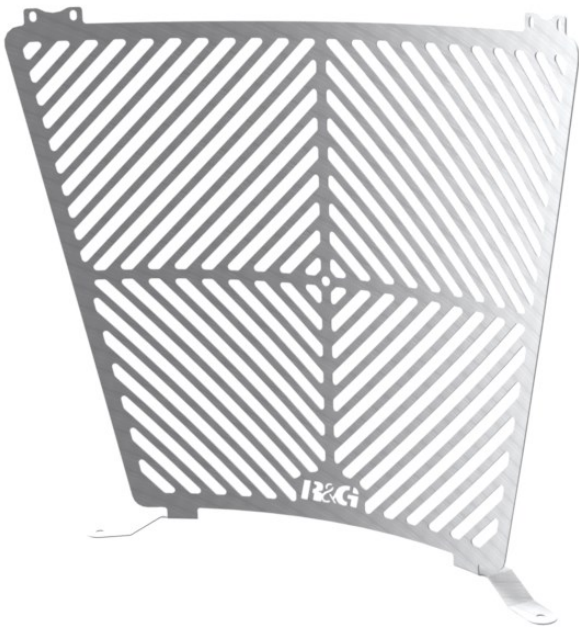


Abbildung A



Abbildung B

### **ALLE KIT-TEILE SIND UNTEN ABGEBILDET UND GEKENNZEICHNET**

DIE ABGEBILDETEN TEILE DIENEN LEDIGLICH ZUR ERKLÄRUNG.

ÜBERPRÜFEN SIE, DASS ALLE TEILE VORHANDEN SIND, BEVOR SIE MIT DER MONTAGE BEGINNEN.

**LESEN SIE DIE MONTAGEANLEITUNG KOMPLETT DURCH, BEVOR SIE ANFANGEN.**

**WENN SIE UNSICHER SIND BEI DER MONTAGE DIESES PRODUKTES, BITTE EINEN UNSERER HÄNDLER KONTAKTIEREN ODER DAS KIT VON EINEM QUALIFIZIERTEN ZWEIRAD-MECHANIKER MONTIEREN LASSEN.**

Die Verpackung der Teile stellt nicht die Reihenfolge der Montage dar.

Hinweis für Kits mit Plastikunterlegscheiben an den Schrauben – Diese Plastik-Unterlegscheiben werden nicht für den Einbau benötigt!

**EINE DIGITALE VERSION DIESER MONTAGEANLEITUNG KANN AUF FOLGENDER SEITE HERUNTERGELADEN WERDEN:**

[www.rg-racing.com](http://www.rg-racing.com)

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)





<b><u>SIE BENÖTIGEN FOLGENDES WERKZEUG</u></b>	<b><u>ALLGEM. ANZUGSDREHMOMENT</u></b>
<ul style="list-style-type: none"> <li>T25 Torx-Schlüssel</li> </ul>	M4 SCHRAUBE = 8Nm M5 SCHRAUBE = 12Nm M6 SCHRAUBE = 15Nm M8 SCHRAUBE = 20Nm M10 SCHRAUBE = 40Nm M12 SCHRAUBE = 40Nm

### **LIEFERUMFANG**

<b>ARTIKEL-NR.</b>	<b>BESCHREIBUNG</b>	<b>MENGE</b>
ARTIKEL 1	SS RAD0072 EDELSTAHL KÜHLERSCHUTZ	1
ARTIKEL 2	100mm SELBSTKLEBENDER SCHAUMSTOFF-STREIFEN	8
ARTIKEL 3	220mm KABELBINDER	4

### **MONTAGEANLEITUNG**

- Beginnen Sie an der rechten Seite des Motorrades und entfernen Sie die 5x Verkleidungsschrauben, die in den Abbildungen 1-5 abgebildet sind mit einem T25 Torx-Schlüssel.
- Benutzen Sie das gleiche Werkzeug für die übrigen Schritte und entfernen Sie die Schraube, die die zwei Seiten der Verkleidung zusammen hält – siehe Abbildung 6.
- Entfernen Sie die 4x untere Verkleidungsschrauben (innen) wie in Abbildung 7 abgebildet, dann die 4x oberen Verkleidungsschrauben (innen) wie in Abbildung 8 abgebildet.
- Entfernen Sie vorsichtig die rechte Seitenverkleidung, dann wiederholen Sie die Schritte, um die linke Seitenverkleidung zu entfernen.
- Entfernen Sie die 2x Schrauben, die den Kühlerschutz am Ölkühler fixieren – siehe Abbildung 9.
- Die selbstklebenden Schaumstoffstreifen (Artikel 2) am inneren Rahmen des Kühlerschutz (Artikel 1) anbringen und an den Kühler ansetzen.
- Positionieren Sie die Laschen des Kühlerschutz zwischen dem Kühler und den Verbindungspunkten für den Ölkühler wie in Abbildung 10 abgebildet, dann mit den Originalschrauben befestigen.
- Die oberen Ecken des Kühlerschutz sichern, indem Sie Kabelbinder (Artikel 3) durch die oberen Sicherungsöffnungen fädeln und diese dann um die Montagepunkte der Kühlers wickeln, wie in Abbildung 11 abgebildet.

AUSGABE 1 - 14/10/2019 (FB)

R&G Racing

Unit 1, Shelleys Lane, East Worldham, Alton, Hampshire GU34 3AQ.

Tel: +44 (0)1420 89007 Fax +44 (0)1420 87301 [www.rg-racing.com](http://www.rg-racing.com) Email: [info@rg-racing.com](mailto:info@rg-racing.com)