





# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### TRIUMPH STREET CUP

#### FENDER ELIMINATOR

- 1 Remove seat from bike
- 2 Remove four stock bolts holding stock fender (picture 1)
- 3 Unplug stock connector attached to ECU (picture 2)
- 4 Install new belly pan using stock bolts and supplied M6 nuts. Start by using rear holes and leaving them loose (picture 3)
- 5 Assemble NRC license plate bracket to tail light with M6x10 bolts and star nuts (picture 4)
- 6 Plug red barrel plate light connectors together
- 7 Slide tail light into position. The bottom bracket should line up with the remaining (2) holes of the belly pan. Use M6 bolts and nuts to secure. (picture 5)
- 8 The top bracket should line up with (2) holes directly behind it. Prior to tightening anything, slide turn signal brackets into position, sandwiching between tail light bracket. (picture 6)
- 9 Tighten all bolts

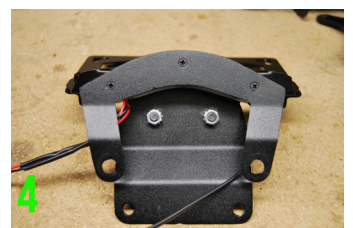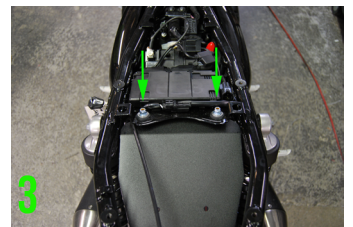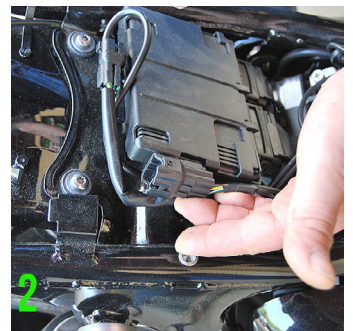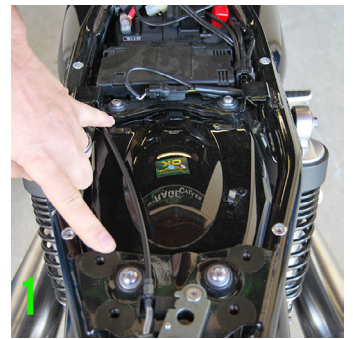

# NEW RAGE CYCLES

## INSTALLATION INSTRUCTIONS

### FENDER ELIMINATOR

- 10 Plug new tail light back into stock connector
- 11 Zip tie any excess wires together
- 12 Put seat back on

