



HONDA VFR800




- **PACKING LIST:**
- **1X DOWN PIPE SET**
- **3X CLAMPS**
- **4X CYLINDER PORT GASKETS**
- **1X CARBON GASKET**
- **6X COLLECTOR SPRINGS**
- **1X SILENCER OF CHOICE WITH STRAP AND RUBBER INSERT**
- **2X SPACERS**
- **MOUNTING HARDWARE**
- **1X TUBE OF SILICON SEALANT**

- **Fitting Instructions**
- We advise that this product is fitted by an experienced motorcycle mechanic.
- Please check packing list before you start.
- Secure motorcycle on level ground using a paddock stand. Recommended!
- Remove existing exhaust. Refer to workshop manual.
- Clean cylinder head ports of old gasket material, dirt and carbon deposits.
- Fit the new cylinder port gasket and the rear left header pipe finger tight.




- Fit the new cylinder port gasket and the rear right header pipe finger tight.

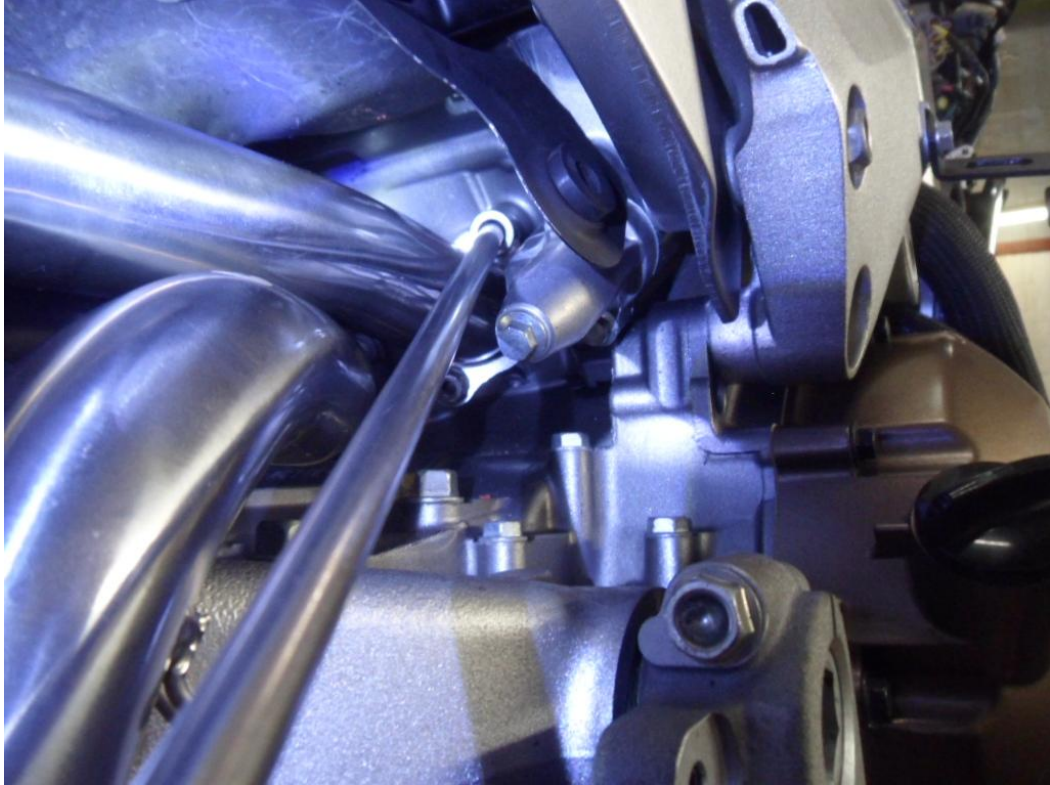

- Attach the mid-pipes and collector.



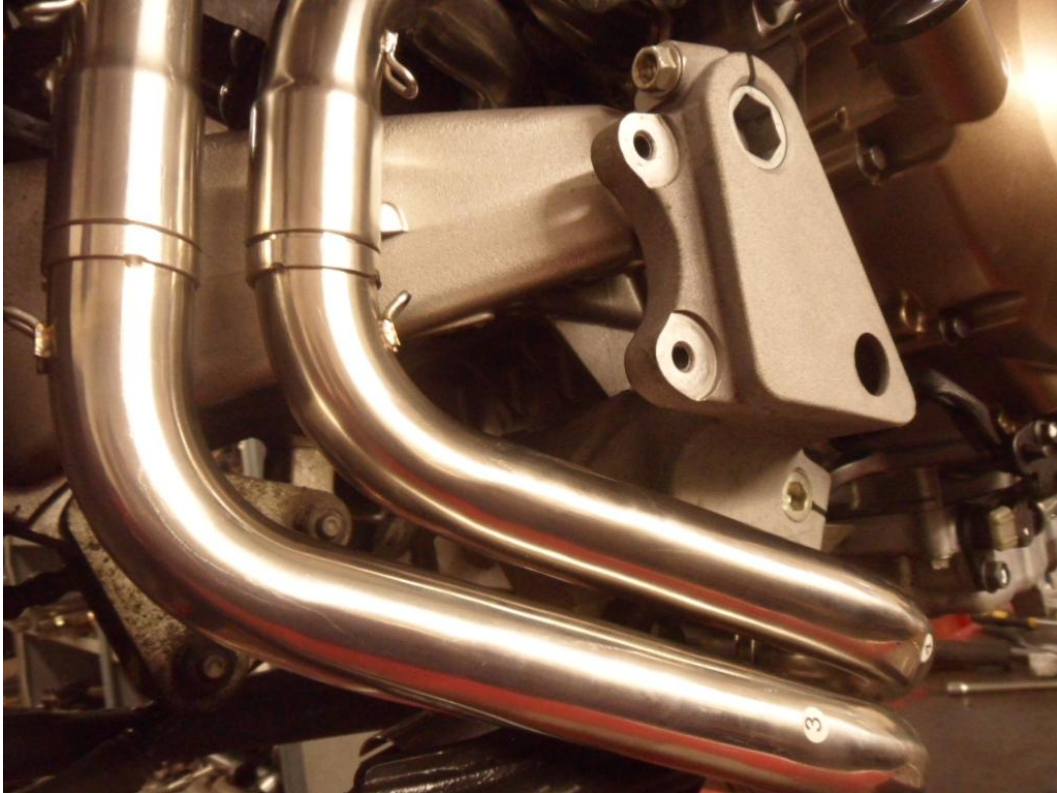


- Fit the new cylinder port gasket and the front left header pipe finger tight.



- Fit the new cylinder port gasket and the front right header pipe finger tight.




- Fit the outlet pipe to the collector.

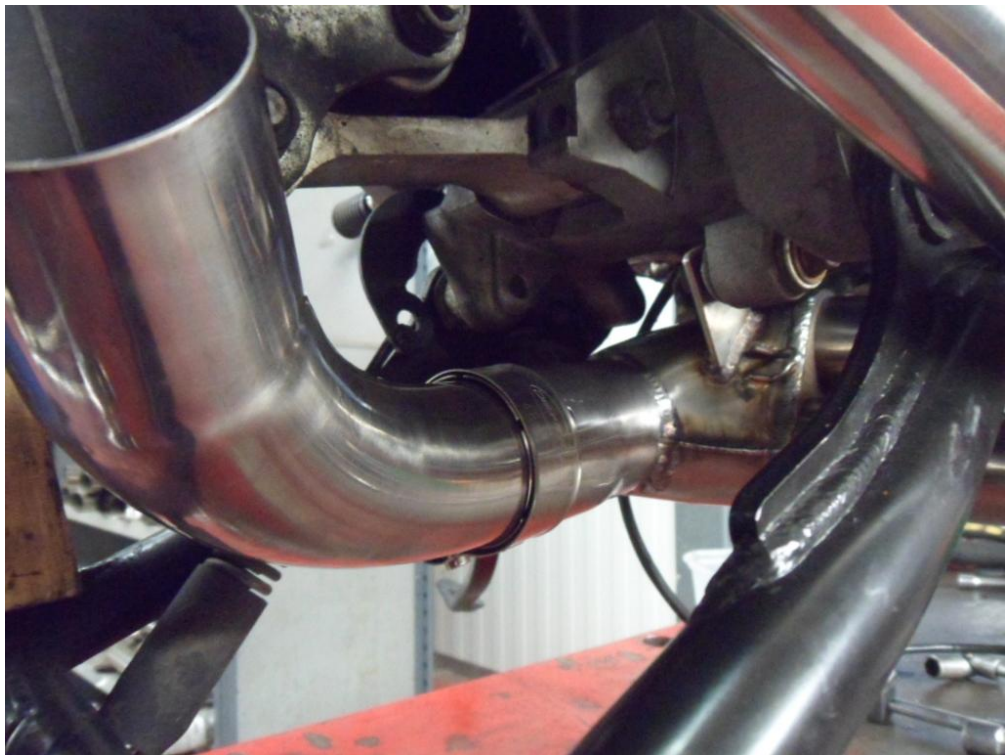

- Fit the link pipe and the silencer and then fit the strap around the silencer and to the frame.



- Starting from the front, working rearwards tighten all clamps and fasteners.
- Fit the collector springs.
- Insert the spacers behind the bracket.

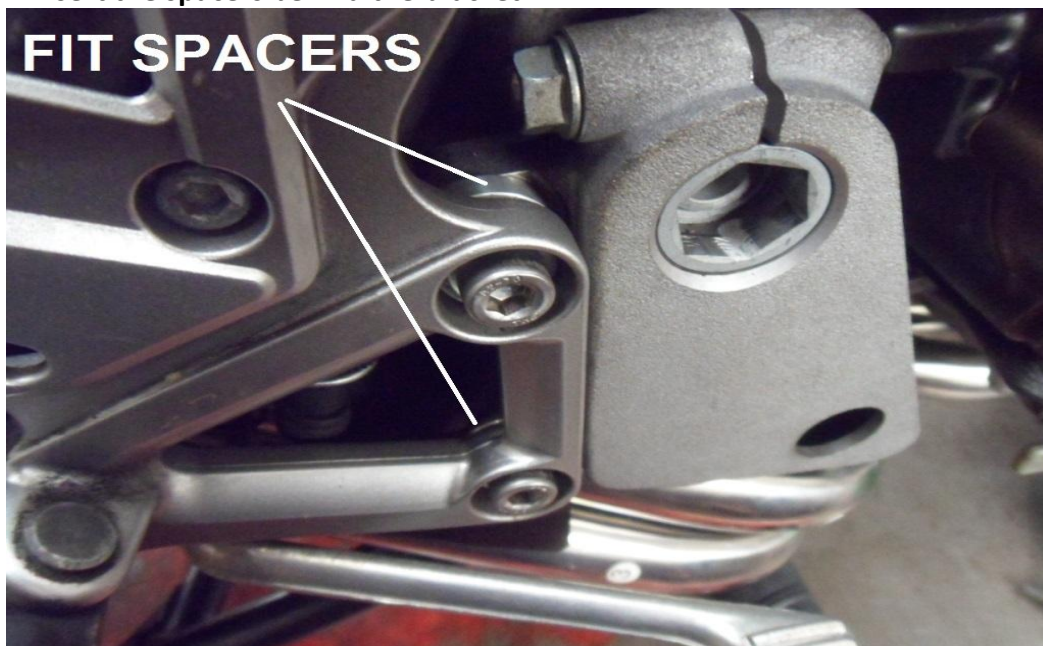

- Start the engine and check for leaks.
- After your first ride out, check all fasteners for tightness, especially the baffle bolt.