


The **LPC-0095** Ultra-thin Circular LED panel delivers up to 340 lumens of light at up to 68 lumens per watt. Using a fraction of the energy used by comparable incandescent lamps, the LPC Series is a direct replacement for most recessed downlights in a 3.5 in. opening. With a wet location rating, this product is ideal for use in many residential, hospitality, and light commercial applications.



### PRODUCT SPECIFICATION

- Lifetime: Designed to last >50,000hours
- Dimming: Dimmable to 1%
- Wet Rating: IP64 (Suitable for Damp Locations)
- Clear Height: 26mm / 1.02"
- Outside Dimensions: 95mm / 3.74" Ø
- Opening Dimensions: 85-90mm / 3.35-3.54" Ø
- Weight: 0.19kgs/0.42lbs
- CRI: > 90 / SMD 2835
- Lumen: 320-340 lm
- Power: 100-240VAC 50/60Hz / 24VDC CV
- Watts: 4.5W / IC Rated
- CCT: 3000 - 6500K in 4 standard options
- View Angle: 120 degree
- Warranty: 7 years

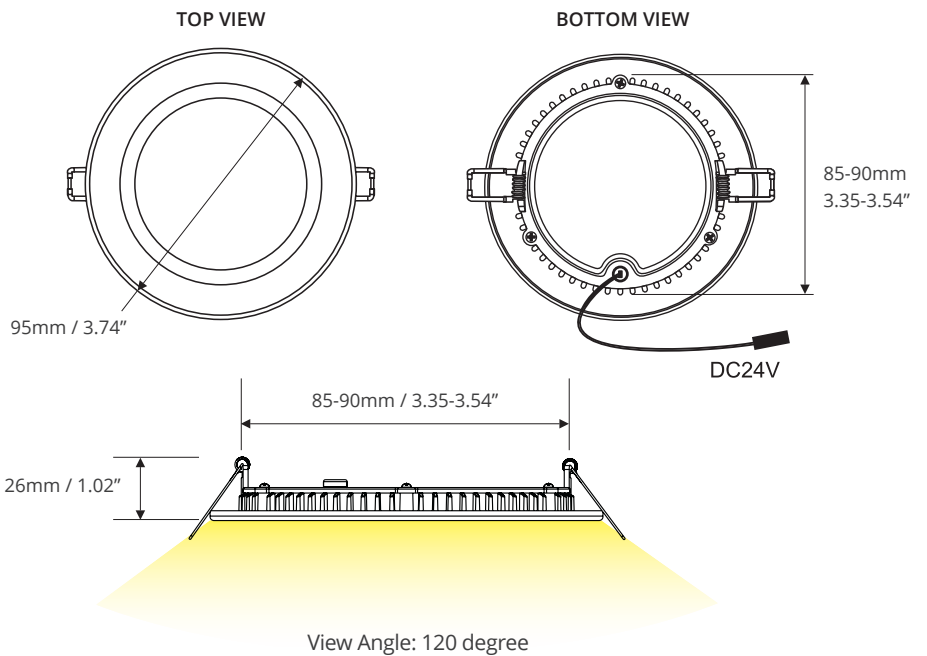

### SPECIFICATIONS / ORDERING CODE MATRIX

Example: LPC-0095-05-3000-W means LPC Series 0095 model, 5 Watt, 3000K, White Frame

Model	Wattage	CCT	Frame Color
LPC-0095	05	3000	W
LPC-0095	5w	3000K - 6500K	W White A Aluminum C Custom

\* requires color sample and sample sign-off prior to order production.  
 \*\* Custom or specific color temp (CCT) available to confirm light matching

Prism One Returns & Warranty Information: [https://prismone.com/returns\\_and\\_warranty.html](https://prismone.com/returns_and_warranty.html)



**PRISM ONE**  
 1133 CROWN PARK CIRCLE  
 WINTER GARDEN, FLORIDA 34787  
 USA

**CONTACT**  
 T: 866.776.7666  
 T: 321.293.1000  
 F: 321.293.1001

**ONLINE**  
 PRISMONE.COM  
 SALES@PRISMONE.COM

REV 190215.1