


VOLTstack[®]

Mobile Series

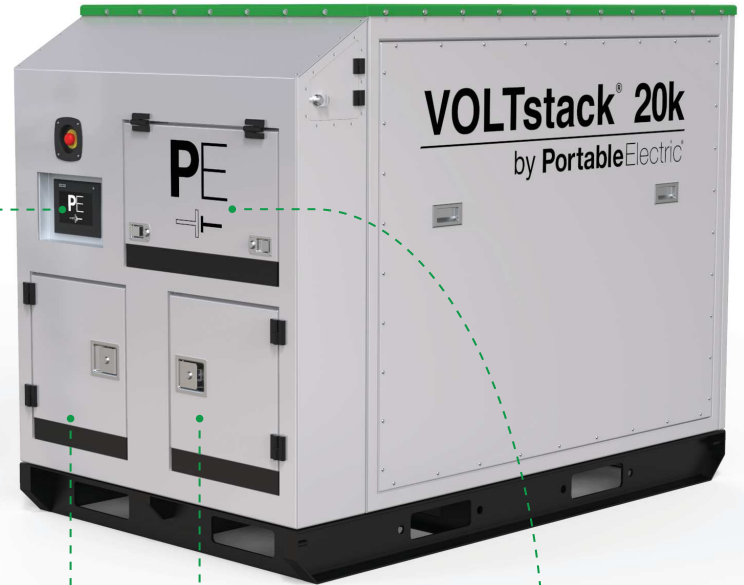

7" Touch Screen

Charging Input Connections


AC Charging
DC Solar Charging

Power Output Industrial Connections

- Camlock
- NEMA
- Bates
- Non-NEMA
- EV Level 2
- EV Level 3
- DC Output
- CEE Form

AC Power Output

Convenience Receptacles up to 32A each



Safety

UL1973 Certified Battery
UL Certified Inverter & Solar MPPT
Special Inspection SPE 1000 CSA

Mechanical Specs

Dimensions: 47" x 79" x 59.2" (W x L x H)
Outdoor IP65 Rated Enclosure

3,780 lbs / 1,714 kg (60 kWh)
4,580 lbs / 2,077 kg (80 kWh)

User Interface

- 7" outdoor-rated LCD touch screen with state of charge, power in/out, operating & charging times
- NeuronOS wireless monitoring platform for real-time data, analytics, & GPS
- Resettable output breakers

SPECIFICATIONS

Zero Emissions. Infinite Possibilities.

VOLTstack[®] Mobile Series



20k 30k Configurations

Output Power 22 kVA / 18 kW 33 kVA / 27 kW

AC Voltage 120/240V split ph 120/208V 3 ph 230V 1 ph 230/400V 3 ph

Energy Storage 60 kWh 80 kWh

AC Charging Max Power 7 kW (30-32A) Household Charge EV L2 Charge

Solar Charging No Solar 4800W 9600W Other

Low Temp Rating -10 C / 14 F -30 C / -22 F

High Temp Rating +40 C / 104 F +50 C / 122 F

Transport Trailer Include Don't Include

Transport Options

