



Project Name: _____

Location: _____

Item #: _____ Qty: _____

Model: _____

COMPACT INDOOR/OUTDOOR REFRIGERATOR

MODEL: MCR5U-0



MCR5U-0


Maxx Ice Indoor/Outdoor compact refrigerator is ideal for residential and commercial environments. Perfect for any indoor or outdoor entertainment space, the stainless steel refrigerator can be free standing or built in and has a storage capacity of up to 5 cubic ft.

FEATURES AND CONSTRUCTION

- Stainless steel door with lock and key set
- Easy to clean, low-maintenance ABS interior
- Energy efficient interior LED lighting - ability to toggle between white and blue light
- 3 metallic wire shelves
- Adjustable leveling feet
- Electronic control panel with LCD digital display
- Equipped with integrated condensate evaporator therefore no drain line connection is needed
- Polyurethane foam insulation provides outstanding thermal regulation and energy efficiency
- Approved for residential & commercial applications

ELECTRIC

120V / 60Hz / 1Ph
International voltage available
6' (2m) NEMA 5-15P cord set included



NEMA 5-15P

TEMPERATURE

Holding temperature 35°F to 40°F (1°C to 5°C)

- Digital control system maintains optimum temperature
- This unit is designed to store pre-chilled product at the ideal serving temperature and is not intended to perform as a pull down refrigerator

3RD PARTY APPROVALS



Intertek

Certified to ANSI NSF 12



Intertek

Certified to ANSI UL 563



DOE 2018 Compliant

MAXX ICE WARRANTY (USA / CANADA)


Contact Maxx Ice for warranty statement at
TechnicalServices@TheLegacyCompanies.com or 877.368.2797




MAXX ICE

COMPACT INDOOR/OUTDOOR REFRIGERATOR


FRONT VIEW

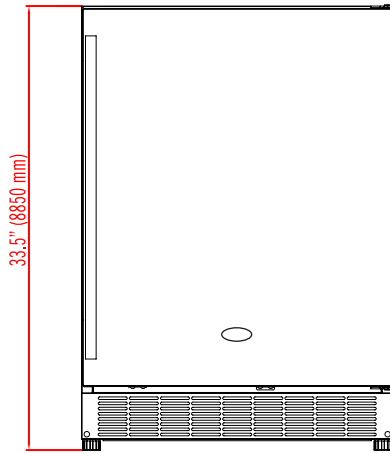

SIDE VIEW

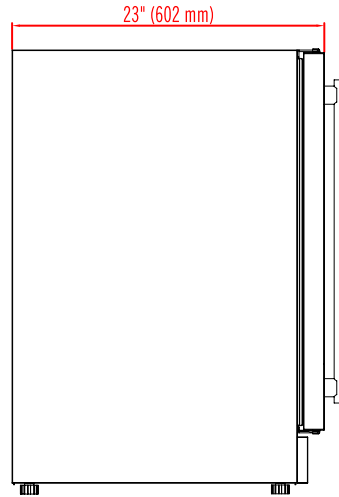

TOP VIEW

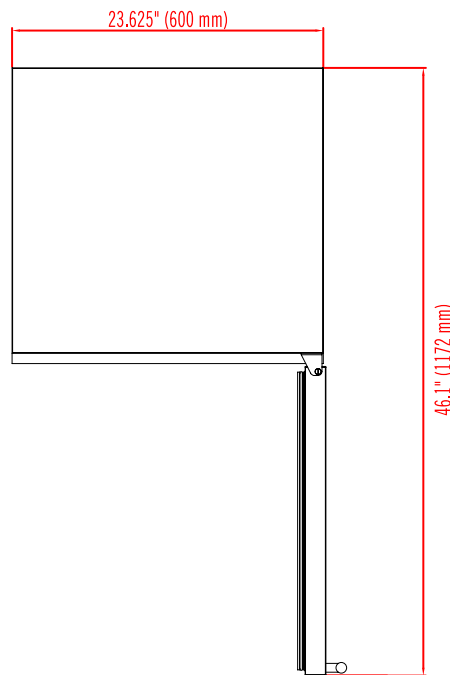

MODEL	EXTERNAL DIMENSIONS	HOLDING TEMPERATURE RANGE	AMP DRAW	DOORS / SHELVES	UNIT WEIGHT	REFRIGERANT AND CHARGE SIZE	ELECTRICAL
MCR5U-0	23.625" x 23" x 33.5" (600 x 584 x 851 mm)	35°F to 40°F (1°C to 5°C)	1.8A	1 / 3	93 lb (42.5 kg)	R-134a 2.2 oz (65.2 g)	115V / 60Hz / 1Ph

INSTALLATION

- A minimum clearance of 1/4" on the sides, 1/2" in the rear and 1" on top is recommended to promote adequate cooling air circulation
- Minimum cutout size for undercounter installation is 24.125" x 33.75"