



USER INSTRUCTIONS FOR QUICK LINKS THAT ARE FITTED ON INDIVIDUAL EQUIPMENT PROVIDING PROTECTION AGAINST FALLS FROM HEIGHTS (EN 362 : 2004) OR WHICH ARE USED IN MOUNTAINEERING AND ROCK CLIMBING (EN 12275 : 2013) PPE REGULATION 2016/425

Quick Links should bear the following marks :*

MAILLON RAPIDE France
EN 362:04/Q & 12275 CE 0082 A.10.01
 ← ... KN → 10⇄KN UIAA

***Key to symbols :**


- MAILLON RAPIDE = registered trademark
- EN 362:04/Q = standard number, reference year and code letter corresponding to the class and equipment & EN 12275 in compliance with standard EN 12275
- CE = in compliance with regulation 2016/425
- 0082 = number of the approved body that carries out manufacture inspections
- A = supplier traceability
- 10 = last two digits of the year of manufacture
- 01 to 99 = equipment model number
- ← ... KN → = major-axis breaking strength in the closed and locked position (load : see chart)
- 10 ⇄ KN = minor-axis breaking strength in the closed and locked position (in kN)
- = this pictogram indicates that the user should refer to the instructions
- UIAA = International climbing & mountaineering federation

- The MAILLON RAPIDE Quick Link is intended to serve as a connection element between components / assembly device for a fall protection system for connecting directly or indirectly to an anchor point (EN362).
- The user must perform before every use visual checks (for corrosion, wearing, deformation), functional checks (of threads, etc.), along with checks for mark legibility. Extreme temperatures and the effects of chemical reagents, cuts and abrasions are all factors that could affect the performance of the equipment. Care should be taken during use, transport and storage. While in use, the nut must be correctly and completely screwed onto the bolt with the appropriate tightening torque : no thread must be showing.
- If a Quick Link fitted on an item of equipment has served its purpose in stopping a fall, it must be replaced by a new Quick Link. If you are in any doubt about the safety of a Quick Link after having checked it, destroy it and replace it with a new one.
- Only persons who are suitably trained and qualified may use the equipment ; furthermore, a rescue plan must be put in place to respond to all emergencies that could arise while the equipment is being used.
- In accordance with standard EN 362, a Quick Link should be employed only for connections that are infrequently opened and closed.
- Users should take account of the length of the Quick Link if it is to be used with a fall-stop system where it will affect the height of the fall (e.g. if it is used with equipment complying with standards EN 355 or EN 360 or EN 353-1/2). Ensure that the device or anchoring point is always correctly positioned and that work is carried out in such a way to reduce the fall height and the risk of falls to a minimum. Check that there is free space beneath the user in order to avoid any collision with obstacles that may be obstructing the fall trajectory.
- Users should ensure that their medical conditions do not affect their safety during normal use of the equipment or in case of an emergency. In case of doubt, users should consult their doctor.
- Maintenance and storage : Quick Links must be stored in a dry place. In case of contact with water, or after cleaning with water and air-drying, the threads should be lightly oiled.
- Any modifications to a Quick Link (or assembly with other components) must be approved by the manufacturer.
- The equipment must not be used beyond its limits (given by the manufacturer and engraved on the product), or in any other situation than that for which it is intended. Only use the connector with equipment complying with applicable European standards. It is recommended that individual Quick Links be used by only one person.
- Check the compatibility of all elements in order to avoid any dangers likely to arise through the use of several items : ensure that no element's safety functions are affected or compromised by the safety functions of any other elements.
- Check that the anchoring point has a minimum strength of 12 kN and allows the Quick Link to be used in compliance with the recommendations of these instructions (particularly regarding the direction of tension) and the breaking loads laid down in the standard. It is recommended that the anchoring point be situated above the user.
- It is recalled that the fall arrest harness is the only body prehension device that is allowed for use in a fall arrest system.
- In case of resale, the Quick Link should be accompanied by these instructions in the language of the destination country.
- The lifetime of a Quick Link is unlimited : only the state of the equipment determines its ability to remain in use.
- The safety of the user is related to maintaining the efficiency and strength of the equipment and its regular inspections. Quick Links should be carefully checked at regular intervals by a qualified individual in strict compliance with the manufacturer's instructions at least once a year. At each inspection, the check must be recorded on the product identification sheet. The data sheet must be kept at each inspection.

Reminder :

Table of tightening torques (Nm) tension

Ø F	TORQUE
7,0	2,5
8,0	3,0
9,0	4,5
10,0	7,0
12,0	9,0

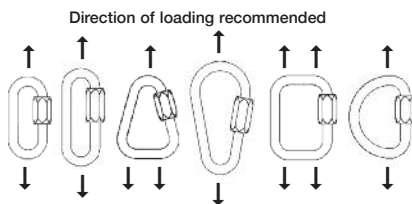

Ø F : diameter of the maillon wire in mm.

Quick Link data sheet		
Model number : 8	Year of manufacture : 7	
Name of user :	Date of purchase :	
Date of first use :	Supplier traceability : 6	
Approved on (date) by : Signature	Comments :	Date of next inspection :
This data sheet is to use with each control and must be kept		

The EU declaration of conformity can be consulted at www.peguet.fr

Manufacturer : PEGUET MAILLON RAPIDE SAS
 12, rue des Buchillons
 CS 60205 Ville La Grand
 74105 ANNEMASSE CEDEX
 FRANCE

Notified body n°0082 carried out a EU-type examination, in charge of production control (Article C2) : SAS APAVE SUDEUROPE
 CS 60193 - 13322 Marseille cedex 16
 FRANCE

December 2018

N°	Description Libellé	Trade Mark Modèle	Material Matière	Breaking load Charge de rupture	Nut opening Ouverture fermoir	Reference Code	Certificate N° EN 12275 : 2013 - Certificate N° EN 362 : 2004 N° Attestation EN 12275 : 2013 - N° Attestation EN 362 : 2004
1	MRNI 07,0 CE	7 N INOX CE	Inox 316 L	45 KN	8,5 mm.	20101 I 01070	0082/141/160/11/ 18/0801
2	MIRGOZ 07,0 CE	7 GO Z CE	Tige FM8 & écrou A 42 FM	25 KN	12,5 mm.	20201 A 02070	0082/141/160/11/ 18/0802
3	MIRGOI 07,0 CE	7 GO INOX CE	Inox 316 L	40 KN	12,5 mm.	20201 I 02070	0082/141/160/11/ 18/0803
4	MRNZ 08,0 CE	8 NZ CE	Tige FM8 & écrou A 42 FM	35 KN	11 mm.	20101 A 02080	0082/141/160/11/ 18/0804
5	MRNI 08,0 CE	8 N INOX CE	Inox 316 L	55 KN	11 mm.	20101 I 01080	0082/141/160/11/ 18/0808
6	MIRGOZ 08,0 CE	8 GO Z CE	Tige FM8 & écrou A 42 FM	32 KN	13,5 mm.	20201 A 02080	0082/141/160/11/ 18/0809
7	MRNZ 09,0 CE	9 NZ CE	Tige FM8 & écrou A 42 FM	45 KN	11 mm.	20101 A 02090	0082/141/160/11/ 18/0810
8	MRNZ 10,0 CE	10 NZ CE	Tige FM8 & écrou A 42 FM	55 KN	12 mm.	20101 A 02100	0082/141/160/11/ 18/0811
9	MRNI 10,0 CE	10 N INOX CE	Inox 316 L	90 KN	12 mm.	20101 I 01100	0082/141/160/11/ 18/0812
10	MRNZIC 10,0 CE	10 N ZICRAL CE	Zicral (7075)	25 KN	12 mm.	20101 Z 10100	0082/141/160/11/ 18/0813
11	MIRGOZ 10,0 CE	10 GO Z CE	Tige FM8 & écrou A 42 FM	50 KN	16 mm.	20201 A 02100	0082/141/160/11/ 18/0814
12	MRDZ 10,0 CE	10 DELTA Z CE	Tige FM8 & écrou A 42 FM	45 KN	12 mm.	20301 A 02100	0082/141/160/11/ 18/0815
13	MRRDZ 10,0 CE	10 1/2 ROND Z CE	Tige FM8 & écrou A 42 FM	45 KN	10 mm.	21001 A 02100	0082/141/160/11/ 18/0816
14	MRRDI 10,0 CE	10 1/2 ROND INOX CE	Inox 316 L	62 KN	10 mm.	21001 I 01100	0082/141/160/11/ 18/0817
15	MRRDZIC 10,0 CE	10 1/2 ROND ZICRAL CE	Zicral (7075)	25 KN	10 mm.	21001 Z 10100	0082/141/160/11/ 18/0818
16	MRPZ 10,0 CE	10 POIRE Z CE	Tige FM8 & écrou A 42 FM	36 KN	20,5 mm.	20401 A 02100	0082/141/160/11/ 18/0819
17	MRCZ 10,0 CE	10 CARRE Z CE	Tige FM8 & écrou A 42 FM	45 KN	12 mm.	20701 A 02100	0082/141/160/11/ 18/0820
18	MRDZ 12,0 CE	12 DELTA Z CE	Tige FM8 & écrou A 42 FM	55 KN	15 mm.	20301 A 02120	0082/141/160/11/ 18/0821
19	MRPZ 12,0 CE	12 POIRE Z CE	Tige FM8 & écrou A 42 FM	44 KN	23,5 mm.	20401 A 02120	0082/141/160/11/ 18/0822
20	MRDI 07,0 CE	7 DELTA INOX CE	Inox 316 L	31 KN	8,5 mm.	20301 I 01070	0082/141/160/11/ 18/0823
21	MRDZ 08,0 CE	8 DELTA Z CE	Tige FM8 & écrou A 42 FM	27 KN	10 mm.	20301 A 02080	0082/141/160/11/ 18/0824
22	MRTWISTGOZ 08,0 CE	8 GO Z TWIST CE	Tige FM8 & écrou A 42 FM	32 KN	11 mm.	20202 A 02080	0082/141/160/11/ 18/0825



Unique Identifier:

Post 2018 Péguet has added an additional code to assist user traceability.

A specific laser marking made on the nut has been added to the existing markings, giving the user an additional option for product inspections. Péguet maintains no data on this code, it is purely for end users.

This option is exclusive to PPE certified Maillon Rapide quick links - EN362/ EN12275 Standards.



Standard Symbols:

Maillon Rapide France: only genuine Maillon have this printed. 1

- ↔ Major Axis 2
- ↑ Minor Axis 3
- EN Standards Compliance 4
- A.##.## Serial Number/Date of Manufacture 5
- A= supplier trace 6
- ##= first set = year of manufacture (last 2 digits of year) 7
- ##= second set = model number (1-99) 8

