

VTH1560BW



Technical Specification

Indoor Monitor	VTH1560BW
System	
Main Processor	Embedded Micro Process
Operation System	Embedded LINUX OS
Video	
Video Compression	H.264
Audio	
Audio Compression	G.711
Audio Input	All-direction Microphone
Audio Output	Built-in Loudspeaker
Bidirectional Talk	Support Dual-way Bidirectional talk

Application

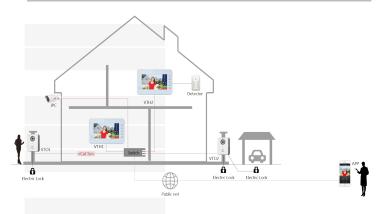

Features

- HD CMOS camera
- · 7-inch capacitive touch screen, resolution 800×480
- · IPC surveillance
- · Alarm integration
- · 2-Door control
- \cdot Remote intercom with mobile APP

























Display

LCD Screen	7" 800x480, Capacitive
Operation Mode	
Input	Touch buttons
Interface	
Alarm In	8
Network	
Ethernet	10M/100Mbps Self-adaptive
Network Protocol	TCP/IP
General	
Memory Slot	Micro SD embedded, 4G
Installation	Flush
Power	DC 12V, or supply directly by VTNS1060A
Power Consumption	Standby ≤1.5W,work≤7W
Working Temperature	-10°C~+55°C
Relative Humidity	10%~90%RH
Dimensions	221.2mm×154.3mm×24.2mm