


# Wireless acquisition and monitoring of measured temperature, humidity and voltage data

Reference

## Integration control by PC of dispersive located emitters

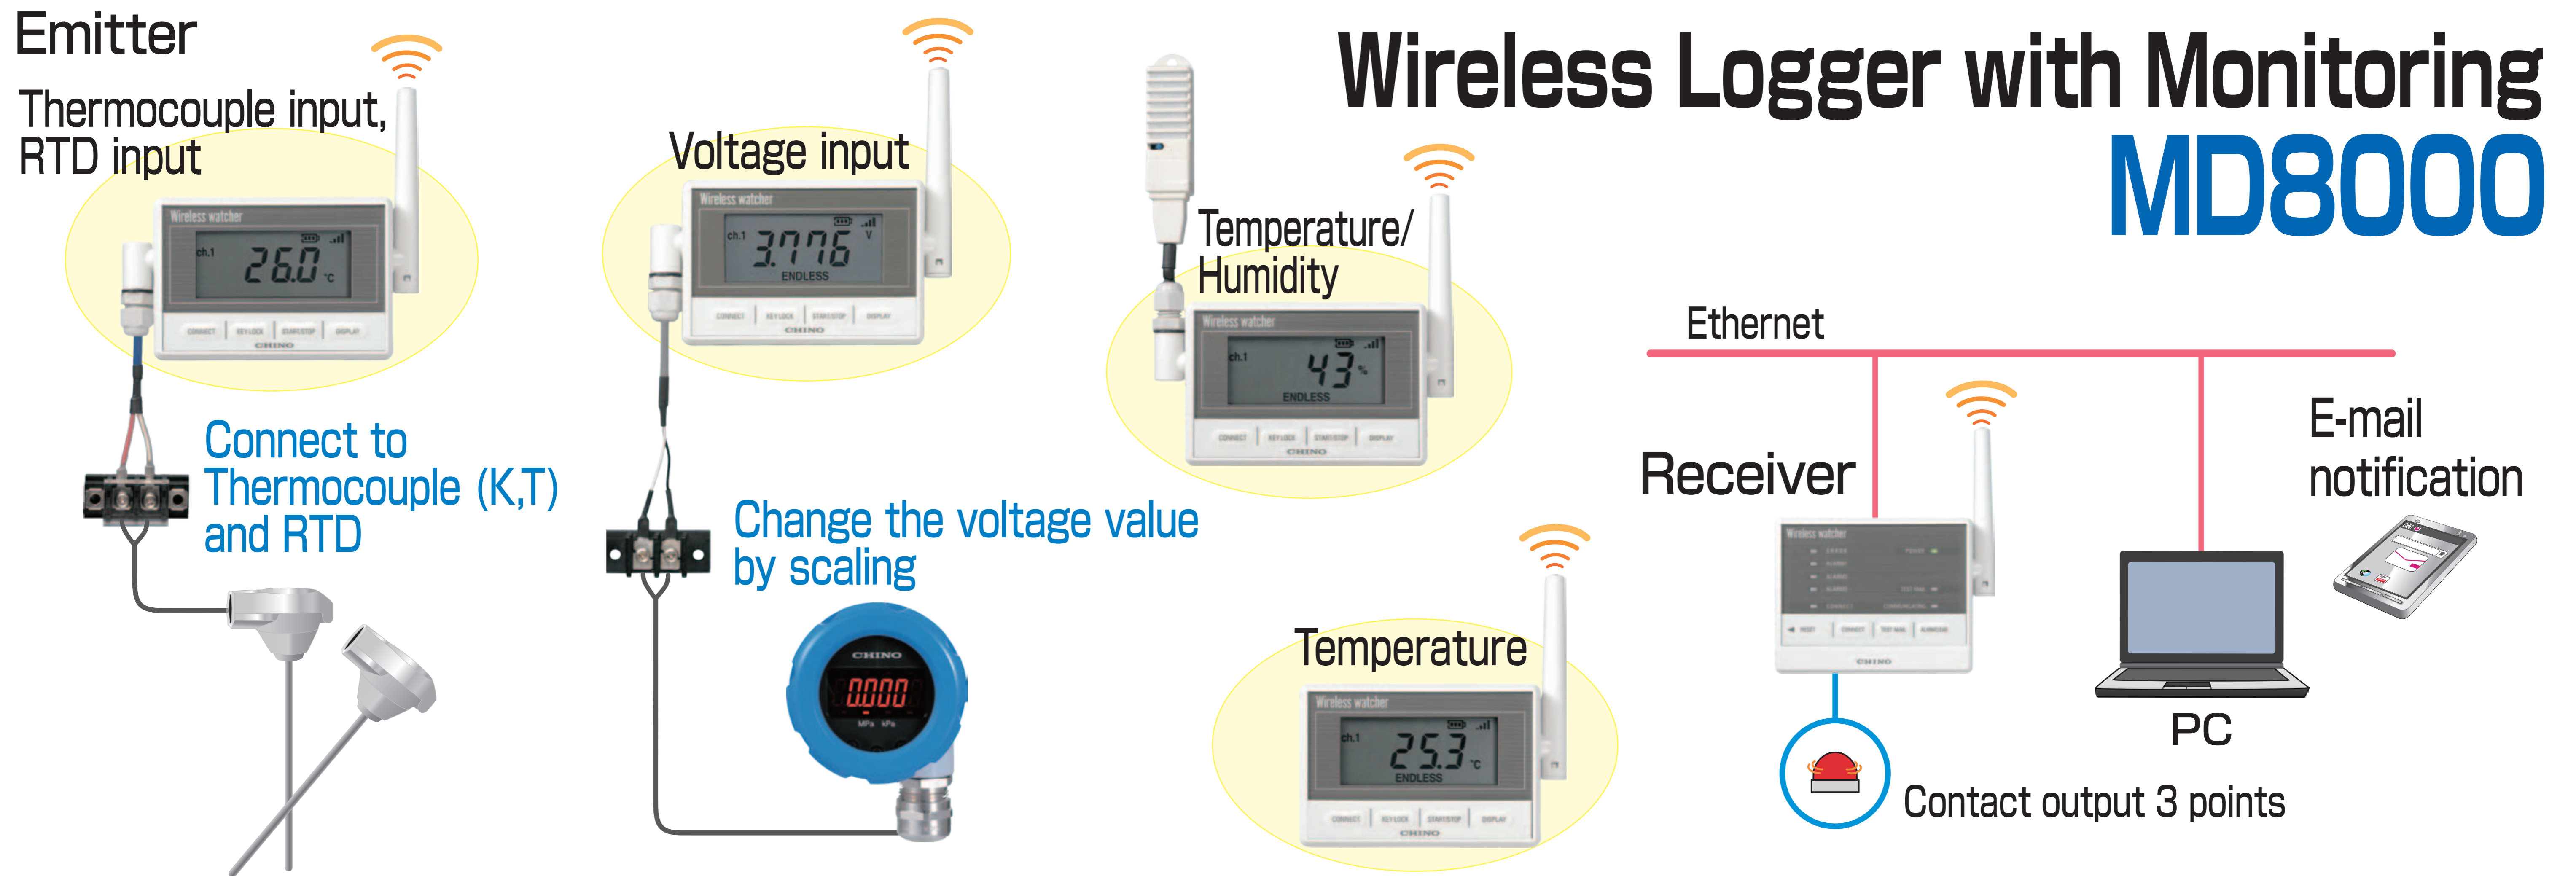

- Prepare Ethernet type which can connect max. 360 emitters (6 receivers) and USB model that of max. 60 emitters (1 receiver).
- Communication distance: Outdoor 400m, Indoor 100m (sight distance), multiples 6 stages is repeated.
- Part1 1 compliance security function software available