






knightgroup.co.nz

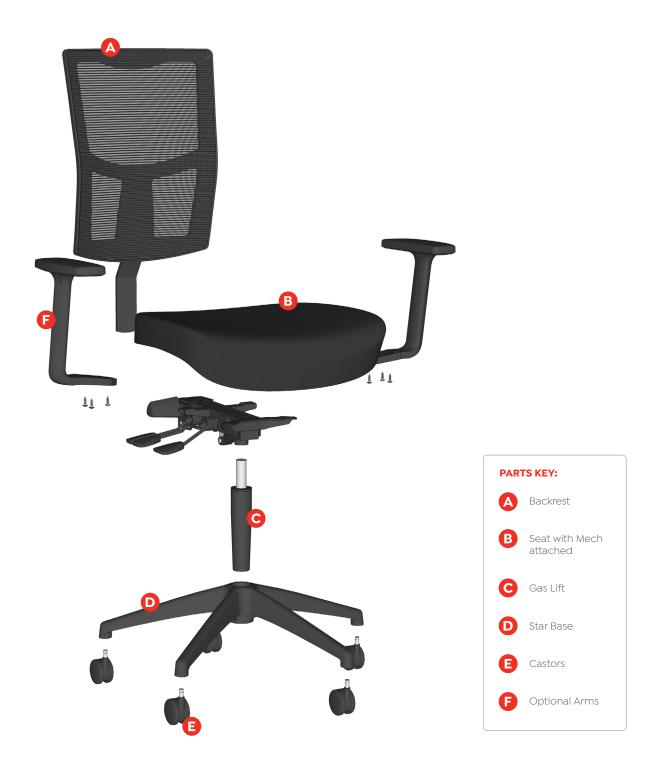

Warning: Failure to follow these assembly instructions can result in product failure, personal injury or property damage.



Step 1

Place chair base upright on floor, stabilizing it so it does not move or slide. Insert gas lift cylinder into hole through chair base.



Step 2

Attach the optional arms using the screws provided.



Step 3

Remove cap from top of gas lift and carefully place seat assembly onto gas lift cylinder, fitting the cylinder into the hole in bottom of seat mechanism. Press down firmly.

Step 4

Place the chair back into the seat mechanism, and tighten knob at the desired height. Before making any other adjustments, sit firmly on the chair to complete assembly.





