



*PE 150*

**4 Channel Wallmount Pay Center**





# PE 150

## PayEnergy Wall mount PayCenter PE 150

### Technical Data

### Main Features

4 Channel Pay station  
payment Processing for charging Four cars  
simultaneously  
Intuitive usage using 7" touch screen  
Powered by Nayax VPOS Touch allowing  
complete telemetry and cashless solution  
Accepts all cashless payments methods

- Debit and Credit Cards
- Mobile, NFC Payments
- Prepaid cards and Closed environment solutions
- Swipe, Contact and Contactless





# PE 150

## Electrical data

**Input Voltage:** 110 VAC, Single phase

**Output :** 4 EV Charger Channel

## Environmental

Approved for both Indoor & Outdoor installations.

Operating temperature: (-25°C) to (+55°C)

Non-Operating temperature: (-30°C) to (+70°C)

Humidity: Up to 100% non-condensing  
IP55, weather and water proof

## Supported Payment Schemes

Contact Card: EMV Level 1 + Level 2 - Certified

Contactless: EMV Level 1 - Certified

Contactless: EMV Level 2:

Visa PayWave EMV + Mag Stripe

MasterCard PayPass EMV + Mag Stripe

Magnetic Stripe Card: Tracks 1,2,3 - JIS II

Other Cards Supported: NFC, MIFARE,

HID-iClass, FeliCa

## Safety and Certification:

UL Listed

Over power protection

## Dimensions / Weight


WxHxD: 8 x 16 x 14 inches

Weight: 26 lbs



## Panel Feature

please process the Payment and Select a Station to start the Charging

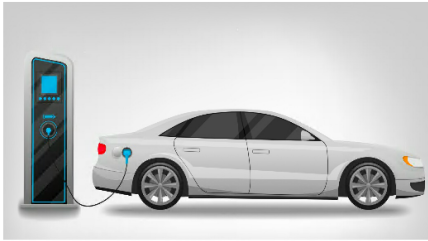

PAID \$10


Email Receipt

- Customized Panel Design and pricing
- Charger Indication Status
- Comparison options
- Marketing and Advertisement
- Low cost
- Fully assembled Box, easy & ready to install

Station 1	Station 2	Station 3	Station 4
Station Available	Paid Energy 40 KWH Delivered 15.1 KWH	Charger Not Available	Charger Reserved
Start Charging			

## Analytics Portal

- Advanced analytical tool that shows the big picture
- Drill down to individual transactions, real-time Charging usage & rates
- Comparison options
- Design and schedule Business reports to a mailing list

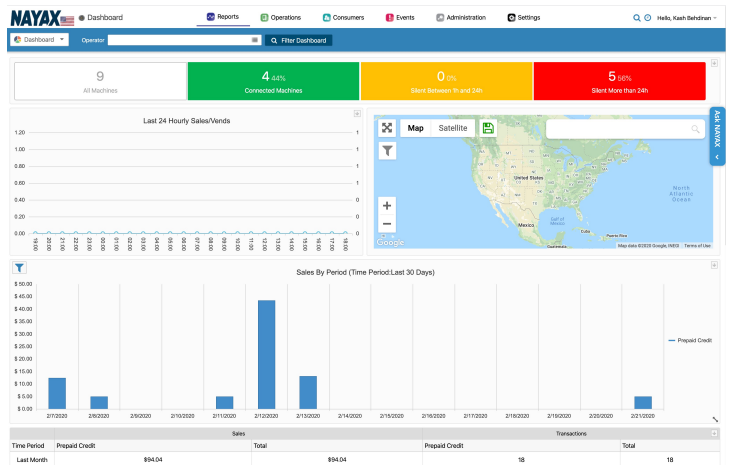

Real Time Reporting	Link to social media	E-receipt	Voice interaction	Choose the displayed language	Instant refund





### Web Based Platform

Access your machines from anywhere in the world directly through your browser.



**Customizable user permissions and event log** User permissions allow you to control who has access to platform resources including devices, data, and company info. The User Event Log tracks logins, connection info, billing modifications, and many other activities for an accurate account history.



### Easily log, monitor and share data with the PayEnergy Platform

Let the PayEnergy platform log and monitor your data. Add cloud logging to your system to have data readily available anytime or anywhere!



### PayEnergy Cloud on the Go

with Mobile VPN The info you need is at your fingertips with iOS and Android apps. From your smartphone easily monitor the status of installed Chargers, connected Chargers and status of charging

## Remote Access & Data Solution

### Track system performance with easy cloud data




PayEnergy makes it easy to connect to your Charger or system remotely.

Whether you prefer to connect via your Windows computer, or if you need access on the go with mobile devices, Pay Energy has the secure connection option for you.

And don't forget the payEnergy platform allows for unlimited users, unlimited concurrent client connections and unlimited mobile connections so you can grant access to anyone you choose without limitations.

Remote access adds value to your bids and can be used as a service warranty revenue stream.

With Payenergy Platform you get the options you need...for less

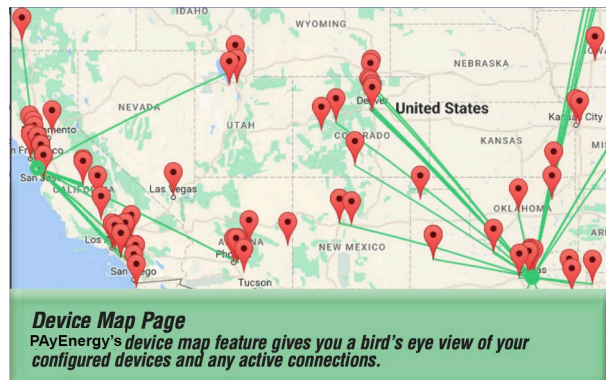



# Energy Management and Monitoring

## PE 150/ E

### Technical Data



## Main Features

### Energy management

- Demand Monitoring
- Up to 2 Channel Current, Energy Monitoring
- Charger On / OFF Control Based on Demand
- Energy Consumption Monitoring
- Charger ON /OFF Monitoring and Remote Control
- Easy Installation and compatible with all Payenergy pay centers
- Cloud Storage of data





		PE-200 EV Charger Series		PE-200 EV Charger Series With Energy Management	
Model Name		PE150-W	PE150-L	PE150- WE	PE150- LE
Input	Input Rating	110Vac			
	Frequency	60 hz			
	Input Current	2A			
Output		4 EV Charger			
Communication		WIFI	LTE	WIFI	LTE
Operating Temperature -		22°F~122°F(-30°C~50°C)			
Humidity		Max. 95% RH			
IP Level		Ip 55			
Dimension(WxDxH)		8" * 16" * 14"			
Multiple Protection		Over current, Under voltage, Over voltage, Residual current, Surge protection,			
Certificate		UL508A			
Energy Management		None		Power Measurement and Monitoring	





## Mechanical Drawing

