

Pay Energy 4 Channel Pay Center PE 101-4W/P Wall Mount /Pedestal Technical Data



Main Features

4 Channel Pay station
payment Processing for charging four cars simultaneously
Intuitive usage using 4" touch screen
Powered by Nayax VPOS Touch allowing complete telemetry and cashless solution
Accepts all cashless payments methods

- Debit and Credit Cards
- Mobile, NFC Payments
- Prepaid cards and Closed environment solutions
- Swipe, Contact and Contactless



Electrical data

Input Voltage: 110-250 VAC, Single phase
Output : 4 EV Charger Channel

Environmental

Approved for both Indoor & Outdoor installations.
Operating temperature: (-25°C) to (+55°C)
Non-Operating temperature: (-30°C) to (+70°C)
Humidity: Up to 100% non-condensing
IP55, weather and water proof

Supported Payment Schemes

Contact Card: EMV Level 1 + Level 2 - Certified
Contactless: EMV Level 1 - Certified
Contactless: EMV Level 2:
Visa PayWave EMV + Mag Stripe
MasterCard PayPass EMV + Mag Stripe
Magnetic Stripe Card: Tracks 1,2,3 - JIS II
Other Cards Supported: NFC, MIFARE, HID-iClass, FeliCa

Safety and Certification:

UL Listed
Over power protection

Dimensions / Weight


WxHxD: 6 x 16 x 14 inches
Weight: 20 lbs



PAYENERGY

Ideal Energy Management System

Pay Energy 4 Channel Pay Center PE 101-4W/P Wall Mount /Pedestal Features:

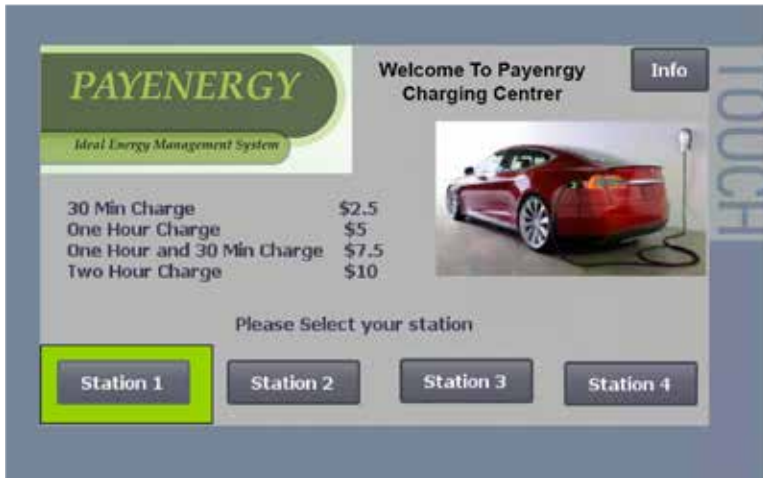


Panel Feature

- Customized Panel Design and pricing
- Charger Indication Status
- Comparison options
- Marketing and Advertisement
- Low cost
- Fully assembled Box, easy & ready to install

Analytics Portal

- Advanced analytical tool that shows the big picture
- Drill down to individual transactions, real-time Charging usage & rates
- Comparison options
- Design and schedule Business reports to a mailing list

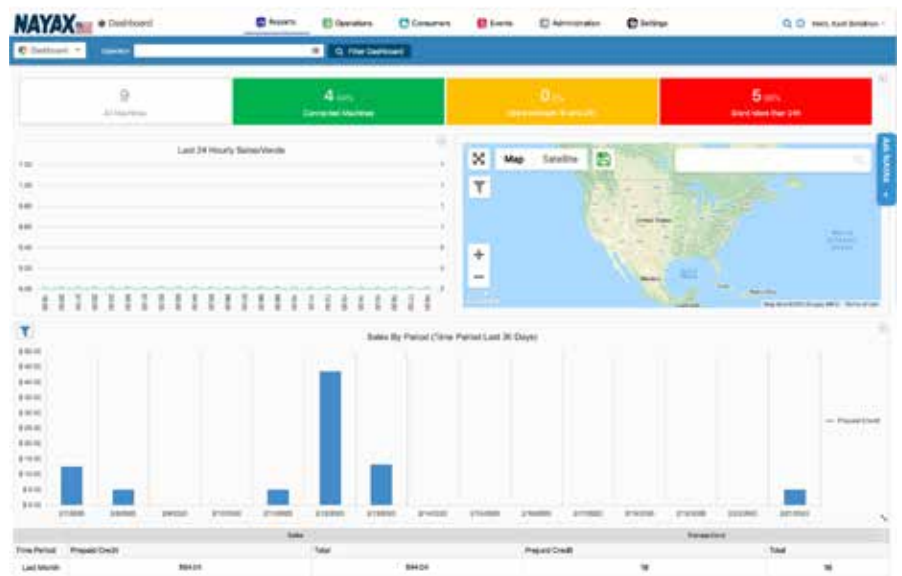

PayEnergy, 24303 Walnut St. Suit C, Newhall CA91321, Phone 661-330-4918, Fax 661-554-0768

www.payenergy.com


email: info@payenergy.com

PAYENERGY

Ideal Energy Management System



Pay Energy 4 Channel Pay Center PE 101-4W/P Wall Mount/Pedestal Features:

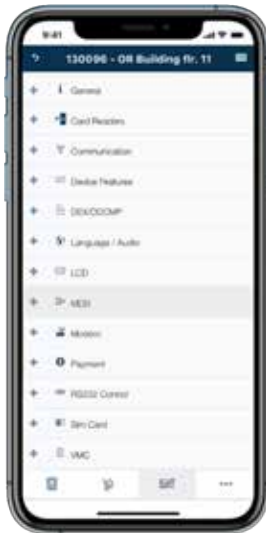

- Compatible with all smartphones and tablets
- Intuitive dashboard
- Manage logic alert thresholds
- Integrate into 3rd party utility Demand Response Management System (DRMS)
- Plug and Play Cellular networked solutions
- Integrated universal reader for allowing open cashless payment solutions
- Easy service - modular design
- Reporting: usage, accounting, billing and machine monitoring
- delivered monthly to registered users
- OTA software updates
- Physical advertising space



PAYENERGY

Ideal Energy Management System

Pay Energy 8 Channel Pay Center PE 201-8Y_W/P Wall Mount/Pedestal Technical Data

Main Features

8 Channel Pay station
payment Processing for charging eight cars
simultaneously
Intuitive usage using 7" touch screen
Powered by Nayax VPOS Touch allowing
complete telemetry and cashless solution
Accepts all cashless payments methods

- Debit and Credit Cards
- Mobile, NFC Payments
- Prepaid cards and Closed environment solutions
- Swipe, Contact and Contactless



Electrical data

Input Voltage: 110-250 VAC, Single phase

Output : 4 EV Charger Channel

Environmental

Approved for both Indoor & Outdoor installations.

Operating temperature: (-25°C) to (+55°C)

Non-Operating temperature: (-30°C) to (+70°C)

Humidity: Up to 100% non-condensing
IP55, weather and water proof

Supported Payment Schemes

Contact Card: EMV Level 1 + Level 2 - Certified

Contactless: EMV Level 1 - Certified

Contactless: EMV Level 2:

Visa PayWave EMV + Mag Stripe

MasterCard PayPass EMV + Mag Stripe

Magnetic Stripe Card: Tracks 1,2,3 - JIS II

Other Cards Supported: NFC, MIFARE, HID-iClass, FeliCa

Safety and Certification:

UL Listed

Over power protection

Dimensions / Weight

WxHxD: 12 x 12 x 19 inches

Weight: 40 lbs



PayEnergy, 24303 Walnut St. Suit C, Newhall CA91321, Phone 661-330-4918, Fax 661-554-0768

www.payenergy.com

email: info@payenergy.com

PAYENERGY


Ideal Energy Management System



Pay Energy 8 Channel PE 201-8Y_W/P Wall Mount/Pedestal Features

Panel Feature

- Customized Panel Design and pricing
- 8 Channel Control
- Charger Indication Status
- Comparison options
- Marketing and Advertisement
- Low cost
- Fully assembled Box, easy & ready to install

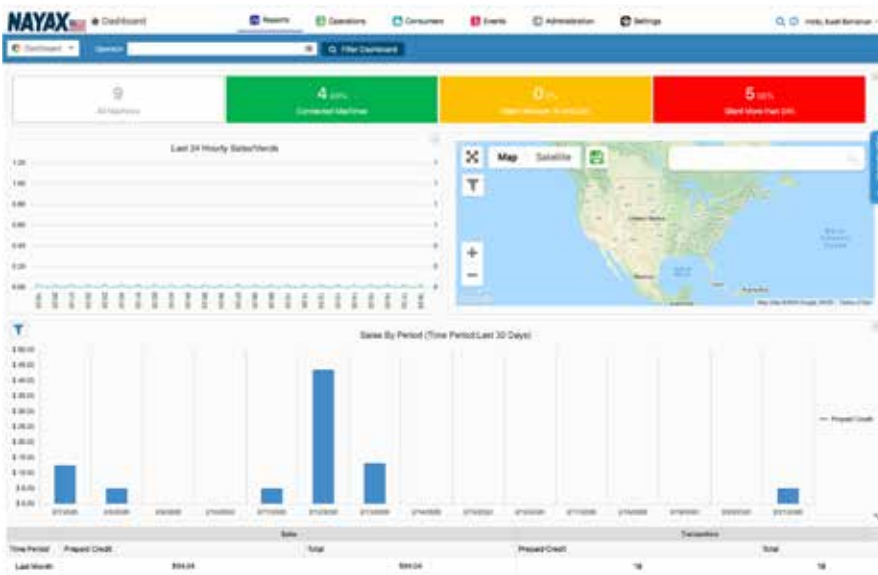

Analytics Portal

- Advanced analytical tool that shows the big picture
- Drill down to individual transactions, real-time Charging usage & rates
- Comparison options
- Design and schedule Business reports to a mailing list




PAYENERGY

Ideal Energy Management System



Pay Energy 4 Channel Pay Center PE 201-8Y_W/P Wall Mount/Pedestal Features:

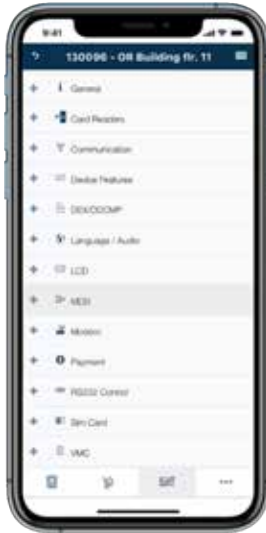


- Compatible with all smartphones and tablets
- Intuitive dashboard
- Manage logic alert thresholds
- Integrate into 3rd party utility Demand Response Management System (DRMS)
- Plug and Play Cellular networked solutions
- Integrated universal reader for allowing open cashless payment solutions
- Easy service - modular design
- Reporting: usage, accounting, billing and machine monitoring
- delivered monthly to registered users
- OTA software updates
- Physical advertising space



PAYENERGY

Ideal Energy Management System

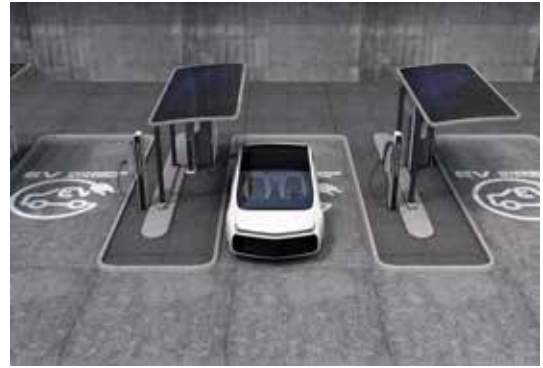

Pay Energy 4 Channel Junction Box

PE 203-4J

Technical Data

Main Features

4 Channel Junction Box
Drive up to four 32 Amp Charger

- Features a stylish, modern design that safely houses more components in a smaller space
- light grey over an industry exclusive electrophoretic dip-coat powder paint
- Easy Installation of mounting panel



Electrical data

Input Voltage: 220 VAC, 160 Amp Dual phase

Output : 4 EV Charger , 32 Amp

Environmental

Approved for both Indoor & Outdoor installations.

Operating temperature: (-25°C) to (+55°C)
Non-Operating temperature: (-30°C) to (+70°C)

Humidity: Up to 100% non-condensing
Type 3R, weather and water proof

Safety and Certification:

UL Listed

Over power protection

Dimensions / Weight

WxHxD: 6 x 16 x 14 inches

Weight: 150 lbs

PAYENERGY

Ideal Energy Management System



Energy Management and Monitoring

PE 005-EMV -QXX

Technical Data

Main Features

Energy management

- Demand Monitoring
- Up to 4 Channel Current, Energy Monitoring
- Charger On / OFF Control Based on Demand
- Energy Consumption Monitoring
- Charger ON /OFF Monitoring and Remote Control
- Easy Installation and compatible with all Payenergy pay centers
- Cloud Storage of data



Electrical data

Input Voltage: 110-250 VAC, Single phase

Environmental

Approved for both Indoor & Outdoor installations.

Operating temperature: (-25°C) to (+55°C)

Non-Operating temperature: (-30°C) to (+70°C)

Humidity: Up to 100% non-condensing
Type 3R, weather and water proof

Safety and Certification:

UL Listed

Over power protection

Dimensions / Weight

WxHxD: 6 x 16 x 14 inches


Weight: 150 lbs

PAYENERGY

Ideal Energy Management System



Energy Management and Monitoring PE 005-EMV

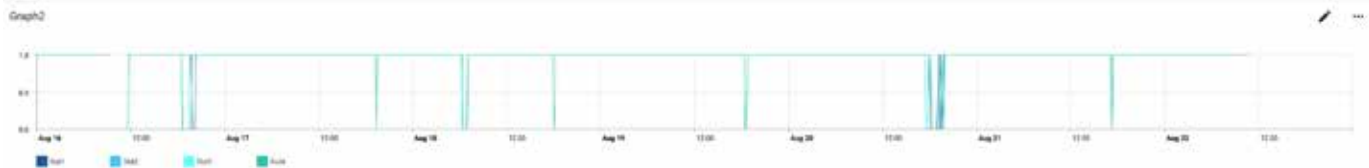

PAYENERGY

Ideal Energy Management System



PayEnergy, 24303 Walnut St. Suit C, Newhall CA91321, Phone 661-330-4918, Fax 661-554-0768

www.payenergy.com

email: info@payenergy.com