

GLASSWARE

SIBATA Scientific Technology LTD. is a highly respected manufacturer of Laboratory Glassware. This Japanese company was established and started producing glassware in 1921. They have been producing borosilicate glassware since 1940. VEE GEE sells SIBATA glassware due to its high quality and affordable price.

VEE GEE branded glassware is an economical choice made to ASTM standards.

Glass Beakers

These low-form Griffin beakers feature easy-pour spouts and permanent white graduations

- Uniform wall thickness ideal for heating applications
- Made from high-quality borosilicate tubing with a low coefficient of expansion
- Graduation accuracy ±5% of full capacity

SIBATA Beakers

SIBATA BEAKER	S					
Cat. No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.
10020-50A	50	20 to 50	10	1.8 x 2.4	46 x 60	10
10020-100A	100	20 to 100	10	2.2 x 2.8	55 x 70	10
10020-200A	200	50 to 200	25	2.6 x 3.5	67 x 89	10
10020-300A	300	50 to 300	50	3 x 4	78 x 103	10
10020-500A	500	100 to 500	50	3.5 x 4.3	90 x 120	10
10020-1000A	1000	200 to 1000	100	4.3 x 5.9	110 x 150	6
10020-2000	2000	250 to 2000	250	5.3 x 7.9	135 x 200	1
10020-3000	3000	500 to 3000	250	6. x 8.9	153 x 225	1



VEE GEE Beakers

- Beakers are double-graduated metric
- Meet ASTM E-960 Type I Specifications for Classification, Design, Capacity & Dimensions and Markings

VEE GEE BEAKERS										
Cat. No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.			
20229-20	20	5 to 15	5	1.7 x 1.8	32 x 45	12	48			
20229-3000	3000	250 to 2500	125	5.9 x 8.3	149 x 212	1	6			

Glass Burets

Used to accurately dispense a liquid, for example in a manual titration

- Designed "To Deliver"
- Made from high-quality borosilicate tubing with a low coefficient of expansion
- Feature durable, permanent markings; fine, sharp lines; and large easy-to-read numbers
- Supplied with PTFE stopcocks to eliminate freezing and lubricant contamination
- Meet ASTM E-287 Class A Specifications



Durable, permanent markings



PTFE stopcock

SIBATA Burets

SIBATA BUF	SIBATA BURETS												
Cat. No.	Capacity	Graduation	Tolerance	Stopcock	Approx. O.D.	Approx. O.D. x	Pack	Case					
	(mL)	Interval (mL)	(±mL)	Bore (in/mm)	x Height (in)	Height (mm)	Qty.	Qty.					
21310-10	10	0.05	0.02	0.2 / 4	0.4 x 20	9.1 x 570	1	20					
21310-25	25	0.10	0.03	0.2 / 4	0.4 x 25.2	11 x 640	1	20					
21310-50	50	0.10	0.05	0.2 / 4	0.5 x 33	12.6 x 840	1	25					

VEE GEE Burets

VEE GEE BURETS											
Cat. No.	Capacity	Graduation	Tolerance	Stopcock	Approx. O.D.	Approx. O.D. x	Pack	Case			
	(mL)	Interval (mL)	(±mL)	Bore (in/mm)	x Height (in)	Height (mm)	Qty.	Qty.			
20114-50	50	0.10	0.05	0.08 / 2	0.5 x 30	13 x 758	1	24			
20114-100	100	0.20	0.10	0.08 / 2	0.7 x 30.5	17 x 775	1	24			



Separatory Funnels

Feature smooth tooled tips, large white block letters, and large marking squares

- Supplied with PTFE stopcocks to eliminate freezing and lubricant contamination
- Made from high-quality borosilicate tubing with a low coefficient of expansion

SIBATA Separatory Funnels with Stopper - Squibb Style

SIBATA SEPAI	SIBATA SEPARATORY FUNNELS WITH STOPPERS - SQUIBB STYLE												
Cat. No.	Capacity (mL)	Stopper No.	Stopcock Plug Size	Approx. O.D. x Stem Length (in)	Approx. O.D. x Stem Length (mm)	Approx. Total Length (in/mm)	Pack Qty.	Case Qty.					
1426T-300	300	24/40	4	0.4 x 2.8	10 x 70	15.4 / 390	1	6					
1426T-500	500	24/40	4	0.4 x 2.8	10 x 70	17 / 430	1	6					
1426T-1000	1000	29/42	6	0.5 x 3.1	12 x 80	19.3 / 490	1	4					
1426T-2000	2000	29/42	6	0.5 x 3.1	12 x 80	20 / 510	1	2					



- All sizes supplied with a polyethylene standard taper stopper
- Meet ASTM E-1096 Type 4 Specifications for Classification, Design, and Markings

VEE GEE SEPA	VEE GEE SEPARATORY FUNNELS WITH STOPPERS - SQUIBB STYLE											
Cat. No.	Capacity (mL)	Stopper No.	Stopcock Plug Size	Approx. 0.D. x Stem Length (in)	Approx. O.D. x Stem Length (mm)	Approx. Total Length (in/mm)	Pack Qty.	Case Qty.				
20149-250	250	22	2	0.4 x 2.6	10 x 65	13.6 / 345	1	24				
20149-500	500	27	4	0.4 x 2.6	10 x 65	15.4 / 392	1	24				



Filtration Filter Holders

Glass Microanalysis, 47 mm

SIBATA 6168-Series Filter Holders are offered with a wide variety of components for different applications. Available with fritted glass support base for general and biological applications, or with removable stainless steel screen support base and PTFE gasket for ultraclean filtrate or proteinaceous solutions. The borosilicate glass funnels are available in 100 and 300 mL.

Specifications

- Effective Filtration Area: 9.6 cm2 (filter dia. 47 mm, not included)
- Maximum Capacity: 100 mL Funnel: 150 mL; 300 mL Funnel: 350 mL
- Graduated Volume: 100 mL Funnel: 100 mL; 300 mL Funnel: 300 mL
- Connection: Silicone Stopper (No. 8)
- Sterilization: Autoclavable, except PTFE Gasket (at 121°C / 250 °F for 20 minutes)

FILTRATION	KITS	
Cat No.	Kit Includes	
	6168-4711	Funnel, 300 mL
6168-0001	6168-4722	Fritted Glass Support Base
0100-0001	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-4711	Funnel, 300 mL
	6168-4721	Glass Support Base
6168-0002	6168-4731	Stainless Steel Screen
0100-0002	6168-4741	PTFE Gaskets (10 pk)
	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-47100	Funnel, 100 mL
6168-0003	6168-4722	Fritted Glass Support Base
0100-0003	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp
	6168-47100	Funnel, 100 mL
	6168-4721	Glass Support Base
6168-0004	6168-4731	Stainless Steel Screen
0100-0004	6168-4741	PTFE Gaskets (10 pk)
	6168-4751	Silicone Stopper No. 8
	6168-4762	Aluminum Anodized Clamp







6168-4711 Funnel 300 mL



6168-4762 Aluminum Anodized Clamp



6168-4731 Stainless Steel Screen



6168-4741 PTFE Gaskets (10 pk)



6168-4721 Glass Support Base



Stopper No. 8




6168-4722 Fritted Glass Support Base

SIBATA Erlenmeyer Flasks

- Made from high-quality borosilicate tubing with a low coefficient of expansion
- · Uniform wall thickness ideal for heating applications
- Graduation accuracy is ±5% of full capacity

SIBATA ERLENI	MEYER FLA	SKS						
Cat. No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Approx. O.D. of Neck (in/mm)	Rubber Stopper No.	Pack Qty.
10530-100A	100	40 to 100	10	2.5 x 4.1	64 x 105	0.9 / 22	2	10
10530-300A	300	100 to 300	25	3.4 x 6.1	87 x 156	1.3 / 34	6	10
10530-500A	500	200 to 500	50	4.1 x 7.1	105 x 180	1.3 / 34	6	10
10530-1000A	1000	400 to 1000	50	5.2 x 8.7	131 x 220	1.7 / 42	8	10
10530-2000	2000	800 to 2000	200	6.5 x 11	166 x 280	2.0 / 50	10	1

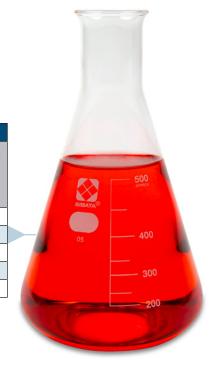

SIBATA Filtering Flasks

Constructed of heavy wall borosilicate glass to withstand high vacuum

• Used in conjunction with vacuum filter systems, these filtering flasks feature heavy-duty rims to reduce chipping

• Feature white permanent graduations and large marking square

Port for tubulation has an outside diameter of 10 mm

SIBATA FILTERI	SIBATA FILTERING FLASKS										
Cat. No.	Capacity (mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Rubber Stopper No.	Pack Qty.	Case Qty.					
1780T-300	300	3.4 x 5.5	86 x 140	8	1	12					
1780T-500	500	4.1 x 6.7	105 x 170	8	1	12					
1780T-1000	1000	5.2 x 8.7	131 x 220	8	1	8					
1780T-2000	2000	6.5 x 10.6	166 x 270	8	1	4					




Lead Rings

Stabilize vessels and labware on the bench or in water baths

- Vinyl-coated lead rings will not mark or scratch benchtops and labware
- C-shape format allows some manual size variation for a customized fit

LEAD RINGS											
Cat No.	Shape	Color	Flask Sizes (mL)	ID (in)	ID (cm)	OD (in)	OD (cm)	Weight* (g)			
20335-1	С	Blue ■	125-500	1.9	4.2	3	7.5	215			
20335-2	0	Blue ■	125-500	1.9	4.8	3	7.7	210			
20335-3	С	Blue ■	250-1000	2	5.1	3.5	9	465			
20335-4	0	Blue ■	250-1000	2	5.1	3.5	9	490			
20335-5	С	Blue ■	500-2000	2.1	5.4	3.9	9.8	595			
20335-6	0	Blue	500-2000	2.2	5.7	3.9	9.8	610			
20335-7	С	Blue ■	1000-4000	2.6	6.6	4.4	11.3	890			
20335-8	0	Blue ■	1000-4000	2.8	7	4.5	11.5	935			







Preserve your solutions with **Parafilm® M self-sealing film** pg. 14



VEE GEE Amber Media Bottles

Commonly used to contain chemicals in liquid or powder form in laboratories

- Constructed of borosilicate glass in compliance with ASTM 438 Type 1
- Amber glass is ideal for light sensitive chemical compounds
- Blue plastic caps have GL-45 DIN threads, include a pouring ring, and are autoclavable
- · Sharp white markings include a large marking square for labeling

VEE GEE Amber Media Bottles

VEE GEE AMBE	VEE GEE AMBER MEDIA BOTTLES											
Cat. No.	Capacity	Graduation	Graduation	Diameter	Height	Pack						
	(mL)	Range (mL)	Interval (mL)	(in/mm)	(in/mm)	Qty.						
20275-100	100	20 to 80	20	2.2 / 56	3.9 / 100	10						
20275-250	250	50 to 200	50	2.8 / 70	5.4 / 138	10						
20275-500	500	100 to 400	100	3.4 / 86	6.9 / 176	10						



SIBATA Class A Graduated Cylinders

Class A, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

- Graduated Cylinders feature hexagonal bases for added stability
- All sizes, except the 2000 mL size, come with a protective, polyethylene hexagonal bumper guard
- Constructed of borosilicate glass with durable white enamel markings
- Exceeds ASTM E-1272 Class A, Style I Specifications for Classifications and Tolerances

SIBATA CLASS	A GRADU	ATED CYLINDERS						
Cat. No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Tolerance (±mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.
2351A-5	5	0.5 to 5.0	0.1	0.05	0.5 x 5	12 x 126	4	48
2351A-10	10	0.7 to 10.0	0.1	0.05	0.5 x 7.2	13 x 182	4	48
2351A-20	20	1.0 to 20.0	0.2	0.05	0.6 x 7.9	16 x 200	4	48
2351A-25	25	1.4 to 25.0	0.2	0.15	0.7 x 8.3	17 x 210	4	48
2351A-50	50	3.5 to 50.0	0.5	0.25	0.9 x 8.6	24 x 218	4	48
2351A-100	100	5.0 to 100.0	1	0.40	1.2 x 9.3	30 x 236	4	48
2351A-250	250	10.0 to 250.0	2	1.00	1.6 x 11.9	41 x 301	4	24
2351A-500	500	25.0 to 500.0	5	2.00	2.1 x 14.3	53 x 362	2	12
2351A-1000	1000	50.0 to 1000.0	10	3.00	2.8 x 16.6	70 x 422	2	8
2351A-2000	2000	100.0 to 2000.0	20	6.00	3.5 x 18.9	90 x 478	1	6



SIBATA Class B Graduated Cylinders

Class B, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

- Graduated Cylinders feature hexagonal bases for added stability
- All sizes, except the 2000 mL size, come with a protective, polyethylene hexagonal bumper guard
- Constructed of borosilicate glass with durable white enamel markings
- Exceeds ASTM E-1272 Class B, Style I Specifications for Classifications and Tolerances

SIBATA CLASS B	SIBATA CLASS B GRADUATED CYLINDERS							
Cat. No.	Capacity (mL)	Graduation Range (mL)	Graduation Interval (mL)	Tolerance (±mL)	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.
2351-10	10	0.7 to 10.0	0.1	0.10	0.5 x 7.2	13 x 182	4	48
2351-25	25	1.4 to 25.0	0.2	0.30	0.7 x 8.3	17 x 210	4	48
2351-50	50	3.5 to 50.0	0.5	0.40	0.9 x 8.6	24 x 218	4	48
2351-100	100	5.0 to 100.0	1	0.60	1.2 x 9.3	30 x 236	4	48
2351-250	250	10.0 to 250.0	2	1.40	1.6 x 11.9	41 x 301	4	24
2351-500	500	25.0 to 500.0	5	2.60	2.1 x 14.3	53 x 362	2	12
2351-1000	1000	50.0 to 1000.0	10	5.00	2.8 x 16.6	70 x 422	2	8
2351-2000	2000	100.0 to 2000.0	20	10.00	3.5 x 18.8	90 x 478	1	6



www.veegee.com

SIBATA Student Graduated Cylinders

Plastic Base, Double-Metric Scale, Graduated, To Contain, Calibration Temperature 20°C/68°F

• These economical graduated cylinders are made of two parts: a strong, borosilicate glass graduate and a detachable, sturdy plastic base which absorbs impacts and reduces breakage

- · All cylinders come with a protective, polyethylene, hexagonal bumper guard
- All markings are in durable white enamel
- Exceeds ASTM E-1272 Class B, Style I Specifications for Classifications and Tolerances

SIBATA STU	SIBATA STUDENT GRADUATED CYLINDERS							
Cat. No.	Capacity	Graduation	Graduation Interval	Tolerance	Approx. O.D. x Height	Approx. O.D. x Height	Pack	Case
	(mL)	Range (mL)	(mL)	(±mL)	(in)	(mm)	Qty.	Qty.
2355-10	10	0.4 to 10.0	0.1	0.10	0.5 x 7	13 x 177	6	24
2355-25	25	1.4 to 25.0	0.2	0.30	0.6 x 8.3	16 x 210	6	24
2355-50	50	2.0 to 50.0	1.0	0.40	0.9 x 8.3	24 x 212	6	24
2355-100	100	5.0 to 100.0	1.0	0.60	1.2 x 9.1	30 x 232	6	24



SIBATA Class A Volumetric Flasks with Snap-Cap

Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for snap-cap fit

- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Constructed of borosilicate glass with a low coefficient of expansion
- Graduation line is sharply defined and of uniform width
- Each flask has a large marking square and includes a polypropylene snap-cap
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA CLASS	SIBATA CLASS A VOLUMETRIC FLASKS WITH SNAP-CAP						
Cat. No.	Capacity (mL)	Tolerance (±mL)	Snap-Cap No.	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.
2303A-5	5	0.02	1	0.8 x 2.3	21 x 59	6	72
2303A-10	10	0.02	1	1 x 3.3	26 x 85	6	72
2303A-25	25	0.03	2	1.5 x 4.3	37 x 110	6	72
2303A-50	50	0.05	3	1.9 x 5.4	49 x 136	4	48
2303A-100	100	0.08	3	2.3 x 6.5	58 x 164	4	48
2303A-200	200	0.10	4	2.9 x 8.1	74 x 205	4	24
2303A-250	250	0.12	4	3.1 x 8.9	78 x 225	4	24
2303A-500	500	0.20	5	3.8 x 10.2	96 x 260	2	12
2303A-1000	1000	0.30	6	4.8 x 11.8	122 x 300	2	8



Snap-Cap

SNAP-CAP FOR S	SNAP-CAP FOR SIBATA CLASS A VOLUMETRIC FLASK							
Cat. No.	Descripton	Fits Class A Volumetric Flask	Color	Each Qty.				
SC#1	Snap Cap Size #1	2303A-5, 2303A-10	Yellow	1				
SC#2	Snap Cap Size #2	2303A-25	Orange	1				
SC#3	Snap Cap Size #3	2303A-50, 2303A-100	Red	1				
SC#4	Snap Cap Size #4	2303A-200, 2303A-250	Green	1				
SC#5	Snap Cap Size #5	2303A-500	Blue	1				
SC#6	Snap Cap Size #6	2303A-1000	Yellow	1				



SIBATA Class A Volumetric Flasks with Ground Glass Stopper

Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for standard taper glass stoppers

- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Constructed of borosilicate glass with a low coefficient of expansion
- Graduation line is sharply defined and of uniform width
- · Each flask has a large marking square and includes a glass stopper
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA CLASS A VOLUMETRIC FLASKS WITH GROUND GLASS STOPPER							
Cat. No.	Capacity (mL)	Tolerance (±mL)	Stopper No.	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.
2306A-1	1	0.01	9	0.4 x 3.1	10 x 79	6	96
2306A-2	2	0.015	9	0.5 x 3.5	12 x 90	6	96
2306A-5	5	0.02	9	0.8 x 2.8	21 x 72	6	72
2306A-10	10	0.02	9	1 x 3.8	26 x 96	6	72
2306A-25	25	0.03	9	1.5 x 4.8	37 x 123	6	72
2306A-50	50	0.05	13	1.9 x 6	49 x 152	4	48
2306A-100	100	0.08	13	2.3 x 7.1	58 x 181	4	48
2306A-200	200	0.10	16	2.9 x 8.7	74 x 220	4	24
2306A-250	250	0.12	16	3.1 x 9.4	78 x 239	4	24
2306A-500	500	0.20	19	3.8 x 11	96 x 279	2	12
2306A-1000	1000	0.30	22	4.8 x 12.9	122 x 327	2	8
2306A-2000	2000	0.50	27	6.2 x 15.6	157 x 396	2	8





Safely dry glassware with our Lab Drying Rack and Workstation Lab Mat pg. 13

SIBATA Amber Class A Volumetric Flasks

Constructed of low-actinic amber glass, providing protection for materials that are sensitive to light

- Feature machine-blown bodies and heavy-beaded, heavy-tubing necks that are tooled for standard taper glass stoppers
- Constructed of borosilicate glass with a low coefficient of expansion
- Designed "To Contain" with a temperature of calibration at 20°C/68°F
- Each flask has a large marking square and includes a glass stopper
- Meet ASTM E-288 Class A Specifications & USP Standards for Volumetric Flasks

SIBATA AMBER C	LASS A VOI	LUMETRIC FI	LASKS				
Cat. No.	Capacity (mL)	Tolerance (±mL)	Stopper No.	Approx. O.D. x Height (in)	Approx. O.D. x Height (mm)	Pack Qty.	Case Qty.
2307A-10	10	0.02	9	1.1 x 3.7	28 x 95	6	72
2307A-20	20	0.03	9	1.4 x 4.5	36 x 115	6	72
2307A-25	25	0.03	9	1.5 x 4.8	39 x 122	6	72
2307A-50	50	0.05	13	1.9 x 5.9	49 x 150	4	48
2307A-100	100	0.08	13	2.4 x 7.1	60 x 180	4	48
2307A-200	200	0.10	16	3.0 x 8.7	75 x 220	4	24
2307A-250	250	0.12	16	3.1 x 9.4	78 x 239	4	24
2307A-500	500	0.15	19	3.9 x 11	100 x 280	2	12
2307A-1000	1000	0.30	22	5 x 12.8	127 x 325	2	8



Stoppers are lightweight yet very strong to reduce chipping and breakage

- Flat top design allows the stopper to stand on its head, freeing the user's hands
- Fully interchangeable with other common flask stoppers and fit all standard labware of comparable standard taper size
- Meet ASTM E-675 Specifications

Cat. No.	Standard Taper Stopper No.	Tinting	Approx. Length of Ground Zone (in/mm)	Height Above Ground Joint (in/mm)	Fit Volumetric Flasks	Pack Qty.
03081	9	Clear	0.6 / 14	0.4 / 10	2306A-1, -2, -5, -10, -25	6
03082	13	Clear	0.6 / 14	0.5 / 13	2306A-50, -100	6
03083	16	Clear	0.6 / 16.5	0.7 / 18	2306A-200, -250	6
03084	19	Clear	0.7 / 19	0.7 / 18	2306A-500	6
03085	22	Clear	0.8 / 20.5	0.8 / 20	2306A-1000	6
03087	27	Clear	0.7 / 21	0.8 / 21	2306A-2000	6
03081-A	9	Amber	0.6 / 14	0.4 / 10	2307A-5, -10, -20, -25	6
03082-A	13	Amber	0.6 / 14	0.5 / 13	2307A-50, -100	6
03083-A	16	Amber	0.6 / 16.5	0.7 / 18	2307A-200, -250	6
03084-A	19	Amber	0.7 / 19	0.7 / 18	2307A-500	6
03085-A	22	Amber	0.8 / 20.5	0.8 / 20	2307A-1000	6





Wire Drying Rack

A versatile self-standing draining and drying fixture that can be used on a table, by a sink, or easily mounted* on the wall

- Designed with eighteen 127mm (5") tall pins and seventytwo 76mm (3") tall pins, it holds up to 90 pieces of glassware, including beakers, flasks, bottles and more
- Durably constructed, the drip tray and back are made from polystyrene while the pins are spot-welded, vinyl-coated steel wire for extra durability
- Bottom drainage tray conveniently slides out for easy emptying

^{*}mounting materials not included

WIRE DRYING RACK					
Cat. No.	LxWxH	LxWxH			
	(in)	(cm)			
30201	18.2 x 7.4 x 20.7	46.2 x 18.2 x 52.5			

Drain and dry

test tubes, beakers, flasks, and other labware

Bottom drainage tray conveniently slides out for easy emptying

Workstation Lab Mat

Safely facilitate workflow processes

- Protect counter tops from hot items up to 200°C (392°F)
- Lip around the edge can hold approx. 250 mL of liquid
- Small footprint, 12 x 14.9 x 0.1 in (30.5 x 37.9 x 0.2 cm)



WORKSTATION LAB MAT					
Cat No.	Color	LxWxH (in)	L x W x H (cm)		
32000-1	Blue	12 x 14.9 x 0.1	30.5 x 37.9 x 0.2		
32000-2	Purple	12 x 14.9 x 0.1	30.5 x 37.9 x 0.2		



Gridded Surface for tube staging, preventing movement of objects

Reversible

Side One: combination gridded and smooth surface Side Two: smooth surface only

Parafilm® M Sealing Film

Protect the integrity of your laboratory and research applications

Parafilm® M is a semi-transparent, flexible, thermoplastic film with two-way stretch

- Protect the integrity of research applications with a tight moisture-barrier that holds a strong seal and doesn't release from glassware, despite off-gassing
- Reduce the risk of tampered data with a covering that is odorless, colorless and semi-transparent
- · Prevents moisture and volume loss due to material composition and tight seal
- Flexible and self-sealing material allows it to cling around irregular shapes and surfaces
- Resistant up to 48 hours against many polar substances such as saline solutions, inorganic acids and alkaline solutions
- Stretches more than 200% of original length
- Two color options available in 2" rolls (natural and purple) for color coding purposes



PARAFILM® M SEALING FILM							
Cat. No.	Color	Film Wid	dth (cm)	Roll Len (ft)	gth (m)		
2200N-2-250	Natural \square	2	5	250	76.2		
2200P-2-250	Purple =	2	5	250	76.2		
2200N-4-125	Natural \square	4	10	125	38.1		
2200N-4-250	Natural \square	4	10	250	76.2		
2200N-20-50	Natural \square	20	50.8	50	15.2		



Parafilm® M is a registered trademark of Amcor Limited

Acrylic Dispenser for Parafilm® M Sealing Film

Store, dispense, and cut Parafilm® M, tape and labels

- Strong, crystal-clear acrylic dispenser makes your film supply visible and features a serrated cutting blade
- Rubber feet secures in place while cutting
- Dispenser holds one or two 50 mm (2-inch) rolls or one 100 mm (4-inch) roll

ACRYLIC DISPENSER FOR PARAFILM® M					
Cat. No.	L x W x H (in)	L x W x H (cm)			
2200-1	4.7 x 6.6 x 6.9	11.9 x 16.8 x 17.5			



