

# BRIO 5CCT

## 120V AC 5CCT Slim Downlight

A favorite for residential and commercial applications, the Brio 5CCT becomes a 5-in-1 fixture with 5 selectable white color temperatures. With up to 900 lumen output performance and available in 4” and 6” remodel trim sizes, the Brio provides an ideal solution for tight spaces with its small height and included remote junction box.

- Excellent color rendering (90+ CRI)
- Aluminum housing with polycarbonate lens
- Five Selectable color temperatures:  
2700K / 3000K / 3500K / 4000K / 5000K
- Lumen output up to 900 Lumens
- Dimmable with most TRIAC/CL/ELV Dimmers
- Remote driver with hardwire junction box
- Spring loaded mounting clips
- Type IC and cETLus Listed for wet locations
- 50,000 hours rated life
- ENERGY STAR certified
- JA8 Compliant

PROJECT:
TYPE:
LOCATION:
CATALOG NUMBER:



**BRIO 5CCT**




### BRIO 5CCT SERIES QUICK SPECS

<b>VOLTAGE</b>	120V AC, 60Hz
<b>WATTAGE</b>	9W / 12W
<b>LUMENS</b>	See Ordering Information
<b>CCT OPTIONS</b>	2700K / 3000K / 3500K / 4000K / 5000K
<b>CRI</b>	90+
<b>MOUNTING</b>	Remodel Recessed mount
<b>DIMMING</b>	TRIAC / CL / ELV (10 - 100%)
<b>BEAM ANGLE</b>	110°
<b>OPERATING TEMP</b>	-13°F (-25°C) to +113°F (+45°C)
<b>CERTIFICATIONS</b>	cETLus Listed - Wet Location - Type IC
<b>RATED LIFE</b>	50,000 Hours


### BRIO 5CCT SERIES ORDERING INFORMATION

ITEM NUMBER	SIZE	FINISH	VOLTAGE	CCT	CRI	LM @ 27	LM @ 30	LM @ 35	LM @ 40	LM @ 50	WATTAGE	DIMMING
<b>BRD4-5CCT-RD</b>	4"	White	120V	5CCT	90+	530	550	560	600	580	9W	10-100%
<b>BRD6-5CCT-RD</b>	6"	White	120V	5CCT	90+	850	880	900	900	890	12W	10-100%

**BRIO 5CCT SERIES QUICK DIMENSIONS AD56**

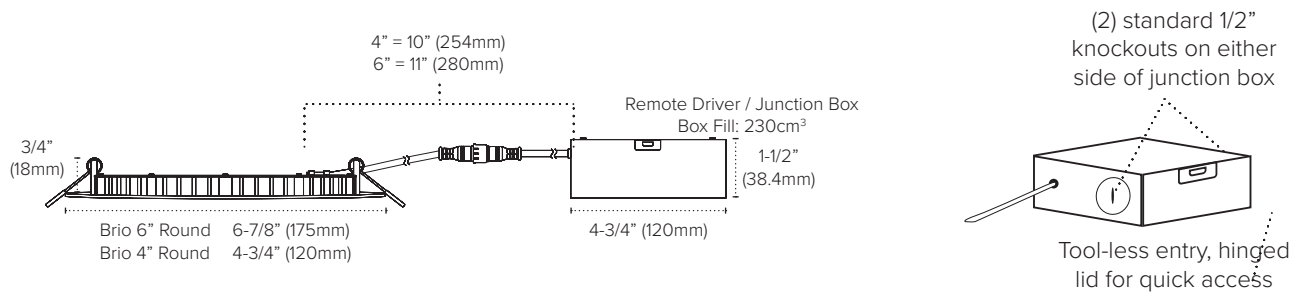

HOLE CUT SIZES	4" BRIO	6" BRIO
Round	4-3/8" (111mm) Diameter - Round	6-1/4" (160mm) Diameter - Round

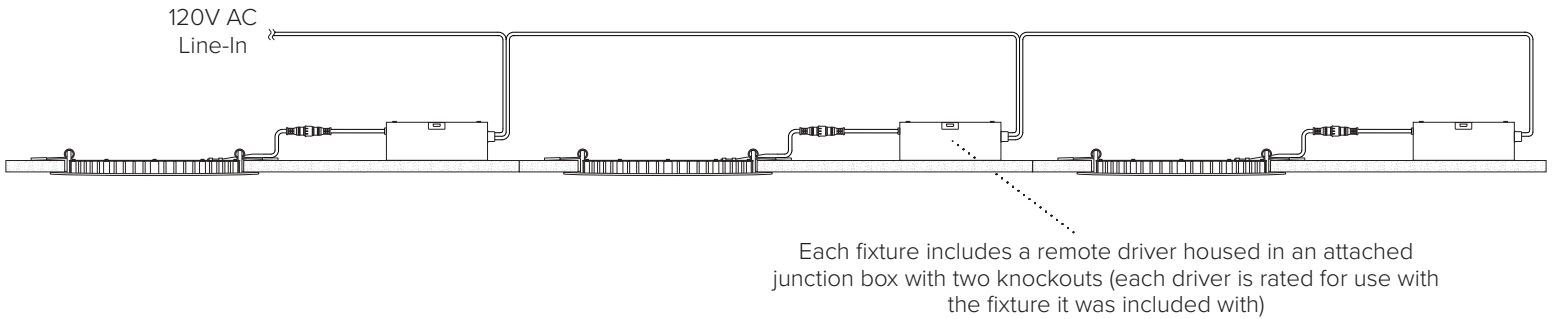

**BRIO 5CCT SERIES ACCESSORIES**

Image	Part Number	Description
	RP-2/4/6	Steel rough-in plate w/hangar bars for 2" / 4" / 6" use





# AMERICAN LIGHTING WARRANTY

## LIMITED WARRANTY FOR LED PRODUCTS: 5 YEARS

### LIMITED PRODUCT WARRANTY

Our products are warranted to be free from defects in material and workmanship for the warranty period listed. Warranty periods begin from the date of shipment from American Lighting Inc's warehouse to the original purchaser. Products that prove to be defective during their specific warranty period will be either repaired or replaced, at the sole discretion of American Lighting Inc. Claims for defective products must be submitted in writing to American Lighting Inc's RGA Department within the warranty period. Upon approval of such return, American Lighting Inc reserves the right to inspect the product for misuse or abuse. Claims for indirect or consequential damages or for product that, in American Lighting Inc's opinion, has been misused will be denied. This is a warranty of product reliability only and not a warranty of merchantability or fitness for a particular purpose. American Lighting Inc shall have no liability whatsoever in any event for payment of incidental or consequential damages, including, without limitations, installation costs and/or damages for personal injury and/or property. These products may represent a possible shock or fire hazard if improperly installed or altered in any way. This warranty does not apply to any product that has not been properly installed in accordance with current local codes and/or the National Electrical Code. Products that require a transformer, driver, or power supply must be used in conjunction with American Lighting Inc's recommended power supply to ensure safety and retain product warranty.

### PRODUCT SPECIFICATIONS

For the latest product information, updates, instructions and details concerning specifications, colors, finishes, performance, installation and design, visit [www.americanlighting.com](http://www.americanlighting.com). Color may vary from the color printed herein due to limitations in photographic and printing processes. American Lighting Inc. reserves the right to change product specifications without notice. Other product specifications such as color temperature, wavelength characteristics and lumen output are subject to production limitations and may vary. LED technology is changing rapidly, and not all color temperatures and performance levels can be duplicated at a later time. Best practices include purchasing 10-15% more for a particular project on the same initial order where white LED color temperatures must be maintained over project and product life. Eventual product replacement should be considered at layout and design stages. Best practices also include testing connections and product performance prior to mounting and/or installing.

### AVERAGE LIFE

Average incandescent lamp life, rated life and average life are terms used to describe the number of hours at which half of the lamps have failed. For LEDs, the hours of rated life specify the point where 70% of original lumen output is reached. Below this point, the effective life is over, however, the LED may still emit light. Individual results may vary with actual environmental conditions including, but not limited to, proper installation, ambient temperature and/or input voltage fluctuations.