


PRODUCT DESCRIPTION:

Utility ceiling-mount fixture for general lighting applications in parking garages, designed for easy installation and maintenance. Can also be used to light entrances, hallways, walkways, ATM machines, and drive-thrus.

FEATURES:

- Integral 10kV surge suppression protection
- Saving more than 75% energy compared with traditional grid fixtures
- Perfect Light Uniformity

DIMENSIONS:

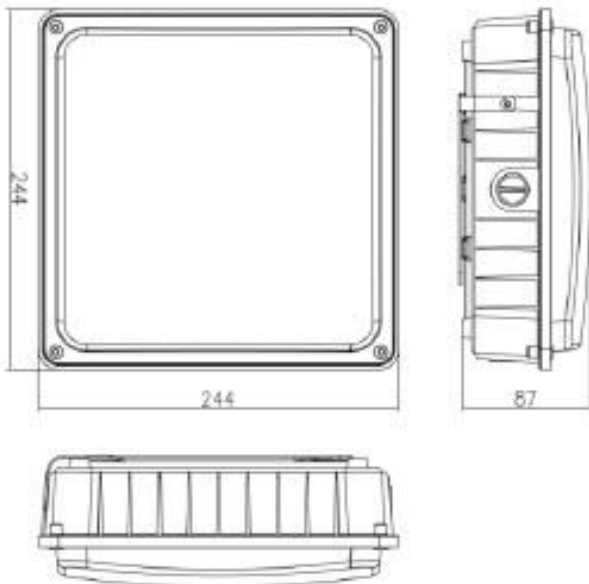

LED Canopy 70W Spec

LOD-CP70WD50K



SPECIFICATIONS:

SPECIFICATION	Details
Model	LOD-CP70WD50K
Input Wattage (W)	70W
Lumens Delivered (LM)	8,020LM
Efficacy (LM/W)	114LM/W
CRI	70
Lifespan	50,000 hours
Color Temperature	5,000K
Wattage Equivalent	100W
Dimmable	0-10V
Input Voltage	120-277V
Power Factor	0.9
Housing	Aluminum Alloy + PC shell
IP Rating	IP64
Lens	Frosted
THD	20%
Mounting	Internal driver
Size	9.6" x 9.6" x 3.4"
Certification	DLC, ETL
Operating Temperature	-40 to 50°C
Environment	Outdoor
Warranty	5 years

