

User manual Hoselink Quick-connect Fittings



GENERAL INFORMATION



To watch video fitting instructions, please visit:
www.hoselink.com/pages/how-to-videos

For further assistance please email usa-support@hoselink.com

Connector Types

These instructions demonstrate how to fit all connector types across the Hoselink range. Please follow the instructions to match the connectors you have purchased.

Hose Connector with Flow Control



Proceed to Step 3

Universal Faucet Connector



Proceed to Step 1


Accessory Connectors



Proceed to Step 2

Step One - Fit Faucet Connector

Screw tightly on to the faucet. If connector appears too small, unscrew black size reducer and screw the main connector body on to the faucet.

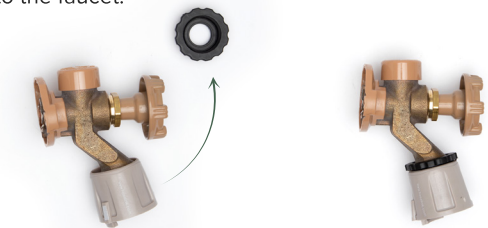

Step Two - Fit Accessory Connector with Swivel

Screw directly into the Hoselink Spray Nozzle.



Step Three - Connecting the Hose Connector with Flow Control

Screw fitting directly onto the male thread on the end of your hose. Ensure the Flow Control Lever is pulled back (towards the hose) when using to allow water to flow through the system. Push lever forward (towards the Spray Nozzle) to shut the water flow off.




Step Four - Connecting it all together

Line up the lugs on each fitting then point and twist together until firmly locked.



Line up markers and join together

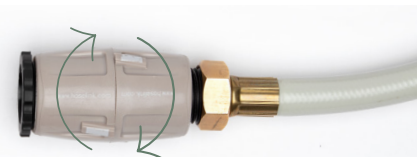

Twist to lock until you hear a 'click'

Adapt your existing accessories to the Hoselink system!

Available to purchase is Hoselink's Quick-connect Accessory Add-on Pack, item US9962

This bundle includes:

1 x Universal Faucet Connector

3 x Accessory Connectors



Thread directly into your accessory (could be a sprinkler or spray nozzle). You can then connect to your Hoselink-fitted hose using a point and twist motion. This enables a quick-connect system, improving your overall watering experience.

All Hoselink fittings are interchangeable, therefore will work in any sequence.

To view the bundle, please visit:
www.hoselink.com/products/accessory-conversion-bundle

Tips on using Hoselink fittings

Don't lose o-rings

Hoselink fittings feature an o-ring to o-ring seal between each connector, which is how they remain watertight. They can be lost if you disconnect fittings under water pressure, so always turn off the water supply and release pressure before disconnecting. Be sure to keep spare o-rings handy, just in case.

How to join hoses

It's easy! Simply purchase any length of hose and, provided it has a female thread on one end and a male thread on the other, it will screw directly into your current set up.

Troubleshooting

Please refer to our website for text & video instructions:
www.hoselink.com/pages/troubleshooting

For more information visit

hoselink.com

or call

(833) 216-4673