

OCEAN  
GUARDIAN

Powered by  
Shark Shield® Technology

## INSTALLATION GUIDE

# FREEDOM7 & SCUBA7 REPLACEMENT ON/OFF SWITCH

### WARNING AND SAFETY INFORMATION

Visit [ocean-guardian.com/pages/user-manuals](https://ocean-guardian.com/pages/user-manuals) to download the latest user manual.  
Read all Warnings and Safety Information in the user manual before use.

#### STEP 1

Ensure your FREEDOM7 (GU1000C) or SCUBA7 (DU1000C) is clean and dry, and that you have clean workspace. You will need a medium size Phillips head screw driver and a red Ocean Guardian Replacement ON/OFF Switch as shown.



#### STEP 2

Using the screw driver, remove the old ON/OFF switch by turning the screw counter clockwise. The switch will come straight off after a few turns, leaving only the old O-ring on the unit. Using a sharp object, gently remove the old O-ring. Dispose of the old switch and O-ring, and do not re-use any old components.



#### STEP 3


If necessary, clean any residual rust from the old switch with a sponge dampened with water. Do not use any harsh chemicals. Thoroughly dry the unit when finished.



#### STEP 4

Insert the new large O-ring onto the Ocean Guardian unit as shown.





OCEAN  
GUARDIAN


Powered by  
Shark Shield® Technology

## INSTALLATION GUIDE

# FREEDOM7 & SCUBA7 REPLACEMENT ON/OFF SWITCH

### STEP 5

- A. Insert the small O-ring into the top of the new switch knob as shown.
- B. Insert the inner knob and the screw, then place the new ON/OFF switch onto the unit.
- C. Note that the ON/OFF switch knob post on the Ocean Guardian has small indents that help line up with the inner switch knob indent.

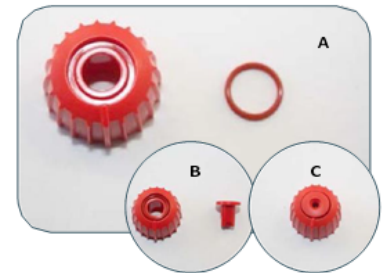

### STEP 6

Line up the ON/OFF switch with the ON marker on the main housing.

Note that the inner knob is level with the top of the larger knob. This indicates that you have correctly aligned the indents.



### STEP 7

Gently tighten the screw ensuring it is not too tight.

If it is too tight it will be difficult to rotate the switch, if this is the case back off the screw slightly until the switch is easy to rotate but not too loose.

Make sure the surface of the inner knob is flush with the top of the outer knob, indicating that the indents are correctly located, as shown in this picture.



### STEP 8

Confirm that your unit is turning on and off with a green flashing light indicating it is working (out of salt water). If the light is not flashing, check your unit is fully charged.

