



ROBUST KEYLESS ACCESS



For more challenging environments, the KL1200 includes all the benefits of the KL1000 but is tougher and more robust.

With additional programming features, stainless steel buttons, dual fixing points and increased battery life, the KL1200 provides enhanced benefits to facilities managers looking to simplify access control without the need for keys. Quick, tough and cost effective.



Easy to install



On the door programming



Two year guarantee*



Private and Public Functions

FEATURES

- 11 button keypad
- 8 digit Master and Sub-Master Code
- 4 digit User Code
- 6 digit Technician Code
- Right hand version available
- Up to 50,000 operations from 2 x AAA batteries (supplied)
- Battery override
- Auto unlock feature
- Audible keypad
- Slam latch accessory available
- IP54 rated when fitted with gasket
- All parts / fixings / templates included

FUNCTIONS




Private Function

This is the default function and is already pre-programmed in new locks. This function is used where the same code will be repeatedly used, e.g. an employee with the same locker/drawer in the workplace.



Public Function

In this function the KitLock operates with a single User Code. The user enters a personal four digit code, this locks the lock. The same code is entered once only to open the lock before automatically being erased and ready for the next user. This function is used for short term, multiple occupancy applications, e.g. hot desking in an office or a locker in a sports club.

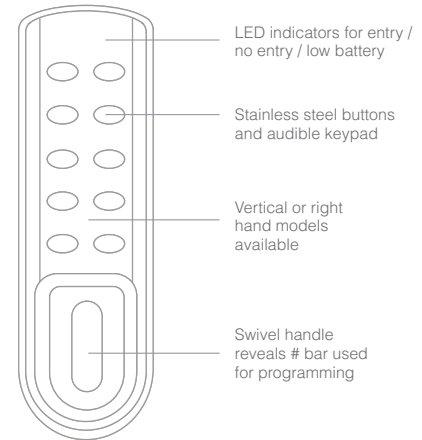

PRODUCT DIMENSIONS



Code Management

KL1200 has four code levels available:

- 8 digit Master Code
- 8 digit Sub-Master Code
- 4 digit User Code
- 6 digit Technician Code


The KitLock is supplied with two factory set codes:

- Master Code
- User Code

Before installing change the Master and User Code by following the Programming and Operating Instructions.

Easy Installation

Everything you need is included to ensure a quick and easy installation.



TECHNICAL SPECIFICATIONS

| FEATURE | DESCRIPTION |
|---------------------|--|
| Operations | Up to 50,000 opening per 2 x 1.5 AAA batteries |
| Battery Override | A 9 volt PP3 battery can be placed against external contacts |
| Low Battery Warning | Red LED will flash on opening to indicate low battery |
| Functions | Private and Public |
| Buttons | 11 individual round buttons |
| Material | Zinc Alloy |
| Finish Colour | Silver grey as standard |
| Door Thickness | Ready to fit doors up to 25mm (1") |
| Memory | Non-volatile memory will be retained |
| Fitting | Easy to install and program |
| Fitting Options | Vertical and right hand models |
| IP54 Rated | When used with rubber gasket (available separately) |
| Slam Latch | Separate accessory - allows 'push shut' locking of the door |

Note: Not suitable for Chlorine environments.



Scan to shop!

www.kitlock.com

