



SIMPLE DIGITAL ACCESS



Fit as a new install or as a quick retrofit when upgrading from basic single code mechanical locks.

CL2000 electronic locks are ideal for a wide range of light duty access control applications. The CL2000 is fully programmable on the door via the keypad with a multiple range of functions. The lock is easily fitted as a new installation or as a quick retrofit when upgrading from basic single code mechanical locks. The locks store up to 80 different User Codes. Codes may be 4, 5 or 6 digits long. Program via the keypad using the Master Code.



Easy to install



On the door programming



Two year limited warranty*

80

Up to 80 User Codes

FEATURES

- Key bypass as standard
- Suitable for wooden / metal doors between 1³/₈" - 2³/₈" thick
- User Codes 4, 5 or 6 digits long
- Allows up to 10 one time User Codes
- Up to 80,000 operations from 2 x 1.5v AA batteries (supplied)
- Surface deadbolt, tubular deadbolt and latch models available
- Remote release connections
- Suitable for interior and exterior use
- Tamper time out and low battery warning
- Available in brushed steel



LOCK MODELS



CL2200

Surface Deadbolt

Bolt slides on inside of door, to lock or unlock. Bolt is moved manually by outside knob after code input and freely by inside knob at all times.



CL2210

Tubular Deadbolt

Bolt extends 25mm (1") beyond door edge when locked. When a valid code is entered the outside knob will retract the bolt.




CL2255

Tubular Latch

Light duty tubular latch retracts via the outside knob after a valid code input. When the door closes, the spring latch will lock the door.

Tubular Latch:

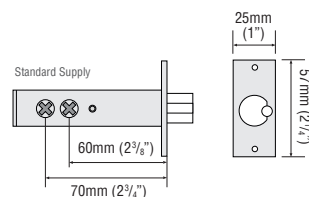

Requires 1" (25mm) cross bore hole

ADDITIONAL FEATURES

Passage Function

All models feature a passage function that can be programmed at the keypad using the Master Code.

Code Change Method


Simply program and manage codes via the keypad while the lock is on the door.

Remote Release

Two REM ports are provided for connection to exterior switches or alarm systems.

Key Bypass


Key bypass is a standard feature on all models within the CL2000 range. Locks can be keyed alike on request.

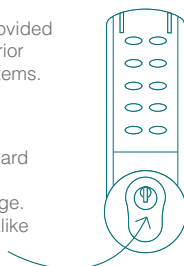

PRODUCT DIMENSIONS

CL2000 CL2200

CL2255

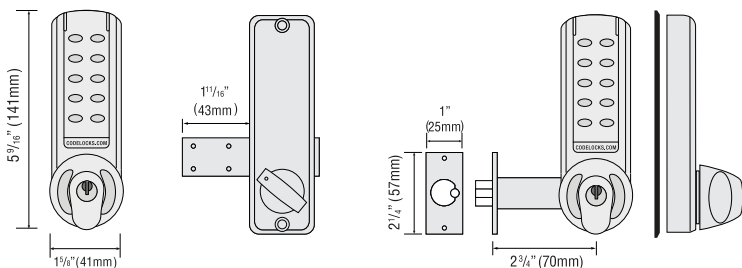

TECHNICAL SPECIFICATIONS

FEATURE	DESCRIPTION
Spindle Type	Flat bar spindle, 5/16" (8mm) adaptor supplied
Operations	Up to 80,000 per set of 2 x 1.5v AA batteries
Tubular Latch	Light duty deadlocking latch
Low Battery Warning	Red LED will flash on opening to indicate low battery
Battery Override	Via a 9v battery placed against external contacts
Buttons	Individual stainless steel buttons
Material	Zinc Alloy
Finish Color	Brushed Steel
Non Handed	Locks will fit doors hung on the left or right
Door Thickness	35mm - 60mm (1 3/8" - 2 3/8")
Key Bypass	As standard
Keyed Alike	Locks can be supplied keyed alike on request
Memory	Stores up to 80 User Codes
Install Options	Vertical only
Suitable For	Interior and exterior use



Scan to shop!

www.codelocks.com

