

DB Series Deadbolts

Value Product

The DB series is a Grade 2 commercial deadbolt that features an adjustable backset in an attractive low profile package. It is ideal for commercial common areas and residential use.

Certification & Compliance:

- Designed to meet ANSI A156.36, Auxiliary Locks, Grade 2
- Underwriters Laboratories (UL and CUL) listed for use on 3 hour fire doors when used in conjunction with a rated primary latching device.



Function – Single Cylinder; Double Cylinder.

Housing – Solid zinc cylinder housing.

Latch Bolt – 1" (25mm) throw brass deadbolt with hardened, free spinning, steel pin insert.

Deadbolt Front – 2-1/4" (57mm) x 1" (25mm). Plastic spacer supplied for 1-1/8" (27.5mm) mortise.

Backset – 2-3/8" – 2-3/4" (60mm – 70mm), adjustable.

Door Thickness – 1-3/8" – 2" (35mm – 50mm).

Strike – 1/32" (2.3mm) steel with wood frame reinforcer.


Cylinder – Solid brass, drilled for 6 pins pinned to 5. Supplied with 2 nickel plated brass keys per keyed lock.

Keyway – Schlage C standard.


Cylinder Options – Accepts 6 or 7 pin, small format interchangeable cores. Supplied less core. Will accept Best or Falcon type cores

Finishes – 605/613/630.

Single Cylinder



Double Cylinder



Finishes:

1

2

3

	BHMA	U.S. Equivalent	Arrow Equivalent	Finish
1	605	US3	03	Bright Brass
2	613	US10B	10B	Dark Oxide Bronze, Oil Rubbed
3	630	US32D	32D	Satin Stainless Steel



DB Series Deadbolts

Value Product


Deadbolt:

Part No. #157

Backset: Adjustable Backset 2-3/8" or 2-3/4"

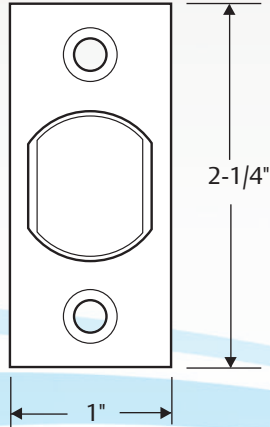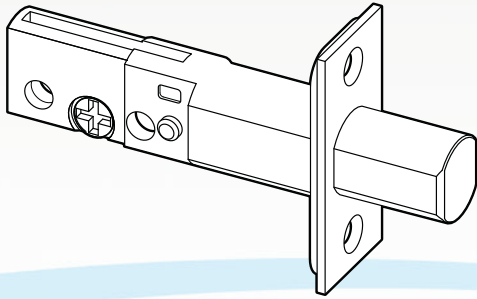


Spacer for 1-1/8" latch mortise.
Supplied with lock.

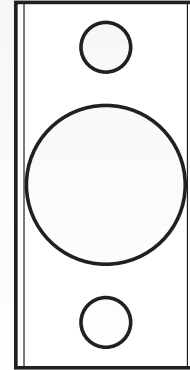


Strikes:

Part No. #394 (Includes the Frame Reinforcer)

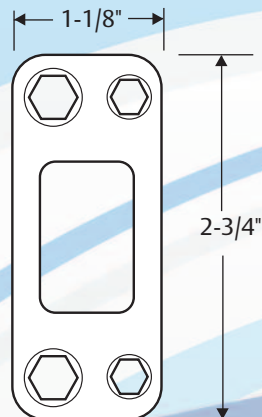

Frame Reinforcer
supplied with lock.

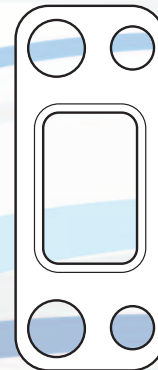

Cylinder:

Part No. 95C-CS