

Specifications


Image Sensor	1 / 2.7" Progressive Scan CMOS
Effective Pixel	5MP 2592 (H) x 1944 (W)
Min. Illumination	0.05lux@F1.2(AGC ON),0Lux with IR Mainstream: (1-15fps optional)
Resolution	5MP (2592x1944), 4MP(2592x1520), 1080P(1920x1080), 960P(1280x960P), 720P(1280x720P) Substream: VGA(640x480), QVGA(320x240)
Aspect Ratio	4 : 3
White Balance	AUTO/INDOOR/MANUAL
AES Speed	1/5s – 1/20000s/AUTO
AGC	Off/Low/Mid/High Optional
Noise Reduction	3D
BLC	Yes
WDR	Yes
Video Output	RS-485
Audio	Two-Way Audio
Speaker	Yes
Lens/ Lens Mount	4.0mm/F2.0 fixed lens / M12
Viewing Angle	D: 104° H: 87° V: 47°
Power Source	DC12V±10%
Power Consumption	4.2 W
Current Consumption	350mA
Operating Temperature	-40°F ~ 104°F
Operating Humidity	Less than 95% RH (no condensation)
Dimension	Ø70mm×151mm
Environment Rating	IP67
Cold start Temp	-4°F
Camera Housing Material	Metal
RoHS Compliance	Yes
Smart IR	Yes
IR Night Vision Range	65 Feet
Built-in IR LED/ICR	Yes, 2 Array IR
IR LED Type	850nm
IR Angle	100°
PIR Angle	Up to 115°
PIR Distance	Up to 20 Feet
Flood Light	2 PCS Up to 30 Feet



Highlights

- 2 Built-in Floodlights with Distance Up to 30 Feet
- Built-in PIR with Distance Up to 20 Feet
- 5MP Resolution
- H.265 Compression
- Built-in POE
- IP66 Weatherproof Rated
- Built-in POE
- ONVIF Compliant

Dimension

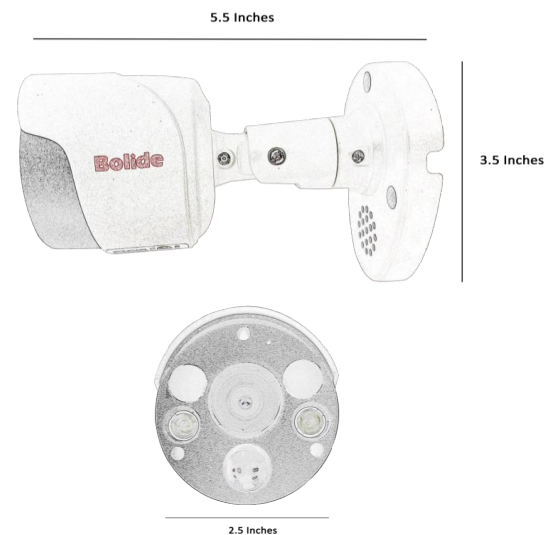

* Specifications Are Subject to Change Without Notice.