

### Specifications


|                   |  |
|-------------------|--|
| Image Sensor      | 1 / 2.7 "CMOS  |
| Resolution        | 2560 (H) x 1920 (V)<br>1920 (H) x 1080 (V)                 |
| Effective Pixels  | 5MP / 4MP / 2MP  |
| Focal Length      | 3.3 – 12mm Varifocal Lens                                  |
| IR Distance       | 24pcs Flux IR Up to 130 Feet                               |
| Output Mode       | AHD / TVI / CVI / Analog                                   |
| Min. Illumination | Color: 0.1 Lux White / Black<br>0.1 Lux ( with IR LED On ) |
| AGC               | Auto   |
| WB                | Auto   |
| AES               | NTSC: 1 / 60s ~ 1 / 10000s<br>PAL: 1 / 50s ~ 10000s        |
| D/N Conversion    | ICR Mechanical Switch                                      |
| Contrast          | 10 Level Can Be Adjusted                                   |
| Sharpness         | 20 Level Can Be Adjusted                                   |
| Saturation        | 20 Level Can Be Adjusted                                   |
| DNR               | 15 Level Can Be Adjusted                                   |
| Video System      | NTSC   |
| DWDR              | ON/OFF   |
| S/N Ratio         | More than 48 dB  |
| Storage Temp.     | -40°C ~ 140° C   |
| Operating Temp.   | -40°C ~ 131° C   |
| Power Supply      | 12VDC  |
| Weight (lb)       | 1.8 lbs  |



### Highlights

- Max 5MP Resolution
- Supports 9 Different Video Formats
- Supports 5MP, 4MP, 2MP, and Analog Resolution
- Supports AHD, TVI, CVI, and Analog Video Formats
- 3.3 – 12mm Varifocal Lens
- IP66 Weatherproof Rated Housing
- 12VDC

### Nine formats in one camera

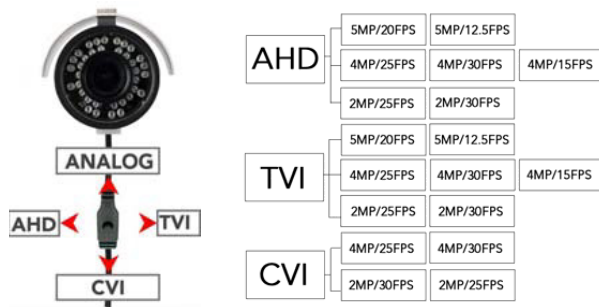

### Dimension

