


PD10-M SERIES



- **E**lectric Motor driven Latch Pullback – Quiet, fast, smart, and durable
- **L**ong wire runs of 700' or less with 18 gauge wire – industry-leading technology reduces installation cost vs. competitor EL devices
- **C**omparable - Exact retrofits for Doromatic 1600/1700 or First Choice 3600/3700
- **A**NSI/BHMA A156.3 Grade 1 Narrow Style Storefront – Rim and Concealed Vertical Rod Exit Device
- **T**ested to 4 times industry standard (500,000 cycles) – reliable and high performance exit devices

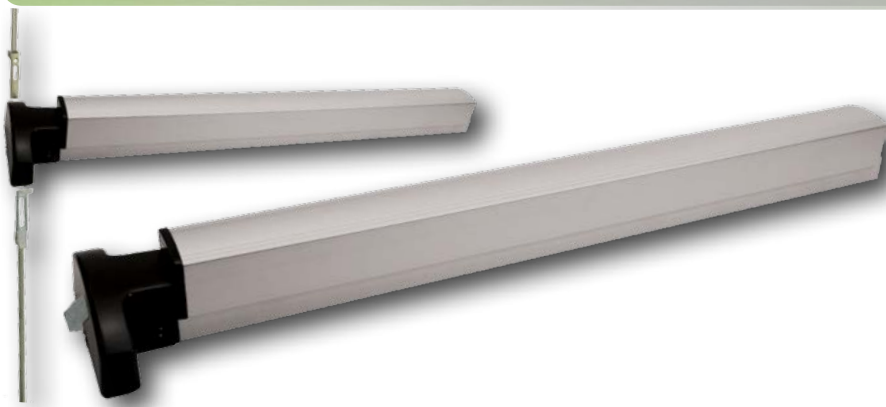

The Command Access **PD10-M** series is a motorized latch pullback Grade 1 storefront exit device. All PD10-M models are equipped with our PTS “push to set” technology. We know that door conditions change and in retrofit scenarios you never know exactly what you’re walking into. But with our PTS adjustment your post installation adjustment is greatly simplified in **5 quick seconds**. Install this device with the confidence of knowing that the PD10-M meets or exceeds the high standards of other grade 1 products and carries our 3-year “no hassle” warranty.

Models Available

- PD10-M-RIMA** - Complete RIM device, Non-Handed, Motorized Latch Pullback, w/electric dogging. Fail Secure (EU) Aluminium finish
- PD10-M-RIMD** - Complete RIM device, Non-Handed, Motorized Latch Pullback, w/electric dogging. Fail Secure (EU) Durototic Finish
- PD10-M-CVRA** - Complete CVR device, Non-Handed, Motorized Latch Pullback, w/electric dogging. Fail Secure (EU) Aluminum Finish
- PD10-M-CVRD** - Complete CVR device, Non-Handed, Motorized Latch Pullback, w/electric dogging. Fail Secure (EU) Durototic Finish

Please specify door width 36" or 48" and height 84". All other sizes available at an additional charge.

U.S. Customer Support
1-888-622-2377

Visit our website for more details
www.CommandAccess.com

Canada Customer Support
1-855-823-3002

FEATURES:

- Our motorized Latch retraction is fast, quiet, smart and smooth!
- MM3 Smart Module: On board diagnostics with audible feedback for adjustment and power issues
- "PTS": 5 second Electronic adjustment for easy post installation adjustment
- Low current draw: Compatible with most 24VDC, 1A (or greater) regulated power supplies
- Up to 700' wire run with 2/18 wire - Long wire runs provides installer with convenience of placing the locking device power supply in a centralized location; i.e. the same closet as the access panel
- Electric dogging rated for continuous duty - Auto relock if dogged push pad is pulled from position
- Motors have more pulling power than traditional solenoid devices; which helps with vertical rod devices
- 6' cable with Quick Connect for MM3 module to easily connect to power supply lead
- 3-year "no hassle" warranty - Longer than the traditional 1 year warranty because our stuff works!

RECOMMEND POWER SUPPLIES:

All Command Access exit devices & field installable kits have been thoroughly cycle tested with Command Access power supplies at our factory.

- PS1
- PS2/2BB
- PS5-4
- PS5-6
- PS5-8



For more information [click here](#) or go to our website

SPECIFICATIONS:

- Voltage range – 24 to 30 VDC
- System protection – unit shutdown when voltage exceeds 30VDC
- Current Peak – 1A
- Current Hold -125mA
- Electronic travel adjustment – approx 1/4"
- 700' with 18ga wire • 1000' with 16ga wire • 1250' with 14ga wire • 1500' with 12ga wire

Hardware:

- Materials: push bar made of extruded aluminum, anodized in finish specified.
- Pushbar Length: dimensioned for 36" and 48" doors. Consult factory if field cut is required for smaller size doors with latch pullback
- Door Height (for CVR): 7' standard; designate 8' or 9' optional height when ordering
- Door thickness: suits standard 1-3/4" thick aluminum, stile and rail doors
- Stile Width: Minimum 2" stile required. Fits medium and wide stile doors as well.
- Stile Wall: minimum 1/8" required for installation
- Dogging: Electronic Dogging is standard with motor technology – push bar stays retracted when dogged.
- Fasteners: all provided
- Cylinders: not provided. Install RIM cylinder by others.
- Entry trim: not available from Command Access. Consult factory for options



PTS & Diagnostics
Video
Click or Scan

ACCESSORIES: *Additional charge*

- Request to Exit (REX) - Switch available factory installed
- Latch Bolt Monitor (LBM) - Switch available factory installed
- Request to Exit Kit (PD10REXKIT) - Switch available for installation in the field
- Latch Bolt Monitor Kit (PD10LBMKIT) - Switch available for installation in the field
- QC Connectors: Molex door cords with quick connectors for plug and play installation

Model No.	Notes:		
Customer:	Job No./Name:	Date:	Provided by: