

PRODUCT FEATURES

The BTG Floodlight camera is weatherproof and has a built-in microphone and speaker. Detect people nearby and send alerts to your iOS or Android device, you can automatically receive notifications from visitors, talk to them immediately and check from anywhere the events detected by the camera.

SPECIFICATIONS

Sensor	1/2.7" Full-HD 1080p CMOS
Chipset	Hi3518E V200
Operation System	Embedded Linux
Resolution	1920×1080 Full HD
Lens	1/2.7"5 Mega Panoramic Lens
Angle of Field (DHV)	190° 142° 102°
Day/Night	IR Cut Filter
IR Distance	10m
Video Compression	H.264
Audio Encoding	AAC G.726
Network	802.11 b/g/n @ 2.4GHz
Led type	SMD
CRI	80
ССТ	3000-6500 K
Luminous Flux	1750Lm
Power	20W
Lifespan	50000Hours
Alarm	PIR Motion Sensor
Detection Distance	7m
Microphone	Built-in
Speaker	Built-in
Network Configuration	Sound Wave
Protocols	TCP/IP, HTTP, TCP, UDP, SMTP, DHCP, DNS, P2P
Storage	Support Micro SD Card
IP Rate	IP65
Power	AC110 ~ 240V
Working Temperature	-30°C ~ +50°C
Working Humidity	≤80%RH



DOWNLOAD AND INSTALL BTG IOT APP








United States Headquaters – 468 S. San Dimas Ave., San Dimas, CA 91773

Toll Free: (800) 355 0895

Tel: (909) 305 8889 | Fax: (909) 305 0999

www.btgsmart.com



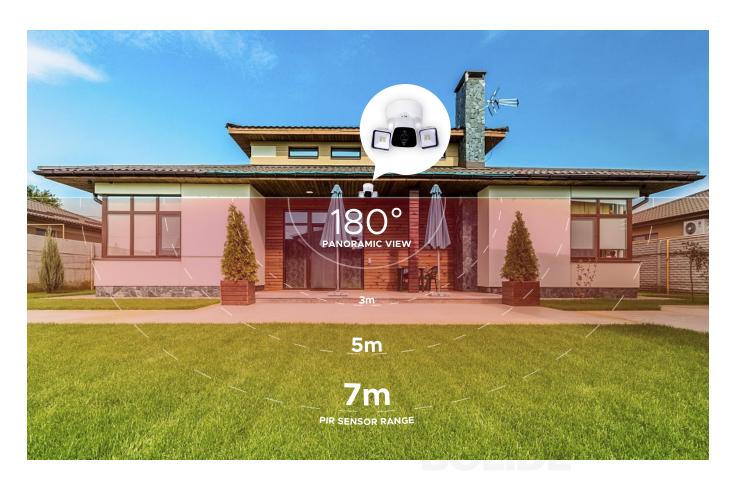





EASY SET-UP



TWO-WAY AUDIO AND MICROPHONE



ENTIRE HOME-SECURITY



1080P RECORDING







United States Headquaters – 468 S. San Dimas Ave., San Dimas, CA 91773

Toll Free: (800) 355 0895

Tel: (909) 305 8889 | Fax: (909) 305 0999

www.btgsmart.com