3D>2><?02C

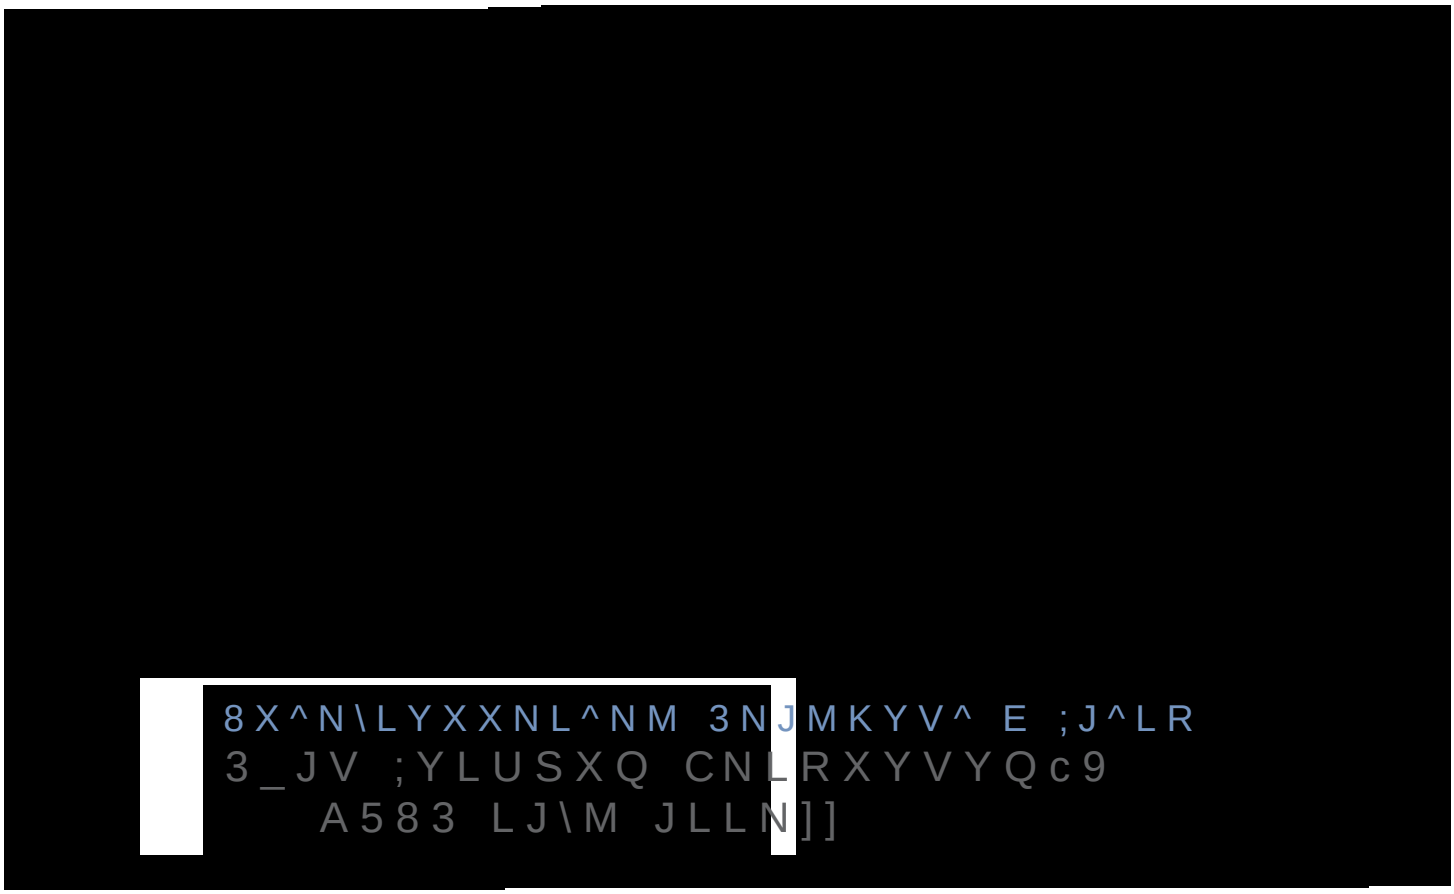

BNL_\N JXM WJXJQN aRJ^ÿ] WY WZY\
^Y cY_ð 3N]SQXNM aS^R ^RN ` SVS^ KN
SX]^JVVNM J] SX^N\LYXXNL^NM MNJMKYV^ O VJ^LR
VYLU]N^] OY\ M_JV KY\N RYVN]_^ J] J <_V^SOJW AN]SMNX^S 1X1>ANX^JV
\NZVJLNWNX^ ^Y NbS]^SXQ WY\^S]Nð

‡)URQW GF ‡6WRUDJH 5RRPV
‡+RPH RIIL ‡&DELQV
‡%DFN GRF ‡$QG PRUH

Wi-Fi Controlled*

Installation

Professional Installation Recommended
This product can be easily installed by advanced DIYers. It will only take a few minutes if pre-existing bore holes exist. It is recommended to contact a professional installer if you drilling new holes is required.

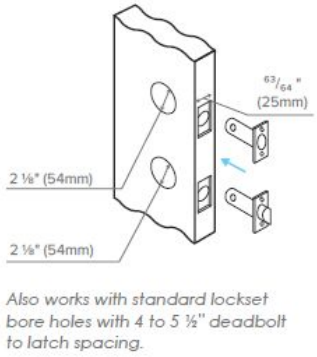

Also works with standard lockset bore holes with 4 to 5 ½" deadbolt to latch spacing.

PGA018
5.5" C2C

PGA019
4" C2C

PGA019s
4" C2C
Mortise Retrofit

Download installation guide

Download Door Drilling Template 4"

Download Door Drilling Template 5.5"

Watch installation video

Download user manual

Access and control options

Your finger is your key

Mobile app Control

Secure Scan-to-Open

Real-time smartphone alerts

Voice assistant Control

RFID Card access

Keyless access
Secure, fast, and convenient on-site set-up, allows management of properties from anywhere

Mobile App Control
Unlock, lock, check door, track access history and unique user profile data.

Offline Access Codes™
Grant access codes to trusted users. Codes work offline without Wi-Fi or Internet.

Grant Access, when you're not there
Remotely lock and unlock your door from anywhere.

Real-time Monitoring and Status
Monitor open/closed door status with real-time alerts sent to your smartphone.

Fast Pass MIFARE RFID access
Supports up to 999 cards. (3 RFID Cards included)

Secure Scan-to-Open - Unlock by unique QR code, revoke capability anytime

Auto Locking
Never worry about forgetting to lock the door with programmable auto-locking.

Wi-Fi control
Monitoring and control from anywhere and voice assistant control.

Replace the key not the lock
Re-key with readily available standard 5-pin cylinder SC1 re-key kits.

Lockly Air Transfer programming
Duplicate user profiles from an existing Lockly smart lock to PIN Genie in just a few clicks.

air TRANSFER COMPATIBLE

Specifications

Wi-Fi Controlled*

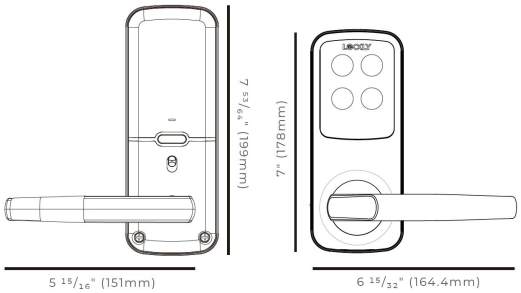

Electronic Specifications

Access Codes	Stores up to 52 PIN access codes
RFID/Fob key Access	Stores up to 999 MIFARE RFID/fob
Fingerprint Access	Stores up to 99 biometric fingerprints
Remotely Shareable Temporary Access	Unlimited* Offline Access Codes/ eBadges
Access Logs	Unlimited Accessible via LocklyPro Commercial app or Lockly\OS™
Visual and audible	Exterior: LED (Red, Green) Interior: LED (Blue) Configurable Lock/Unlock Audio Indicator
Communication standards	BLE 4.2 , Wi-Fi 2.4GHz , RF433.92MHz Advanced Encryption Standard (AES), 256-bit
Gateway communication range (networked solution)	Up to 98' (30m) BLE Up to 197' (60m) Wi-Fi Up to 164' (50m) RF433.92MHz Unobstructed open environment
Command Response	Responds to command from host in less than 3 seconds when linked to Lockly Wi-Fi Hub 0.2S on Fingerprint Recognition
Connectivity options	LocklyPro Commercial app, Lockly\OS ALL in real-time communication
Available Signal Status	Battery Status via App Open/Close Door Status Bluetooth Connectivity Indicator Sensor LED (Red/Green)
Battery Life	AA Alkaline Batteries x 4 Up to 1 year (offline mode) up to 10 months (regular use with App & Sensor
Operating temperature	-4°F to 151°F (-20°C to 66°C)
Operating Humidity	0 - 100% non-condensing

Credential Specifications

Credential technologies	RFID Card (13.56 MHz), BLE (2.4 GHz) Wi-Fi (2.4GHz) Capacitive Sensor Patented PIN Genie Keypad
Standards	ISO 1444
Maximum read range	RFID: up to 0.79" BLE: up to 98' (30m) Wi-Fi: up to 197' (60m)
RFID/Fob compatibility	MIFARE® S50
Mobile compatibility	LocklyPro Commercial app BLE 4.2 Lockly\OS™

Mechanical Specifications

Handing	Field reversible
Materials	All-metal chassis and escutcheon
Door Thickness	1-3/8" - 2 1/4" (35mm- 50mm)
Backset	Adjustable 2-3/8" or 2-3/4" (60mm or 70mm) 1" x 2 ¼" round corner faceplate
Strike	Deadbolt: 1 ⅛" x 2 ¾", round corner Latchbolt: 1 ¾" x 2 ¼", round corner, Dust box included
Bore	2-1/8 " (54mm) diameter Bore hole 1" (25mm) diameter latch hole
Physical Keys	SC1 Re-keying compatible, 2pcs included

Certifications /Warranty

Certification	RoHS FC ADA COMPLIANT
Warranty	Lifetime 24/7 Technical Support 5 -year Limited Mechanical & Finish 2 -year Limited Electronics

Ordering information

1 Edition

PGD678W DUO COMPACT

2 Wi-Fi Hub
PGH230 (included/optional))
*Wi-Fi hub required

3 Finish

SS	Stainless Steel
MB	Matte Black
AB	Aged Bronze
	Custom colors available (advanced order required)

3 Cover plate
included
4" C2C
5.5" C2C

4 Interconnection Gear Plate
included

5 Sensors
Built-in Wired Sensor (included/optional)
Wireless Door Sensor (optional)

6 Unifying Faceplate
not included/optional
PGA018 (5.5")
PGA019 (4")
PGA019s (4") mortise retrofit

7 RFID / Fob key
3 RFID tag keys (included)
PGA803WH Tag key (10pcs/pack, optional)
PGA803P Fob key (10pcs/pack, optional)

Lockly - 676 Transfer Rd., St. Paul MN 55114 U.S.A - For more information, please visit: www.lockly.com

DISCLAIMER: Lockly has made every effort at the time of publication to ensure the accuracy of the information provided herein, product specifications, configurations, system, components and options availability are all subject to change without notice to improve features, reliability or design or otherwise.